T5 FHE Luxline® Plus

FHE 21W/T5/865

0002765



Range features

PRODUCT OVERVIEW

Light colour	865 Daylight
Technology	Fluorescent
Ordering number	0002765
Energy class	A+
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G5
Type	T5 FHE Luxline Plus
EAN code	5410288027654
CRI (Ra)	85
Colour temperature (K)	6500
Luminous flux (Rated) at 25°C (lm)	1750
Efficacy (Rated) at 25°C (lm/w)	85
Watt (Nominal) (W)	21
Voltage (V)	123

T5 FHE Luxline® Plus

FHE 21W/T5/865

0002765

DATA TABLE

General data

Ordering number	0002765
Technology	Fluorescent
Average life (Nominal) (h)	24000
Energy class	A+
Lamp finish	Coated
Lamp shape	Linear
Dimmable	
Cap/Base	G5
Type	T5 FHE Luxline Plus
EAN code	5410288027654
Product name	FHE 21W/T5/865
Lamp mercury content (mg)	2.3
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
IEC Reference 3	
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Rated survival factor at 2000 h 50Hz	0.99
Rated survival factor at 4000 h 50Hz	0.98
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.94
Rated survival factor at 12000 h 50Hz	0.93
Rated survival factor at 16000 h 50Hz	0.9
Rated survival factor at 20000 h 50Hz	0.84

T5 FHE Luxline® Plus

FHE 21W/T5/865

0002765

Optical data

Light colour	865 Daylight
CRI (Ra)	85
Colour temperature (K)	6500
Luminous flux (Rated) at 25°C (lm)	1750
Luminous flux (Nominal) at 35°C (lm)	1950
Luminous flux (Nominal) at 25°C (lm)	1750
Ambient temperature for maximum luminous flux (°C)	35
Rated lumen maint. factor at 2000 h 50Hz	0.97
Rated lumen maint. factor at 4000 h 50Hz	0.95
Rated lumen maint. factor at 6000 h 50Hz	0.93
Rated lumen maint. factor at 8000 h 50Hz	0.92
Rated lumen maint. factor at 12000 h 50Hz	0.91
Rated lumen maint. factor at 16000 h 50Hz	0.9
Rated lumen maint. factor at 20000 h 50Hz	0.88

Electrical data

kWh per 1000 hours burning time	23
Efficacy (Rated) at 35°C (lm/w)	85
Efficacy (Rated) at 25°C (lm/w)	85
Watt (Nominal) (W)	21
Watt (Rated) - High frequency (W)	20.7
Watt (Rated) (W)	20.7
Voltage (V)	123
Ignition voltage (V)	0
Current (A)	0.17

Physical data


Length base to base (mm) - A	849
Length base to pin Min-Max - B	853.7-856.1
Max overall length (mm) - C	863.2
Max. Lamp Diameter (mm) - D	16
Diameter (mm)	16

T5 FHE Luxline® Plus


FHE 21W/T5/865


0002765

PHOTOMETRY

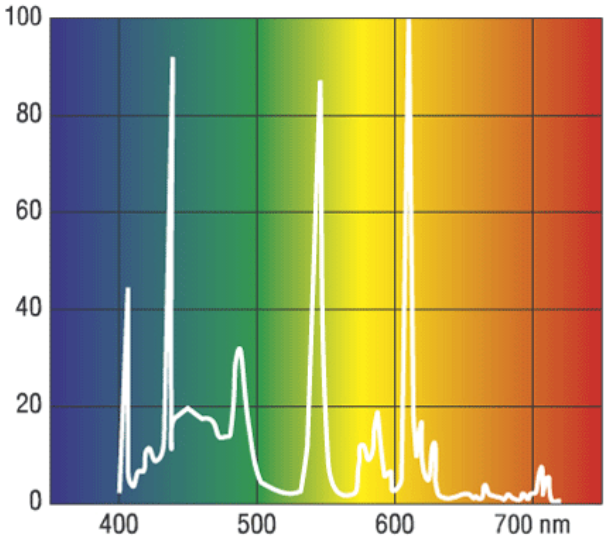

TECHNICAL DRAWINGS

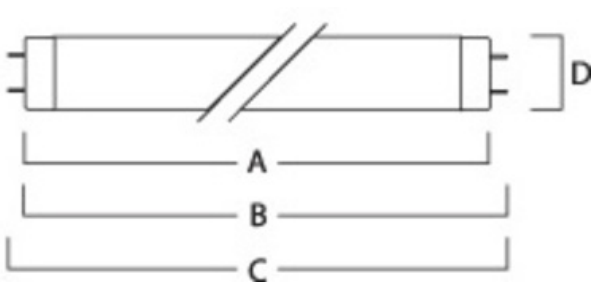

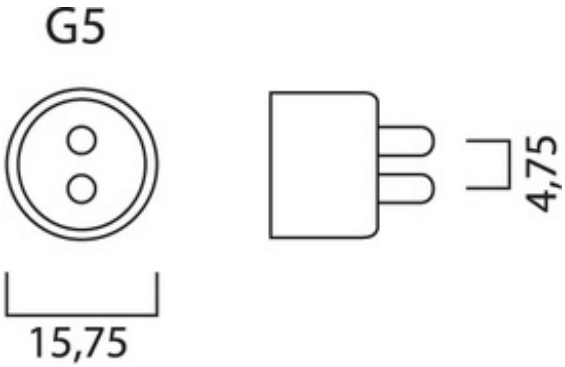

ENERGY LABEL

