T5 Short Standard / Luxline® Plus

SA T5 4W/154 G5 SLV

0000001



Range features

PRODUCT OVERVIEW

Ordering number	0000001
Technology	Fluorescent
Light colour	765 Daylight
Energy class	B
Average life (Rated) (h)	6000
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G5
Type	T5 Standard Short
EAN code	5410288000015
CRI (Ra)	75
Colour temperature (K)	6500
Luminous flux (Rated) (lm)	125
Efficacy (Rated) 100h (lm/W)	30
Watt (Nominal) (W)	4
Voltage (V)	29

T5 Short Standard / Luxline® Plus

SA T5 4W/154 G5 SLV

0000001

DATA TABLE

General data

Ordering number	0000001
Technology	Fluorescent
Average life (Nominal) (h)	10000
Energy class	B
Average life (Rated) (h)	6000
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G5
Type	T5 Standard Short
EAN code	5410288000015
E-number FI	4940232
Product name	SA T5 4W/154 G5 SLV
Lamp mercury content (mg)	
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
IEC Reference 3	
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Sales pack quantity	25
Rated survival factor at 2000 h 50Hz	1
Rated survival factor at 4000 h 50Hz	0.99
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.83
Rated survival factor at 12000 h 50Hz	
Rated survival factor at 16000 h 50Hz	
Rated survival factor at 20000 h 50Hz	

T5 Short Standard / Luxline® Plus

SA T5 4W/154 G5 SLV

0000001

Optical data

Light colour	765 Daylight
CRI (Ra)	75
Colour temperature (K)	6500
Luminous flux (Rated) (lm)	125
Luminous flux (Nominal) at 35°C (lm)	
Luminous flux (Nominal) (lm)	125
Ambient temperature for maximum luminous flux (°C)	
Rated lumen maint. factor at 2000 h 50Hz	0.88
Rated lumen maint. factor at 4000 h 50Hz	0.82
Rated lumen maint. factor at 6000 h 50Hz	0.78
Rated lumen maint. factor at 8000 h 50Hz	0.75
Rated lumen maint. factor at 12000 h 50Hz	
Rated lumen maint. factor at 16000 h 50Hz	
Rated lumen maint. factor at 20000 h 50Hz	

Electrical data

kWh per 1000 hours burning time	5
Efficacy (Rated) 100h (lm/W)	30
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	31
Watt (Rated) (W)	
Watt (Nominal) (W)	4
Voltage (V)	29
Ignition voltage (V)	0
Current (A)	0.17

Physical data


Weight (kg)	0.01
Length base to base (mm) - A	135.9
Length base to pin Min-Max - B	140.6-143.0
Max overall length (mm) - C	150.1
Max. Lamp Diameter (mm) - D	16
Diameter (mm)	16
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	15.20 x 1.70 x 1.70
Outer package dimensions (L x W x H) (cm)	9.70 x 10.40 x 16.20

T5 Short Standard / Luxline® Plus

SA T5 4W/154 G5 SLV

0000001


PHOTOMETRY

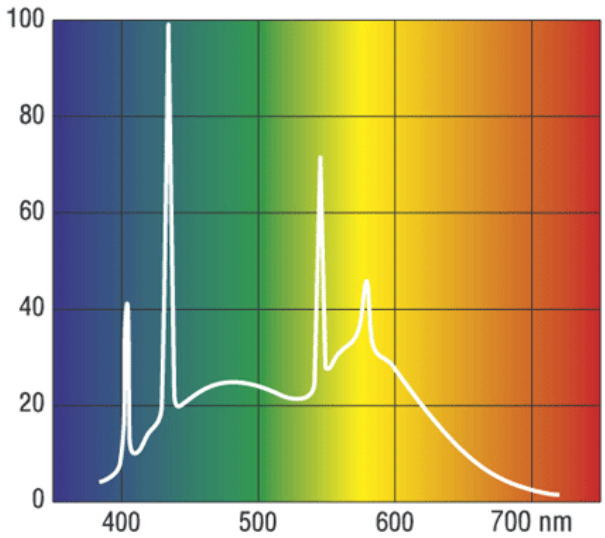


x = 0.313
y = 0.337

CRI (Ra) = 75
Tc = 6500K

TECHNICAL DRAWINGS

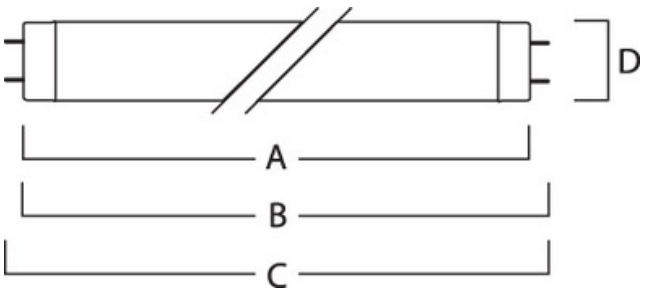

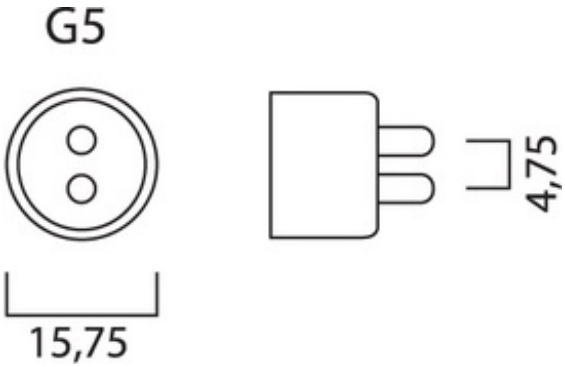

ENERGY LABEL

