

SHP-S/SHP-TS Super

SA SHP-TS 50W/CL E27 SLV

0020687



Range features

- Patented new construction featuring the Sylvania Wound Ignition Antenna for the ultimate starting reliability throughout lamp life
- Exclusive frameless construction delivers superior system efficiency and improves lumen maintenance over life
- Exceptional reliability, offering 4 years service with over 95% lumen maintenance
- Super versions with high xenon pressure boost luminous efficacy up to 150 lm/W
- Offers increased lighting levels and an extended maintenance-free service life in all road and industrial applications



PRODUCT OVERVIEW

Ordering number	0020687
Technology	HID
Light colour	0
Energy class	A
Average life (Rated) (h)	24000
Lamp shape	tubular
Lamp finish	clear
Dimmable	Yes
Cap/Base	E27
Type	SHP-TS
EAN code	5410288206875
CRI (Ra)	20
Colour temperature (K)	2050
Luminous flux (Rated) (lm)	4200
Efficacy (Rated) (lm/w)	83
Watt (Nominal) (W)	50
Voltage (V)	85

SHP-S/SHP-TS Super

SA SHP-TS 50W/CL E27 SLV

0020687

DATA TABLE

SHP-S/SHP-TS Super

SA SHP-TS 50W/CL E27 SLV

0020687

General data

Ordering number	0020687
Technology	HID
Life T90	12000
Average life (Nominal) (h)	24000
Energy class	A
Average life (Rated) (h)	24000
Lamp shape	tubular
Lamp finish	clear
Dimmable	Yes
Cap/Base	E27
Type	SHP-TS
EAN code	5410288206875
E-number FI	4845579
E-number SE	8358011
Notes	Sylvania SHP lamps can be dimmed with negligible impact on performance creating the potential for flexible light levels and reduced energy consumption.. Dimming is supported on electronic square wave ballasts and magnetic systems that can maintain the open circuit voltage. Square wave operation is recommended.. Dimming causes a reduction of light and some colour change.. We advise to start the lamps at full power and to hold this for 15 minutes before reducing the power. To avoid extinguishing the power should be adjusted gradually taking a few minutes to reach the final dimming condition.. Square wave dimming down to 50% of the rated power will have negligible impact on performance, dimming down to 35% of the rated power can affect lumen maintenance and colour appearance.. Dimming by means of voltage on magnetic systems is not advised as this increases the chance of lamp extinguishing.. Dimming by phase-cutting on magnetic systems is not allowed.. Instant dimming on magnetic systems by adding an impedance is suggested down to 50% of the rated power but the average life can be reduced.

Range features

Patented new construction featuring the Sylvania Wound Ignition Antenna for the ultimate starting reliability throughout lamp life. Exclusive frameless construction delivers superior system efficiency and improves lumen maintenance over life. Exceptional reliability, offering 4 years service with over 95% lumen maintenance. Super versions with high xenon pressure boost luminous efficacy up to 150 lm/W. Offers increased lighting levels and an extended maintenance-free service life in all road and industrial applications

Product name	SA SHP-TS 50W/CL E27 SLV
Lamp mercury content (mg)	7.2
Control gear required	yes
Fixture rating	
IEC Reference	
IEC Reference 2	
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	no
Sales pack quantity	1
Rated survival factor at 2000 h	1
Rated survival factor at 2000 h 50Hz	1
Rated survival factor at 4000 h	0.99
Rated survival factor at 4000 h 50Hz	0.99

SHP-S/SHP-TS Super

SA SHP-TS 50W/CL E27 SLV

0020687

Rated survival factor at 6000 h	0.98
Rated survival factor at 6000 h 50Hz	0.98
Rated survival factor at 8000 h	0.97
Rated survival factor at 8000 h 50Hz	0.97
Rated survival factor at 12000 h	0.9
Rated survival factor at 12000 h 50Hz	0.9
Rated survival factor at 16000 h	0.79
Rated survival factor at 16000 h 50Hz	0.79
Rated survival factor at 20000 h	0.66
Rated survival factor at 20000 h 50Hz	0.66

Optical data

Light colour	0
CRI (Ra)	20
Colour temperature (K)	2050
Luminous flux (Rated) (lm)	4200
Luminous flux (Nominal) (lm)	4200
Ambient temperature for maximum luminous flux (°C)	25
Rated lumen maint. factor at 2000 h	0.98
Rated lumen maint. factor at 4000 h	0.96
Rated lumen maint. factor at 6000 h	0.94
Rated lumen maint. factor at 8000 h	0.93
Rated lumen maint. factor at 12000 h	0.91
Rated lumen maint. factor at 16000 h	0.9
Rated lumen maint. factor at 20000 h	0.89
Rated lumen maint. factor at 2000 h 50Hz	0.98
Rated lumen maint. factor at 4000 h 50Hz	0.96
Rated lumen maint. factor at 6000 h 50Hz	0.94
Rated lumen maint. factor at 8000 h 50Hz	0.93
Rated lumen maint. factor at 12000 h 50Hz	0.91
Rated lumen maint. factor at 16000 h 50Hz	0.9
Rated lumen maint. factor at 20000 h 50Hz	0.89

Electrical data

kWh per 1000 hours burning time	55
Efficacy (Rated) (lm/w)	83
Watt (Rated) (W)	50
Watt (Nominal) (W)	50
Voltage (V)	85
Ignition voltage (V)	0
Current (A)	0.76

SHP-S/SHP-TS Super

SA SHP-TS 50W/CL E27 SLV

0020687

Physical data


Weight (kg)	0.05
Lamp Length (mm) - C/L	156
Max. Lamp Diameter (mm) - D	39
Single packaging type	Box/Sleeve
Single package dimensions (L x W x H) (cm)	20.00 x 4.20 x 4.20
Outer package dimensions (L x W x H) (cm)	42.00 x 28.00 x 21.00

SHP-S/SHP-TS Super


SA SHP-TS 50W/CL E27 SLV

0020687

PHOTOMETRY

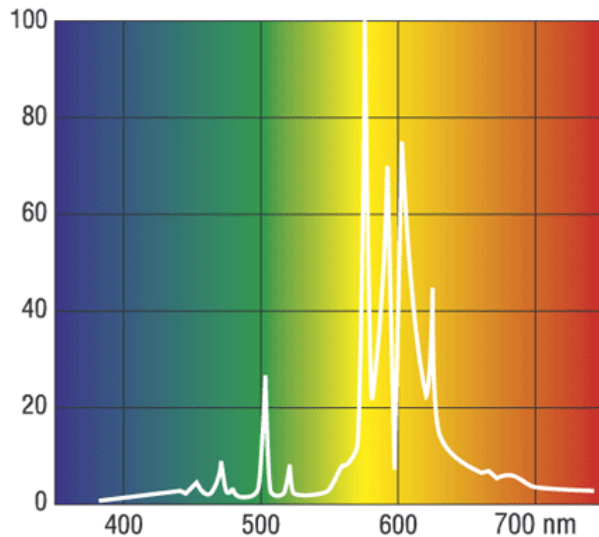


Sodium SHP-(-T)S Super

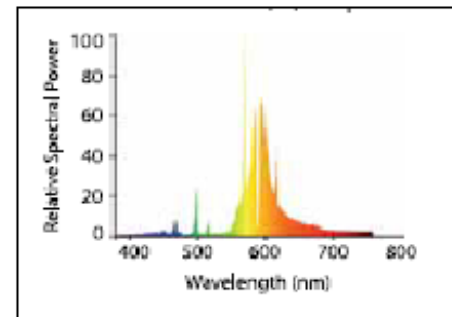


TECHNICAL DRAWINGS

SHP-TS



SHP-TS	35W	50W	70W	100W	150W	250W	400W
L	156	156	156	211	211	260	292
D	39	39	39	48	48	48	48

Lumen Maintenance curve:
SHP-(-T)S Super 50

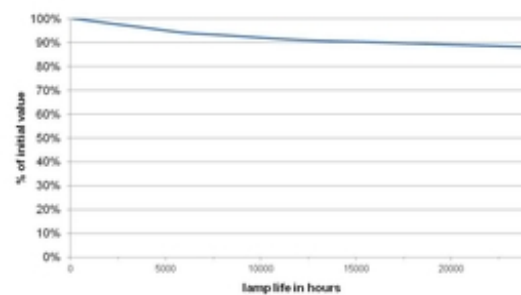

ENERGY LABEL

