T5 FHE Luxline® Plus

FHE 28W/T5/835

0002789



Range features

PRODUCT OVERVIEW

Light colour	835 White
Technology	Fluorescent
Ordering number	0002789
Energy class	A+
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G5
Type	T5 FHE Luxline Plus
EAN code	5410288027890
CRI (Ra)	85
Colour temperature (K)	3500
Luminous flux (Rated) at 25°C (lm)	2600
Efficacy (Rated) at 25°C (lm/w)	93
Watt (Nominal) (W)	28
Voltage (V)	166

T5 FHE Luxline® Plus

FHE 28W/T5/835

0002789

DATA TABLE

General data

Ordering number	0002789
Technology	Fluorescent
Average life (Nominal) (h)	24000
Energy class	A+
Lamp finish	Coated
Lamp shape	Linear
Dimmable	
Cap/Base	G5
Type	T5 FHE Luxline Plus
EAN code	5410288027890
Product name	FHE 28W/T5/835
Lamp mercury content (mg)	2.3
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
IEC Reference 3	
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Rated survival factor at 2000 h 50Hz	0.99
Rated survival factor at 4000 h 50Hz	0.98
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.94
Rated survival factor at 12000 h 50Hz	0.93
Rated survival factor at 16000 h 50Hz	0.9
Rated survival factor at 20000 h 50Hz	0.84

T5 FHE Luxline® Plus

FHE 28W/T5/835

0002789

Optical data

Light colour	835 White
CRI (Ra)	85
Colour temperature (K)	3500
Luminous flux (Rated) at 25°C (lm)	2600
Luminous flux (Nominal) at 35°C (lm)	2900
Luminous flux (Nominal) at 25°C (lm)	2600
Ambient temperature for maximum luminous flux (°C)	35
Rated lumen maint. factor at 2000 h 50Hz	0.97
Rated lumen maint. factor at 4000 h 50Hz	0.95
Rated lumen maint. factor at 6000 h 50Hz	0.93
Rated lumen maint. factor at 8000 h 50Hz	0.92
Rated lumen maint. factor at 12000 h 50Hz	0.91
Rated lumen maint. factor at 16000 h 50Hz	0.9
Rated lumen maint. factor at 20000 h 50Hz	0.88

Electrical data

kWh per 1000 hours burning time	31
Efficacy (Rated) at 35°C (lm/w)	93
Efficacy (Rated) at 25°C (lm/w)	93
Watt (Nominal) (W)	28
Watt (Rated) - High frequency (W)	27.9
Watt (Rated) (W)	27.9
Voltage (V)	166
Ignition voltage (V)	0
Current (A)	0.17

Physical data


Length base to base (mm) - A	1149
Length base to pin Min-Max - B	1153.7-1156.1
Max overall length (mm) - C	1163.2
Max. Lamp Diameter (mm) - D	16
Diameter (mm)	16

T5 FHE Luxline® Plus

FHE 28W/T5/835

0002789

TECHNICAL DRAWINGS

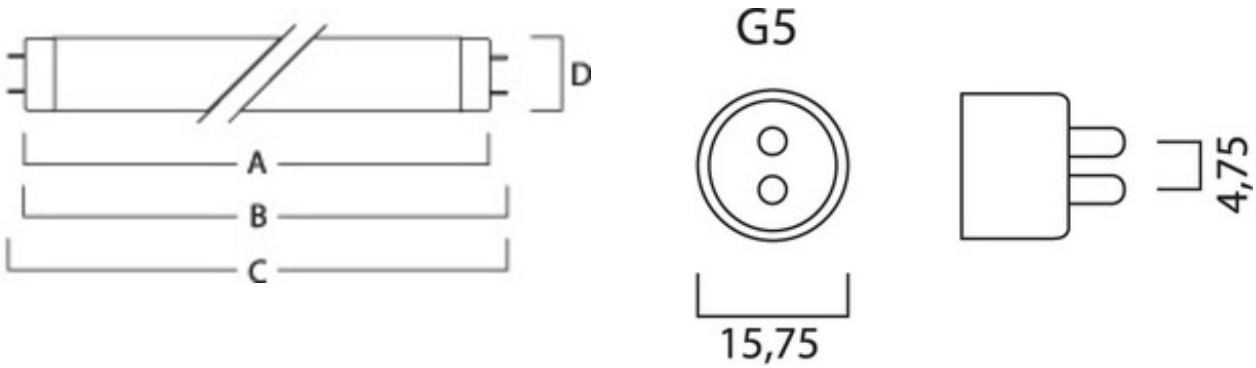

ENERGY LABEL

