LumiStrip High Output

LumiStrip HO IP65 5M NW

3036975



Range features

- 5m high brightness LED reel, ranging from 24W to 115W outputs. Up to 10,500lm. IP67 silicon sleeve (UV, salt and corrosion resistant) incl. 25 x200mm clear PC mounting strips with 3M adhesive tape and 10 end caps. IP20 version includes pre-attached 3M mounting tape.

PRODUCT OVERVIEW

Technology	420 High brightness LEDs (5 Step SDCM)
Ordering number	3036975
Light colour	Neutral w hite
Average life (Rated) (h)	50000
EAN code	8711971369752
Certifications	CE
Mount	Surface mounted
Housing	Silicon
CRI (Ra)	80
LOR (%)	100
Beam angle(°)	120
Colour temperature (K)	4000
Luminous flux (lm)	7020 (1404/metre)
Luminous flux (Rated) (lm)	7200
Efficacy (Rated) (lm/w)	85.609756097561
Voltage (V)	24
Included lamp	Integrated LED
IP rating	65

LumiStrip High Output

LumiStrip HO IP65 5M NW

3036975

DATA TABLE

General data

Ordering number	3036975
Technology	420 High brightness LEDs (5 Step SDCM)
Average life (Rated) (h)	50000
EAN code	8711971369752
Certifications	CE
Mount	Surface mounted
Range features	5m high brightness LED reel, ranging from 24W to 115W outputs. Up to 10,500lm. IP67 silicon sleeve (UV, salt and corrosion resistant) incl. 25 x200mm clear PC mounting strips w ith 3M adhesive tape and 10 end caps. IP20 version includes pre-attached 3M mounting tape.
Product name	LumiStrip HO IP65 5M NW
Control gear availability	(seperate item)
Control gear type	(seperate item)
Environment	External (seperate item)
General application	Leisure, Office, Residential, Shop, Galleries, Hotels, Restaurants, Cafes, Bars
Housing	Silicon

Optical data

Light colour	Neutral w hite
CRI (Ra)	80
LOR (%)	100
Beam angle(°)	120
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	7200
Luminous flux (Nominal) (lm)	7200
Luminous flux (lm)	7020 (1404/metre)
Ambient temperature for maximum luminous flux (°C)	-25 to +60
Distribution type	Direct

Electrical data

Efficacy (Rated) (lm/w)	85.609756097561
Total power consumption (W)	82 (16/metre)
Voltage (V)	24
Ta rating	-25 to +50
Electrical protection	Class III
Glow wire test	650°C

LumiStrip High Output

LumiStrip HO IP65 5M NW

3036975

Physical data


Weight (kg)	0.35
Lamp included	Integrated LED
Included lamp	Integrated LED
Height (mm)	4
Width (mm)	14
Length (mm)	5000
IP rating	65
Diffuser finish	Clear
Diffuser material	Silicon


LumiStrip High Output

LumiStrip HO IP65 5M NW

3036975

PHOTOMETRY

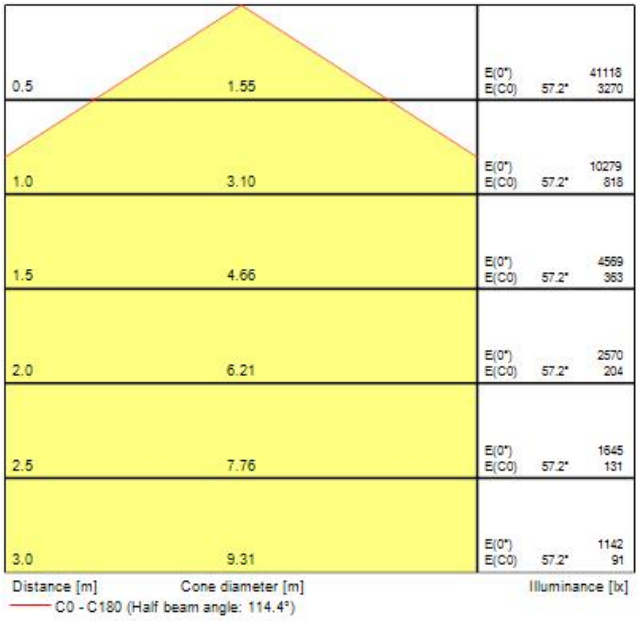

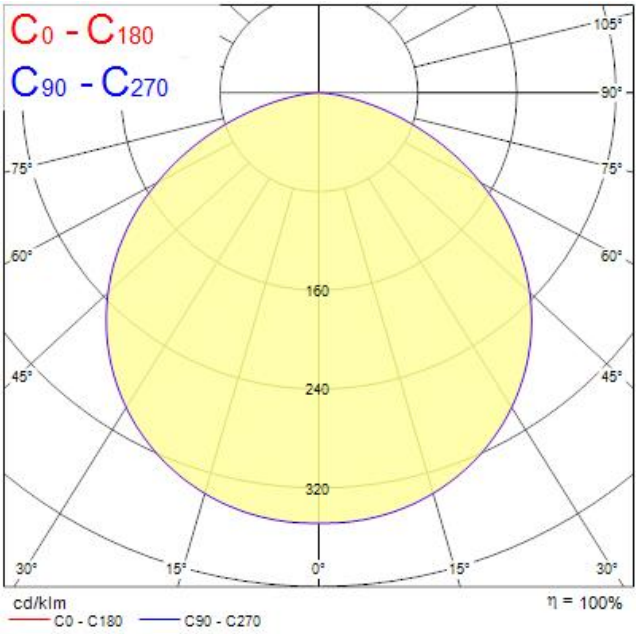

ENERGY LABEL

