

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K ELE WH EM

2050668



Range features

- New high output high efficiency LED downlight modules
- IR/UV free light source without heat radiation
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Long life up to 50K hours, fit and forget maintenance free lighting solution
- Dimmable options including DALI as standard
- IP44 & IP65 versions as standard options
- New range of Architectural accessories each providing a different lit dimension
- Wide choice of colour temperatures warm 3000K, neutral 4000K & cool 5000K
- Luminaires supplied complete with LED drivers
- Emergency versions passes through cut out
- New completely flush plaster up accessory ring for clean ceiling lines and smooth finish
- Total circuit power 15W



PRODUCT OVERVIEW

Ordering number	2050668
Technology	LED
EAN code	5025768506682
Certifications	F-mark
Mount	Ceiling recessed
LOR (%)	100
Beam angle(°)	30°
Colour temperature (K)	3000
Lamps	13W Citizen Cited w arm 3000K
Included lamp	Integrated LED
IP rating	65

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K ELE WH EM

2050668

DATA TABLE

General data

Ordering number	2050668
Technology	LED
EAN code	5025768506682
Certifications	F-mark
Mount	Ceiling recessed
Range features	New high output high efficiency LED downlight modules. IR/UV free light source without heat radiation. Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen. Long life up to 50K hours, fit and forget maintenance free lighting solution. Dimmable options including DALI as standard. IP44 & IP65 versions as standard options. New range of Architectural accessories each providing a different lit dimension. Wide choice of colour temperatures warm 3000K, neutral 4000K & cool 5000K. Luminaires supplied complete with LED drivers. Emergency versions passes through cut out. New completely flush plaster up accessory ring for clean ceiling lines and smooth finish. Total circuit power 15W
Product name	MYRIAD SS IP65 3000K ELE WH EM
Control gear type	Electronic + Emergency
Environment	Interior
General application	Hotel, Museum & Gallery
Specific application	Bathrooms, Corridors, Foyer, Reception Areas, Restaurant, Shop window, Shopping Centres, Washrooms
Sales pack quantity	1

Optical data

LOR (%)	100
Beam angle (°)	30°
Colour temperature (K)	3000
Distribution type	Direct symmetrical

Electrical data

Electrical protection	Class II
Lamps	13W Citizen Cited w arm 3000K
Leading trailing edge	No
Number of heads	1
Transformer availability	Included
Transformer mounting	Integral
Total number of lamps	1

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K ELE WH EM

2050668

Physical data


Weight (kg)	1.37
Lamp included	Yes
Included lamp	Integrated LED
IP rating	65
Cutout diameter (mm)	75
Cutout shape	Round
Recessed depth (mm)	72
Diffuser material	Glass
Emergency	Included
Emergency type	Integral
Single package dimensions (L x W x H) (cm)	27.50 x 25.00 x 12.50
Outer package dimensions (L x W x H) (cm)	27.50 x 25.00 x 12.50

Myriad V LED - IP65 Glass White Bezel

MYRIAD SS IP65 3000K ELE WH EM

2050668

PHOTOMETRY

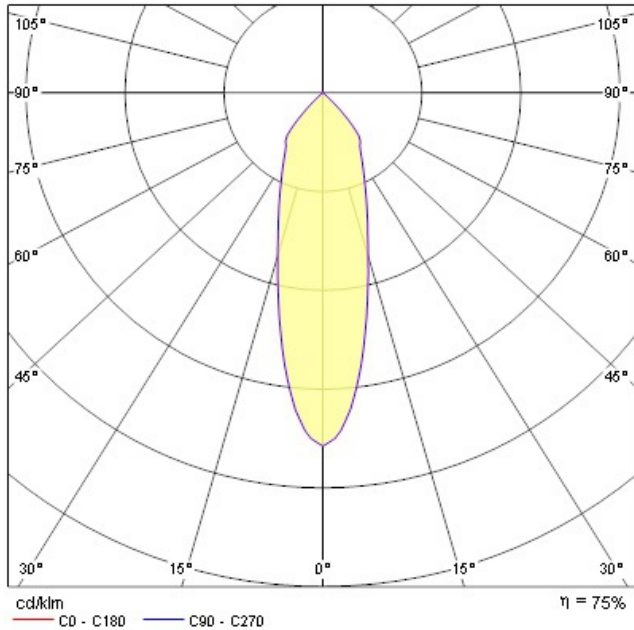


0.5	0.26	E(0°) E(C0)	14.8°	4580 2072
1.0	0.53	E(0°) E(C0)	14.8°	1145 518
1.5	0.79	E(0°) E(C0)	14.8°	509 230
2.0	1.06	E(0°) E(C0)	14.8°	286 129
2.5	1.32	E(0°) E(C0)	14.8°	183 83
3.0	1.59	E(0°) E(C0)	14.8°	127 58

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 29.6°)

TECHNICAL DRAWINGS

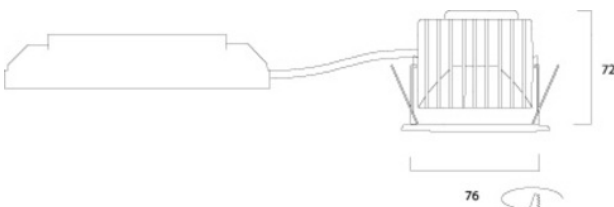

ENERGY LABEL

