T5 Short Standard / Luxline® Plus

SA T5 4W/133 G5 SLV

0000003



Range features

PRODUCT OVERVIEW

Light colour	640 Cool White
Technology	Fluorescent
Ordering number	0000003
Energy class	B
Lamp shape	Linear
Lamp finish	Coated
Dimmable	
Cap/Base	G5
Type	T5 Standard Short
EAN code	5410288000039
CRI (Ra)	64
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	140
Efficacy (Rated) 100h (lm/W)	35
Watt (Nominal) (W)	4
Voltage (V)	29

T5 Short Standard / Luxline® Plus

SA T5 4W/133 G5 SLV

0000003

DATA TABLE

General data

Ordering number	0000003
Technology	Fluorescent
Average life (Nominal) (h)	10000
Energy class	B
Lamp finish	Coated
Lamp shape	Linear
Dimmable	
Cap/Base	G5
Type	T5 Standard Short
EAN code	5410288000039
Product name	SA T5 4W/133 G5 SLV
Lamp mercury content (mg)	
Control gear required	Yes
Fixture rating	Open
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
IEC Reference 3	
Intended purpose	General lighting
Special purpose lamp	No
Transformer required	No
Rated survival factor at 2000 h 50Hz	1
Rated survival factor at 4000 h 50Hz	0.99
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.83
Rated survival factor at 12000 h 50Hz	
Rated survival factor at 16000 h 50Hz	
Rated survival factor at 20000 h 50Hz	

T5 Short Standard / Luxline® Plus

SA T5 4W/133 G5 SLV

0000003

Optical data

Light colour	640 Cool White
CRI (Ra)	64
Colour temperature (K)	4000
Luminous flux (Rated) (lm)	140
Luminous flux (Nominal) at 35°C (lm)	
Luminous flux (Nominal) (lm)	140
Ambient temperature for maximum luminous flux (°C)	
Rated lumen maint. factor at 2000 h 50Hz	0.88
Rated lumen maint. factor at 4000 h 50Hz	0.82
Rated lumen maint. factor at 6000 h 50Hz	0.78
Rated lumen maint. factor at 8000 h 50Hz	0.75
Rated lumen maint. factor at 12000 h 50Hz	
Rated lumen maint. factor at 16000 h 50Hz	
Rated lumen maint. factor at 20000 h 50Hz	

Electrical data

kWh per 1000 hours burning time	5
Efficacy (Rated) 100h (lm/W)	35
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	35
Watt (Rated) (W)	4
Watt (Nominal) (W)	4
Voltage (V)	29
Ignition voltage (V)	0
Current (A)	0.17

Physical data


Length base to base (mm) - A	135.9
Length base to pin Min-Max - B	140.6-143.0
Max overall length (mm) - C	150.1
Max. Lamp Diameter (mm) - D	16
Diameter (mm)	16

T5 Short Standard / Luxline® Plus

SA T5 4W/133 G5 SLV

0000003


PHOTOMETRY

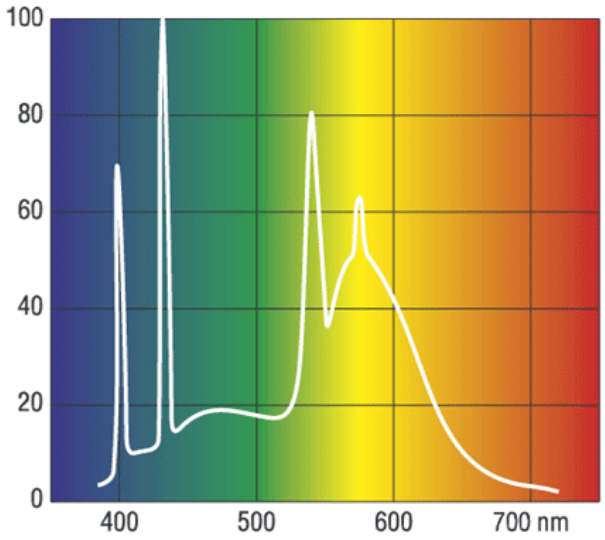


x = 0.380
y = 0.380

CRI (Ra) = 64
Tc = 4300K

TECHNICAL DRAWINGS

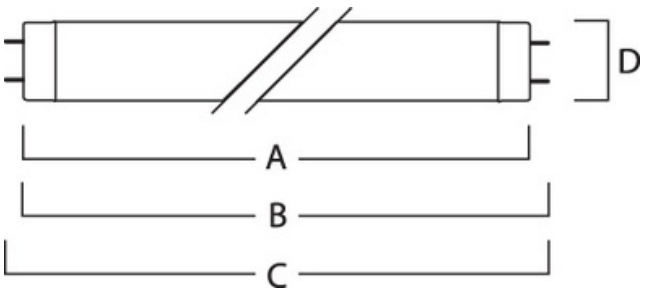

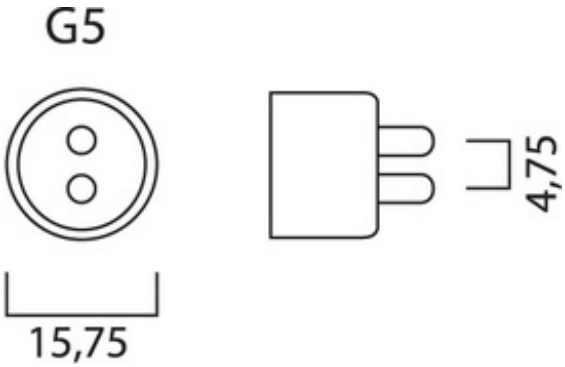

ENERGY LABEL

