

ECO Kit LED

INSTAR ECO KIT LED BA 36° 2700K DIM

3079349



Range features

- IP44 Accent downlight perfect for 50W Halogen retrofits. Optimal solution in size and luminous efficiency for hospitality accent and display lighting applications. The Eco Kit also comes including a Dimmable driver



PRODUCT OVERVIEW

Technology	LED
Ordering number	3079349
Average life (Rated) (h)	30000
Mount	Ceiling recessed
Housing	Aluminium
LOR (%)	1
Beam angle(°)	36
Colour temperature (K)	2700
Luminous flux (lm)	450
Voltage (V)	220-240
Colour	Brushed Aluminium
IP rating	44
IK rating	2

ECO Kit LED

INSTAR ECO KIT LED BA 36° 2700K DIM

3079349

DATA TABLE

General data

Ordering number	3079349
Technology	LED
Average life (Rated) (h)	30000
Mount	Ceiling recessed
Range features	IP44 Accent downlight perfect for 50W Halogen retrofits. Optimal solution in size and luminous efficiency for hospitality accent and display lighting applications. The Eco Kit also comes including a Dimmable driver
Product name	INSTAR ECO KIT LED BA 36° 2700K DIM
Control gear availability	Electronic
Control gear type	External
Environment	Interior/Exterior
Housing	Aluminium

Optical data

LOR (%)	1
Beam angle(°)	36
Colour temperature (K)	2700
Luminous flux (lm)	450
Distribution type	Direct

Electrical data

Total power consumption (W)	10
Voltage (V)	220-240
Drive current (mA)	800mA
Electrical protection	CLASS II

Physical data


Colour	Brushed Aluminium
Lamp included	Integrated LED
Height (mm)	50mm
Width (mm)	78mm
Length (mm)	78mm
IP rating	44
IK rating	2
Diffuser finish	Clear
Diffuser material	Glass
Reflector finish	Bright Aluminium Reflector

ECO Kit LED

INSTAR ECO KIT LED BA 36° 2700K DIM

3079349

PHOTOMETRY

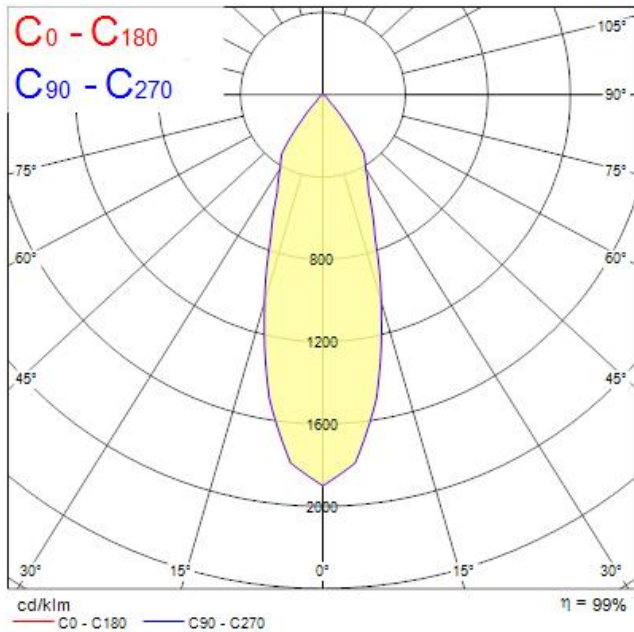

TECHNICAL DRAWINGS

