

Insaver HE Topper LED

INSAVER 150 HE TOPPER LED NW PIR PLUS3

3033925



Range features

- Low recess and cost effective IP44 LED downlight with intergrated PIR sensor.



PRODUCT OVERVIEW

Light colour	Cool w hite
Technology	LED
Ordering number	3033925
Average life (Rated) (h)	50000
Dimmable	Non-dim / not dimmable (sw itched only)
EAN code	8711971339250
Certifications	CE
Mount	Ceiling recessed
Housing	Aluminium
CRI (Ra)	80
LOR (%)	100
Beam angle(°)	64-69
Colour temperature (K)	4000
Luminous flux (lm)	604
Efficacy (Rated) (lm/w)	67.1
Voltage (V)	220-240
Colour	White
IP rating	44
IK rating	2

Insaver HE Topper LED

INSAVER 150 HE TOPPER LED NW PIR PLUS3

3033925

DATA TABLE

General data

Ordering number	3033925
Technology	LED
Average life (Rated) (h)	50000
Dimmable	Non-dim / not dimmable (switched only)
EAN code	8711971339250
Certifications	CE
Mount	Ceiling recessed
Range features	Low recess and cost effective IP44 LED downlight with integrated PIR sensor.
Product name	INSAVER 150 HE TOPPER LED NW PIR PLUS3
Control gear type	Electronic
Environment	External
General application	Indoor Hospitality, Corridors, Changing rooms, Bathrooms
Housing	Aluminium

Optical data

Light colour	Cool white
CRI (Ra)	80
LOR (%)	100
Beam angle(°)	64-69
Colour temperature (K)	4000
Luminous flux (lm)	604
Distribution type	Direct

Electrical data

Efficacy (Rated) (lm/w)	67.1
Total power consumption (W)	9
Voltage (V)	220-240
Drive current (mA)	350
Electrical protection	Class II
Glow wire test	650

Insaver HE Topper LED

INSAVER 150 HE TOPPER LED NW PIR PLUS3

3033925

Physical data



Weight (kg)	0.8
Colour	White
Lamp included	Integrated LED
Height (mm)	55
Width (mm)	165
Length (mm)	165
IP rating	44
IK rating	2
Cutout diameter (mm)	145 x 145
Cutout shape	Round
Diffuser finish	Opal
Diffuser material	Polycarbonate
Reflector finish	Diffuser

Insaver HE Topper LED

INSAVER 150 HE TOPPER LED NW PIR PLUS3

3033925

PHOTOMETRY

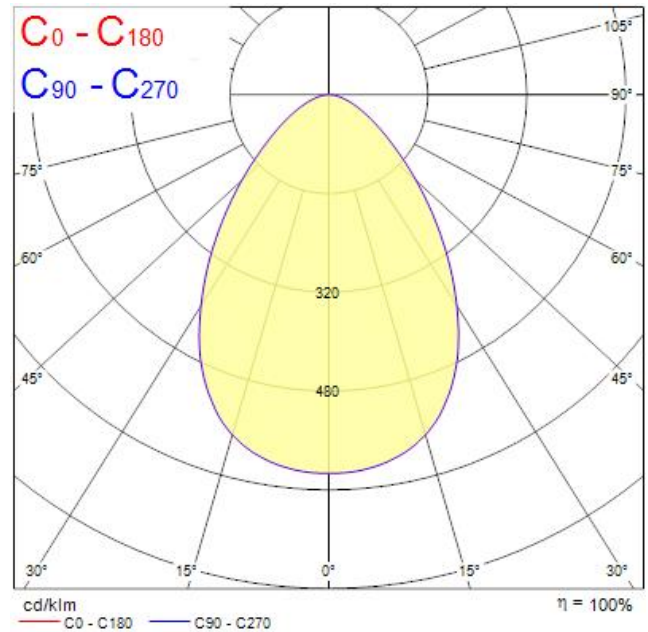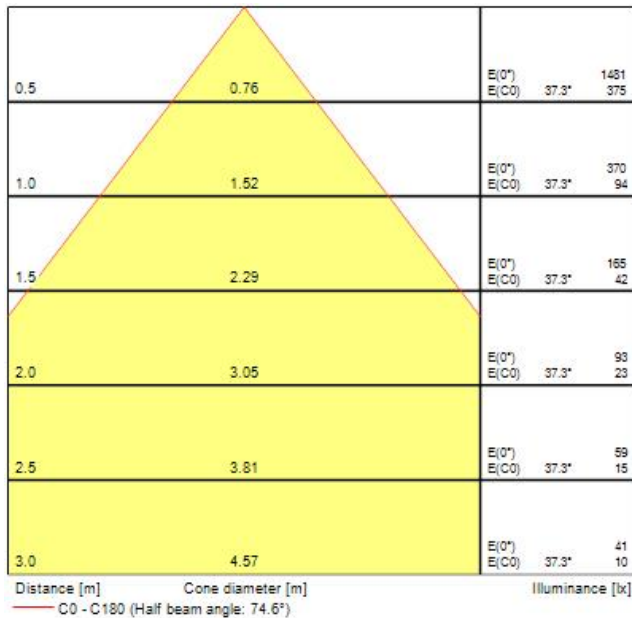

TECHNICAL DRAWINGS

