Hi-Pin G9 ECO

HI-PIN ECO 230V 53W G9 SV1

0022846



Range features

- Xenon technology
- Less CO2 emissions - ECO Friendly
- Less heat generation than standard G9 capsules - more design freedom for luminaire manufacturers
- Compact size
- Integral safety fuse
- Suitable for use in open luminaires following Luminaire Standard EN 60598-1
- Easy installation with G9 plug-in base
- Transformer free operation
- 100% dimmable
- Average life of 1000hrs or 2000hrs

UV STOP

PRODUCT OVERVIEW

Ordering number	0022846
Light colour	828 Homelight
Technology	Halogen
Energy class	D
Average life (Rated) (h)	2000
Lamp finish	clear
Lamp shape	Capsule
Dimmable	Yes
Cap/Base	G9
Type	Capsule
EAN code	5410288228464
CRI (Ra)	100
Beam angle(°)	na
Colour temperature (K)	2800
Luminous flux (Rated) (lm)	845
Watt (Nominal) (W)	53
Voltage (V)	230

Hi-Pin G9 ECO

HI-PIN ECO 230V 53W G9 SV1

0022846

DATA TABLE

General data

Ordering number	0022846
Technology	Halogen
Average life (Nominal) (h)	2000
Average life (Rated) (h)	2000
Energy saving lamp	No
Energy class	D
Lamp shape	Capsule
Lamp finish	clear
Dimmable	Yes
Cap/Base	G9
Type	Capsule
EAN code	5410288228464
Range features	Xenon technology. Less CO2 emissions - ECO Friendly. Less heat generation than standard G9 capsules - more design freedom for luminaire manufacturers. Compact size. Integral safety fuse. Suitable for use in open luminaires following Luminaire Standard EN 60598-1. Easy installation with G9 plug-in base. Transformer free operation. 100% dimmable. Average life of 1000hrs or 2000hrs
Product name	HI-PIN ECO 230V 53W G9 SV1
Lamp mercury content (mg)	0
Starting time (max) (s)	0.01
Warm-up time to 60% of full light (max) (s)	Instant full light
Control gear required	No
Fixture rating	Open
IEC Reference	IEC 60357
IEC Reference 2	IEC 60432-3
ILCOS code	HSGST/F/UB-53-230-G9
Intended purpose	General lighting
No. of switching cycles before premature failure (min)	> 8000
Special purpose lamp	No
Transformer required	No
Sales pack quantity	10
Optimal operating condition (°C)	25

Optical data

Light colour	828 Homelight
CRI (Ra)	100
Suitable for accent lighting	No
Beam angle(°)	na
Colour temperature (K)	2800
Luminous flux (Rated) (lm)	845
Lumen maintenance at end of nominal life (%)	80
Luminous flux (Nominal) (lm)	845

Hi-Pin G9 ECO

HI-PIN ECO 230V 53W G9 SV1

0022846

Electrical data

kWh per 1000 hours burning time	53
Watt (Rated) (W)	53
Watt (Nominal) (W)	53
Voltage (V)	230
Lamp power factor	1

Physical data


Weight (kg)	0.00
Lamp Length (mm) - C/L	44
Max. Lamp Diameter (mm) - D	14
Single packaging type	Blister
Single package dimensions (L x W x H) (cm)	6.80 x 2.40 x 2.40
Inner package dimensions (L x W x H) (cm)	13.90 x 13.20 x 2.80
Inner package net weight (kg)	0.04
Outer package dimensions (L x W x H) (cm)	27.00 x 15.00 x 15.00


Hi-Pin G9 ECO

HI-PIN ECO 230V 53W G9 SV1

0022846

TECHNICAL DRAWINGS

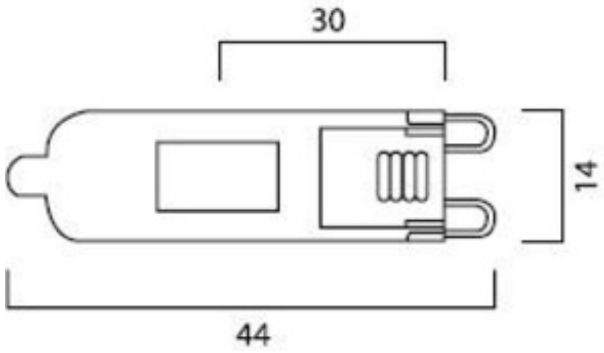

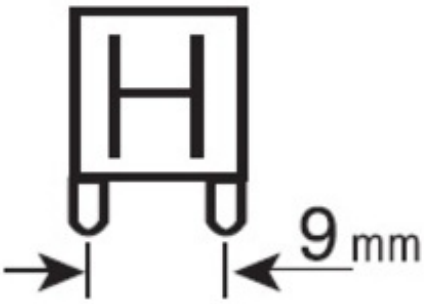

ENERGY LABEL

