

Instar Trend 75 Swing Indoor

QR-CB51 50W GU/GX5.3

3079061



Range features

- Compact designed
- Tilt 2x25°
- Quick and easy installation
- Outdoor version stainless steel



PRODUCT OVERVIEW

Ordering number	3079061
EAN code	8711971790617
Certifications	
Mount	Ceiling recessed
Voltage (V)	12
Lamps	1x50W QR-CBC51 GU/GX5.3
Colour	Brushed aluminium
IP rating	44

Instar Trend 75 Swing Indoor

QR-CB51 50W GU/GX5.3

3079061

DATA TABLE

General data

Ordering number	3079061
EAN code	8711971790617
E-number SE	7461924
E-number FI	4274924
Certifications	
Mount	Ceiling recessed
Notes	Minimum recess dimensions: 400×400×140mm with F-mark, without F-mark 250×250×100mm
Range features	Compact designed . Tilt 2x25°. Quick and easy installation. Outdoor version stainless steel
Product name	QR-CB51 50W GU/GX5.3
Environment	Interior
General application	Commercial, Hospitality
National safety marks	CE
Specific application	Commercial, Leisure, Offices
Sales pack quantity	1

Optical data

Distribution type	Direct - Adjustable
-------------------	---------------------

Electrical data

Voltage (V)	12
T Class min (°C)	-1
T Class max (°C)	-1
Electrical protection	Class III
Glow wire test	850°C
Lamps	1x50W QR-CBC51 GU/GX5.3
Number of heads	1
Transformer availability	Separate item
Transformer mounting	Remote

Instar Trend 75 Swing Indoor

QR-CB51 50W GU/GX5.3

3079061

Physical data



Weight (kg)	0.15
Colour	Brushed aluminium
Lamp included	No
IP rating	44
Vertical tilt (°)	25°
Cutout diameter (mm)	75
Cutout shape	Round
Diameter (mm)	95
Recessed depth (mm)	90
Emergency	Without
Single package dimensions (L x W x H) (cm)	13.00 x 10.00 x 8.00
Outer package dimensions (L x W x H) (cm)	13.00 x 10.00 x 8.00

Instar Trend 75 Swing Indoor


QR-CB51 50W GU/GX5.3

3079061

PHOTOMETRY

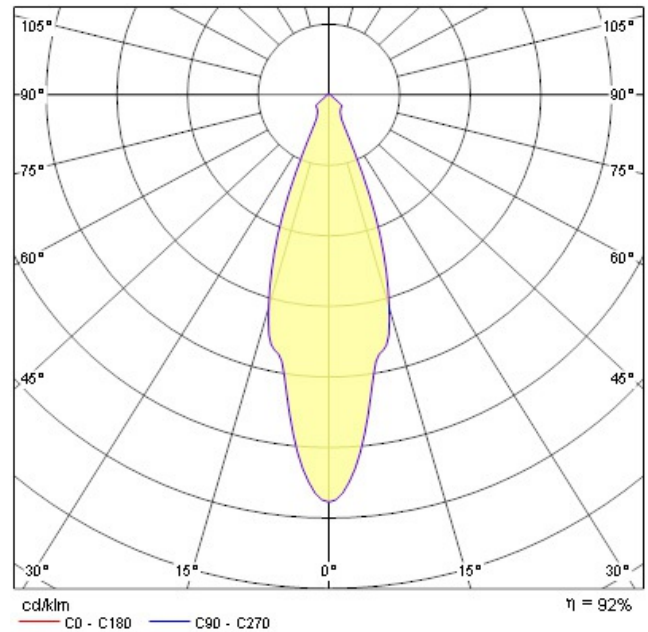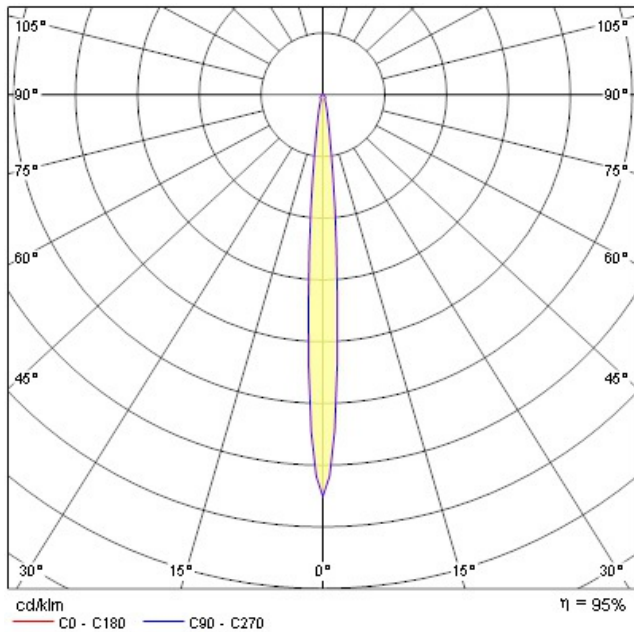

TECHNICAL DRAWINGS



75 Swing in- and outdoor
minimum recess dimensions:
400x400x140mm

250x250x100mm



ENERGY LABEL

