

Myriad Square - IP65 Flood

MYRIDSQ IP65 FLD 3K DIM Wht

2056394



Range features

- New high output high efficiency LED downlight modules
- IR/UV - free light source without heat radiation
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Dimmable options including DALI as standard
- IP65 with White bezel
- New range of Architectural accessories each providing a different lit dimension
- Colour temperatures warm 3000K White Reflector
- Luminaires supplied complete with LED drivers
- Emergency versions pass through cut out
- 48 degrees
- Total circuit power I5W



PRODUCT OVERVIEW

Ordering number	2056394
Technology	LED
Average life (Rated) (h)	50000
Dimmable	Yes
EAN code	5025768563944
Mount	Ceiling recessed
Housing	Aluminium
LOR (%)	100
Beam angle(°)	48
Colour temperature (K)	3000
Luminous flux (lm)	983
Voltage (V)	230/240
Colour	Aluminium
Included lamp	Integrated LED
IP rating	65
IK rating	02

Myriad Square - IP65 Flood

MYRIDSQ IP65 FLD 3K DIM Wht

2056394

DATA TABLE

General data

Technology	LED
Ordering number	2056394
Average life (Rated) (h)	50000
Dimmable	Yes
EAN code	5025768563944
Mount	Ceiling recessed
Range features	New high output high efficiency LED downlight modules. IR/UV - free light source without heat radiation. Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen. Dimmable options including DALI as standard. IP65 with White bezel. New range of Architectural accessories each providing a different lit dimension. Colour temperatures warm 3000K White Reflector. Luminaires supplied complete with LED drivers. Emergency versions pass through cut out. 48 degrees. Total circuit power 15W
Product name	MYRIDSQ IP65 FLD 3K DIM Wht
Control gear availability	Yes
Environment	Interior
Housing	Aluminium
Sales pack quantity	1

Optical data

LOR (%)	100
Beam angle (°)	48
Colour temperature (K)	3000
Luminous flux (lm)	983

Electrical data

Efficacy (Rated) (lm/w)	65.5
Total power consumption (W)	15
Voltage (V)	230/240
Drive current (mA)	350
Total number of lamps	1

Myriad Square - IP65 Flood

MYRIDSQ IP65 FLD 3K DIM Wht

2056394

Physical data


Weight (kg)	0.39
Colour	Aluminium
Lamp included	Yes
Included lamp	Integrated LED
Width (mm)	72
IP rating	65
IK rating	02
Cutout diameter (mm)	72
Cutout shape	Square
Recessed depth (mm)	64
Emergency	No
Reflector finish	White
Single package dimensions (L x W x H) (cm)	17.50 x 15.00 x 17.50
Outer package dimensions (L x W x H) (cm)	17.50 x 15.00 x 17.50

Myriad Square - IP65 Flood


MYRIDSQ IP65 FLD 3K DIM Wht

2056394

PHOTOMETRY

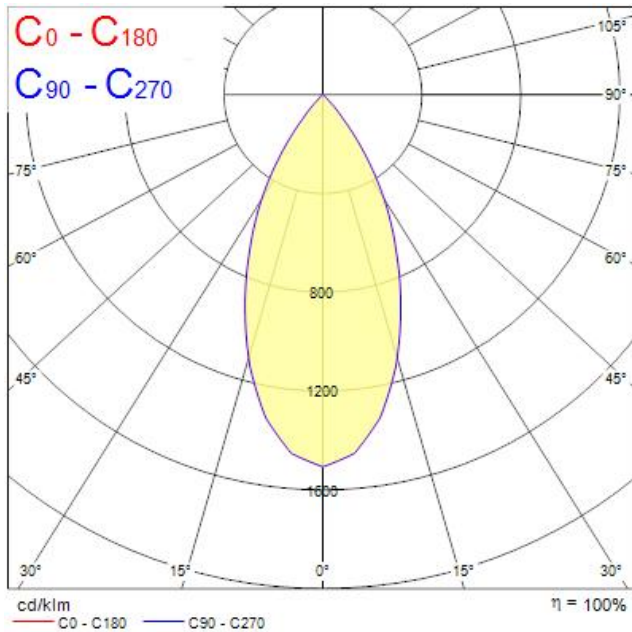

TECHNICAL DRAWINGS

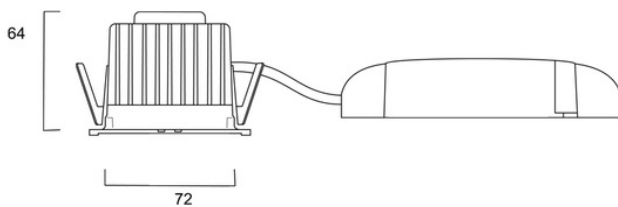

ENERGY LABEL

