



Shield terminal, for direct shield attachment on conductive mounting plates, diameter 3-8 mm

|                                 |                      |
|---------------------------------|----------------------|
| terminal contact spacing        | 12 mm                |
| <b>Connections</b>              |                      |
| connectable cable cross-section |                      |
| • minimum                       | 3 mm                 |
| • maximum                       | 8 mm                 |
| type of electrical connection   | screw-type terminals |
| <b>Mechanical Design</b>        |                      |
| height                          | 47.2 mm              |
| fastening method                | direct assembly      |
| <b>Approvals Certificates</b>   |                      |
| General Product Approval        | other                |





[Confirmation](#)



[Confirmation](#)

[Miscellaneous](#)

|                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Further information</b>                                                                                                                                                                                                                                       |
| Information on the packaging<br><a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>                                                                                          |
| Information- and Downloadcenter (Catalogs, Brochures,...)<br><a href="http://www.siemens.com/lowvoltage/catalogs">http://www.siemens.com/lowvoltage/catalogs</a>                                                                                                 |
| Industry Mall (Online ordering system)<br><a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH9130-0AA00">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH9130-0AA00</a>                                          |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,...)<br><a href="https://support.industry.siemens.com/cs/ww/en/ps/8WH9130-0AA00">https://support.industry.siemens.com/cs/ww/en/ps/8WH9130-0AA00</a>                                                |
| Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)<br><a href="http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH9130-0AA00">http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH9130-0AA00</a> |
| CAX-Online-Generator<br><a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>                                                                                                                                                                      |
| Tender specifications<br><a href="http://www.siemens.com/specifications">http://www.siemens.com/specifications</a>                                                                                                                                               |

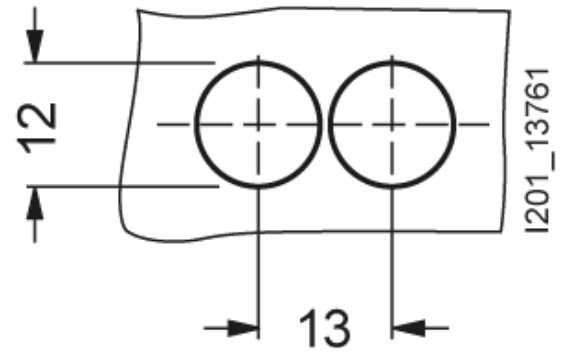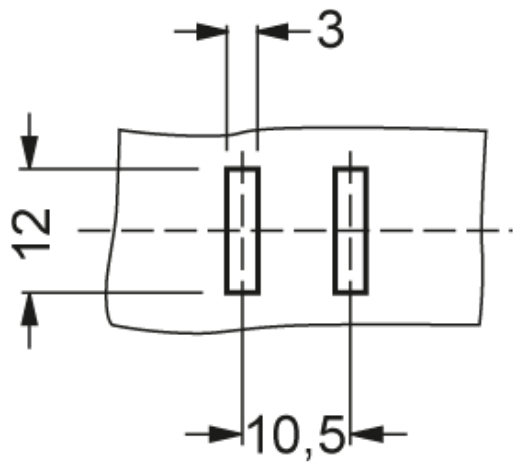

I201\_13761

last modified:

12/19/2020 [↗](#)

