SIEMENS

Data sheet 3KC4338-0CA21-0AA3



SENTRON, transfer switching equipment 3KC, remotely operated, RTSE, 3-pole, Iu: 250 A, Ue AC: 415 V, Ie at AC-33 B at 415 V: 200 A, Ie at AC-23 A at 690 V: 125 A, screw mounting, motorized operating mechanism, at the right end, long handle, busbar connection

Model	
product brand name	SENTRON
product designation	3KC transfer switching equipment
design of the product	remote-controlled
display version for switch position indicator manual operation	I - O - II
design of the actuating element	Long rotary knob
design of handle	Handle
type of the driving mechanism	motorized operating mechanism
type of the driving mechanism motor drive	Yes
General technical data	
number of poles	3
type of device	fixed mounting
mechanical service life (switching cycles) for function sequence O-I-O typical	7 000
I2t value	
● with closed switch at 690 V for combination switch + gG fuse maximum	724 500 A²·s
● of the fuse at 415 V maximum permissible	200 000 A²·s
● of the gG fuse at 690 V maximum permissible	700 000 A²·s
position of the switch operating mechanism	at the right end
overvoltage category	IV
degree of pollution	3
insulation voltage	
● rated value	1 000 V
● with degree of pollution 3 at DC rated value	1 000 V
Supply voltage	
supply voltage at AC	
● minimum	166 V
● maximum	332 V
Protection class	
protection class IP	IP00
protection class IP	
● with closed switch with cover or cable lug cover	IP20
● on the front	IP00
Dissipation	
power loss [W]	
● with conventional rated thermal current per device	17.7 W
operational current	
● at 35 °C rated value	250 A
● at 40 °C rated value	250 A

Subject to change without notice
© Copyright Siemens

● at 50 °C rated value	250 A
● at 60 °C rated value	250 A
● at 70 °C rated value	250 A
● at AC rated value	250 A
● at AC-23 B at 690 V rated value	125 A
● at AC-22 B at 690 V rated value	160 A
● at AC-22 B at 500 V rated value	250 A
● at AC-21 B at 500 V rated value	250 A
● at AC-21 B at 690 V rated value	200 A
● at AC-23 A at 690 V rated value	125 A
● at AC-23 A at 500 V rated value	200 A
● at AC-22 A at 690 V rated value	160 A
● at AC-22 A at 500 V rated value	200 A
● at AC-21 at 500 V rated value	250 A
● at AC-21 at 690 V rated value	200 A
● at AC-21 A at 415 V rated value	250 A
● at AC-21 B at 415 V rated value	250 A
● at AC-22 A at 415 V rated value	250 A
● at AC-22 B at 415 V rated value	250 A
● at AC-23 A at 415 V rated value	200 A
● at AC-23 B at 415 V rated value	200 A
● at AC-31 B at 415 V rated value	250 A
● at AC-32 B at 415 V rated value	200 A
● at AC-33 B at 415 V rated value	200 A
● at AC-33 iB at 415 V rated value	250 A
● at AC at 230 V rated value	0.5 A
● at DC-23 A at 440 V rated value	200 A
● at DC-21 A at 440 V rated value	200 A
● at DC-21 A at 220 V rated value	250 A
● at DC-22 A at 220 V rated value	250 A
● at DC-22 A at 440 V rated value	200 A
operational current of upstream fuse rated value	250 A
operational current at DC rated value	250 A
let-through current of the gG fuse at 690 V maximum permissible	22 000 A
let-through current with closed switch	
● at 690 V for combination switch + gG fuse maximum permissible	25 050 A
Main circuit	
operating frequency rated value	
● minimum	45 Hz
● maximum	65 Hz
operational current rated value	250 A
Auxiliary circuit	
number of connected NC contacts for auxiliary contacts	0
number of connected NO contacts for auxiliary contacts	3
number of connected CO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	4
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
suitability for use	
● main switch	Yes
● switch disconnector	Yes
● EMERGENCY OFF switch	No
● safety switch	No
● maintenance/repair switch	Yes
product extension auxiliary switch	Yes
product extension optional	
● motor drive	No
● voltage trigger	No
Short circuit	
short-circuit current making capacity (Icm) for switch disconnector	
● at 415 V AC without fuse link according to IEC	17 kA

Subject to change without notice
© Copyright Siemens

60947-6-1 rated value minimum	
● at 690 V AC without fuse link according to IEC 60947-3 rated value minimum	22 kA
conditional short-circuit current with line-side fuse protection	
● at 415 V by gG fuse according to IEC 60947-6-1 rated value	50 kA
● at 415 V by gG fuse rated value	50 kA
● at 690 V by gG fuse according to IEC 60947-3 rated value	50 kA
input current at digital input with signal <0> maximum	1 mA
number of digital inputs	5
● design of the switching input	Connected with control terminal
relay design	1 relay: 1NO, 2A 250 VAC or 2A 24 VDC.
pulse duration minimum	0.06 s
input delay time	0.046 s
Connections	
type of connectable conductor cross-sections	
● for copper busbar	1x32x5
type of connectable conductor cross-sections for copper conductor	
● stranded with lug according to DIN 46234	1 x (95…150 mm^2)
type of electrical connection	
● of the inputs and outputs	Removable/insertable
● for main current circuit	busbar connection
Mechanical Design	
height	160 mm
width	328 mm
depth	292 mm
fastening method	screw fixing
fastening method	
● 4-hole front mounting	No
● front mounting with central attachment	No
● rail mounting	No
net weight	6 900 g
Environmental conditions	
ambient temperature during operation	
● minimum	-20 °C
● maximum	70 °C
ambient temperature during storage	
● minimum	-40 °C
● maximum	70 °C

General Product Approval					**Declaration of Conformity**
CCC	CCC	Confirmation	Miscellaneous	EAC	UKCA

Declaration of Conformity	**other**
CE EG-Konf.	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)

Subject to change without notice
© Copyright Siemens

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3KC4338-0CA21-0AA3

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3KC4338-0CA21-0AA3

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KC4338-0CA21-0AA3


CAx-Online-Generator


http://www.siemens.com/cax

Tender specifications


http://www.siemens.com/specifications

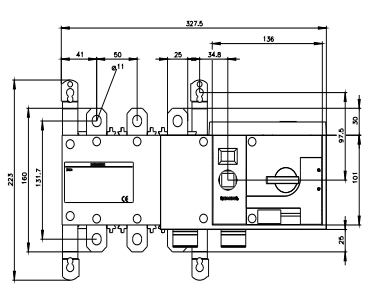





Subject to change without notice
© Copyright Siemens

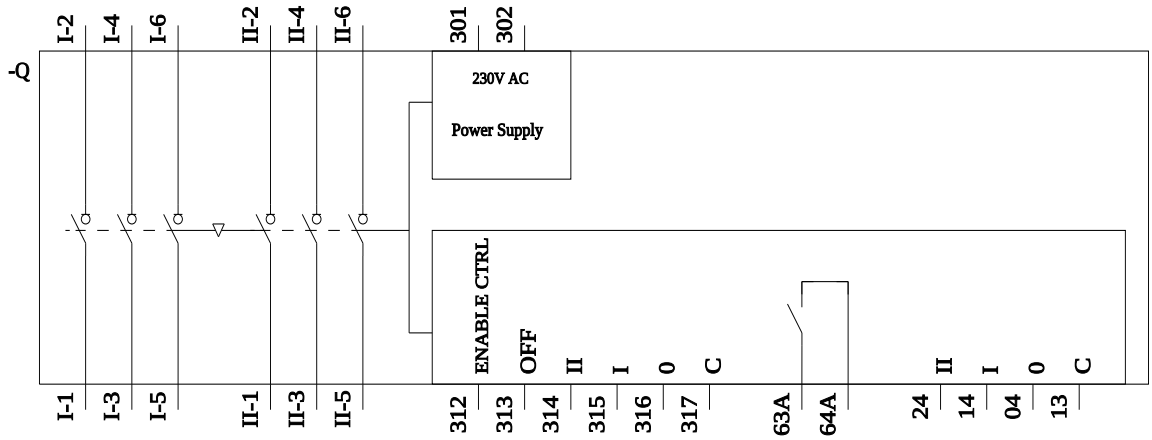

Subject to change without notice
© Copyright Siemens

Subject to change without notice
© Copyright Siemens