



Contactor relay, 44E, DIN EN 50011, for railway applications 7 NO + 1 NC, screw terminal connected to varistor 110 V DC Operating range 0.7...1.25xUS

product designation	Auxiliary contactor
product type designation	3TH4
size of contactor	0
reference code according to IEC 81346-2	K
Substance Prohibitation (Date)	03/01/2017
ambient temperature during operation	-40 ... +70 °C
type of voltage of the control supply voltage	DC
control supply voltage at DC	
• rated value	110 V
design of the surge suppressor	with varistor
number of NC contacts for auxiliary contacts	1
• delayed switching	0
• lagging switching	0
• make-before-break switching	0
number of NO contacts for auxiliary contacts	7
• delayed switching	0
• leading contact	0
• make-before-break switching	0
number of CO contacts for auxiliary contacts	0
identification number and letter for switching elements	71 E
operational current at AC-15	
• at 230 V rated value	10 A
• at 400 V rated value	6 A
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
height	78 mm
width	45 mm
depth	135 mm
type of electrical connection for auxiliary and control circuit	screw-type terminals
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x Ie
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP00

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH4271-0LF4>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH4271-0LF4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4271-0LF4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4271-0LF4&lang=en

Characteristic: Tripping characteristics, I_t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4271-0LF4/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TH4271-0LF4&objecttype=14&gridview=view1>

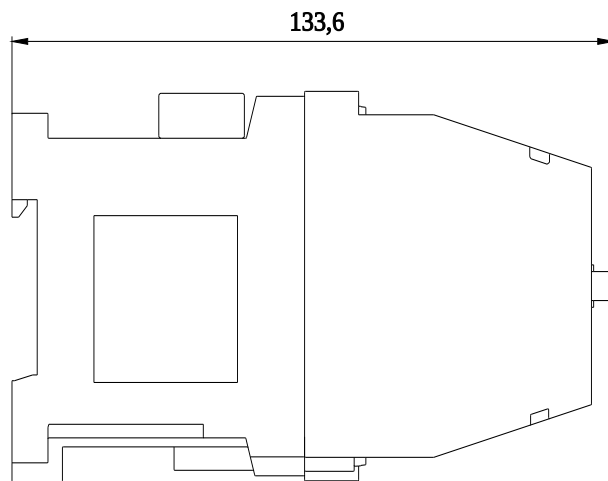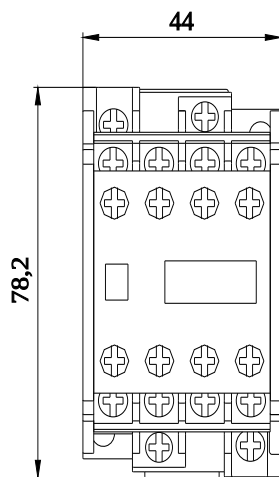

last modified:

12/23/2020 