SIEMENS

Data sheet LZS:PT5D5S15



Plug-in relay complete unit 4 W, 115 V AC LED module red Socket with logic isolation Spring-type terminal (push-in)

product brand name	SIRIUS
product designation	Coupling relay with plug-in relay
product type designation	LZS
General technical data	
display version LED	Yes
percental drop-out voltage related to the input voltage	30 %
protection class IP	IP20
operating frequency without load	36 000 1/h
operating frequency with load	360 1/h
switching behavior	monostable
design of the switching function	changeover switch
design of the switching function positively driven	No
mechanical service life (operating cycles) typical	20 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	250 000
thermal current	6 A
reference code according to IEC 81346-2	K
Control circuit/ Control	
control supply voltage at AC	
● at 50 Hz rated value	115 V
● at 60 Hz rated value	115 V
control supply voltage frequency	
● 1 rated value	50 Hz
● 2 rated value	60 Hz
supply voltage frequency for auxiliary and control circuit rated value	50 ... 60 Hz
operating range factor control supply voltage rated value at AC at 50 Hz	
● initial value	0.9
● full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
● initial value	0.9
● full-scale value	1.1
design of the relay operating mechanism	poled
product component plug-in socket	Yes
design of the snap-on socket base	Socket with logic isolation
Short-circuit protection	
design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gG: 6 A
Auxiliary circuit	
type of switching contact	Changeover contact

Subject to change without notice
© Copyright Siemens

material of switching contacts	AgNi 90/10
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	4
operational current of auxiliary contacts at AC-15	
● at 250 V	2 A
operational current at DC-13 at 24 V rated value	4 A
operational current of auxiliary contacts at DC-13	
● at 24 V	4 A
Main circuit	
type of voltage	AC
ampacity of the output relay at DC-13	
● at 24 V	4 A
Display	
display version as status display by LED	LED red
Connections/ Terminals	
product function removable terminal	No
type of electrical connection	spring-loaded terminals
type of connectable conductor cross-sections	
● solid	1x (0,75 ... 1,5), 2x (0,75 ... 1,0), 2x 1,5
● finely stranded with core end processing	1x (0,75 ... 1,5), 2x 0,75
● finely stranded without core end processing	1x (0,75 ... 1,5), 2x (0,75 ... 1,0), 2x 1,5
● for AWG cables solid	1x (18 ... 16), 2x (18 ... 16)
● for AWG cables stranded	1x (18 ... 16), 2x (18 ... 16)
connectable conductor cross-section	
● solid	0.75 ... 1.5 mm²
● finely stranded with core end processing	0.75 ... 1.5 mm²
● finely stranded without core end processing	0.75 ... 1.5 mm²
AWG number as coded connectable conductor cross section	
● solid	18 ... 16
● stranded	18 ... 16
Installation/ mounting/ dimensions	
mounting position	any
fastening method	snap-on mounting
height	98 mm
width	28 mm
depth	79 mm
Ambient conditions	
ambient temperature	
● during operation	-40 ... +70 °C
● during storage	-25 ... +70 °C
● during transport	-25 ... +70 °C

Certificates/ approvals


General Product Approval	Declaration of Conformity	other
Confirmation		Confirmation

Further information


Siemens has decided to exit the Russian market (see here).
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business
Siemens is working on the renewal of the current EAC certificates.
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).
Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=LZS:PT5D5S15

Subject to change without notice
© Copyright Siemens

Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=LZS:PT5D5S15
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT5D5S15
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=LZS:PT5D5S15&lang=en
Characteristic: Derating
https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT5D5S15/manual

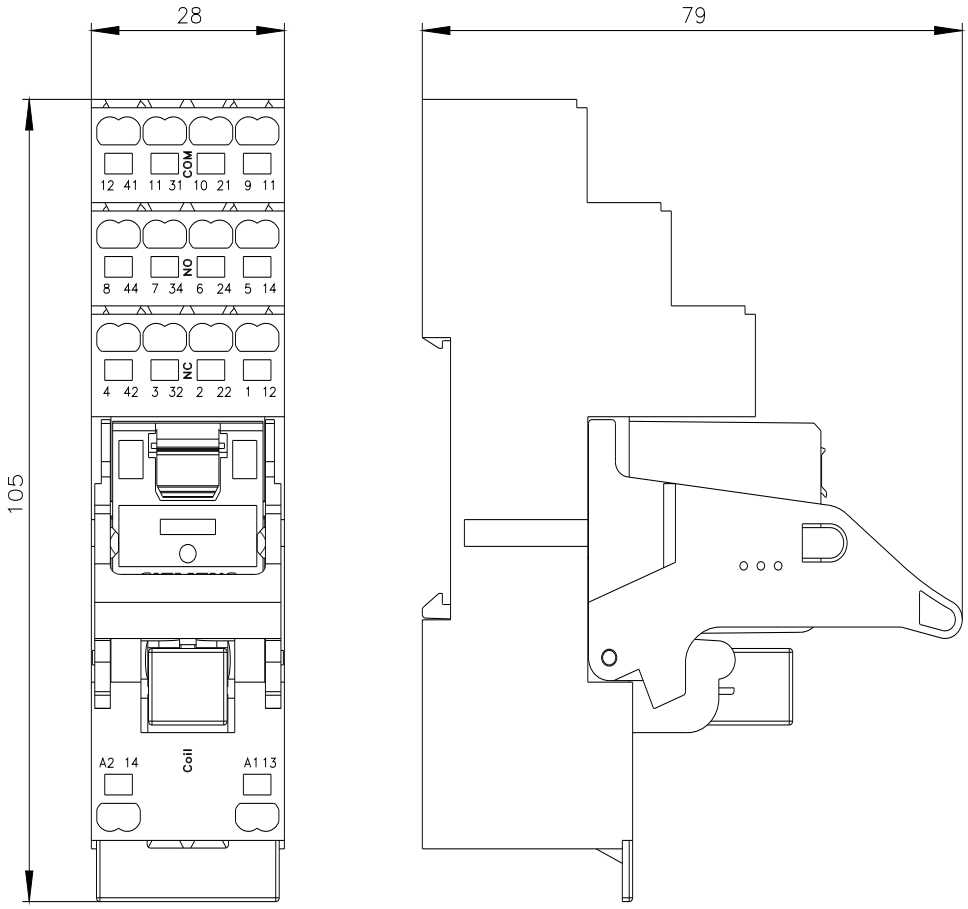

Subject to change without notice
© Copyright Siemens

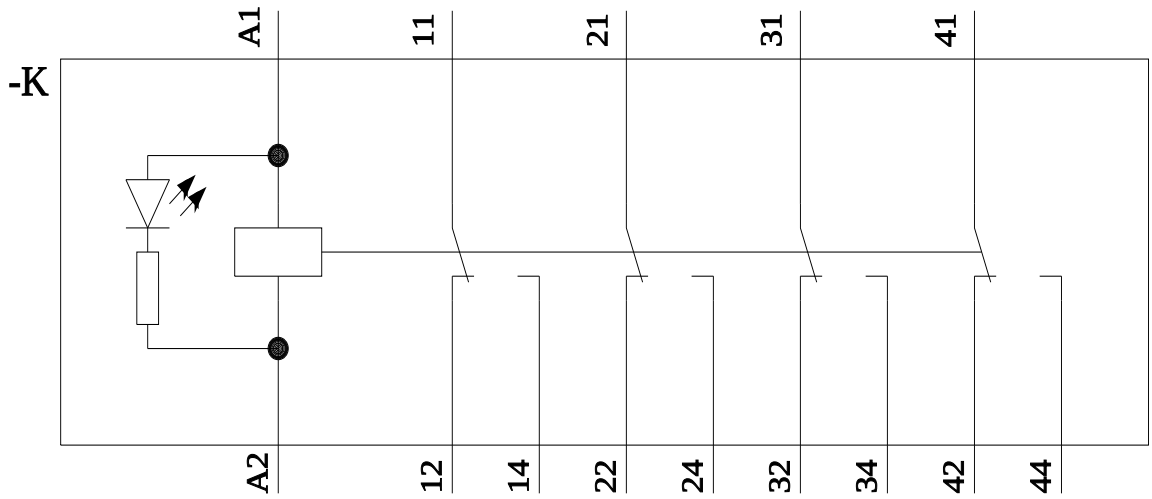

last modified: 10/13/2021

Subject to change without notice
© Copyright Siemens