SIEMENS

Data sheet 3RP2505-2CW30



Timing relay, Multifunction 1 NO semiconductor 13 functions 7 time ranges (0.05 s...100 h) 12-240 V AC/DC at 50/60 Hz AC with LED, Spring-type terminal (push-in)

product brand name	SIRIUS
product designation	timing relay
design of the product	13 functions
product type designation	3RP25
General technical data	
product component	
● relay output	No
● semi-conductor output	Yes
product extension required remote control	No
product extension optional remote control	No
power loss [W] maximum	2 W
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
test voltage for isolation test	2.5 kV
degree of pollution	3
surge voltage resistance rated value	4 000 V
protection class IP	IP20
shock resistance according to IEC 60068-2-27	11g / 15 ms
mechanical service life (operating cycles) typical	10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V typical	300 000
adjustable time	0.05 s ... 100 h
relative setting accuracy relating to full-scale value	5 %; +/-
thermal current	1 A
minimum ON period	35 ms
recovery time	400 ms
reference code according to IEC 81346-2	K
relative repeat accuracy	1 %; +/-
influence of the surrounding temperature	1% in the whole temperature range to the set runtime
power supply influence	1% in the whole voltage range to the set runtime
Substance Prohibitance (Date)	09/12/2014
SVHC substance name	Blei - 7439-92-1 Bleimonoxid (Bleioxid) - 1317-36-8
Control circuit/ Control	
type of voltage of the control supply voltage	AC/DC
control supply voltage 1 at AC	
● at 50 Hz	12 ... 240 V
● at 60 Hz	12 ... 240 V
control supply voltage frequency 1	50 ... 60 Hz
control supply voltage 1	
● at DC	12 ... 240 V

Subject to change without notice
© Copyright Siemens

operating range factor control supply voltage rated value at DC	
● initial value	0.8
● full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
● initial value	0.8
● full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
● initial value	0.8
● full-scale value	1.1
inrush current peak	
● at 24 V	0.5 A
● at 240 V	5 A
duration of inrush current peak	
● at 24 V	0.4 ms
● at 240 V	0.5 ms
Switching Function	
switching function	
● ON-delay	Yes
● ON-delay/instantaneous contact	No
● passing make contact	Yes
● passing make contact/instantaneous contact	No
● OFF delay	No
switching function	
● flashing symmetrically with interval start/instantaneous	No
● flashing symmetrically with interval start	Yes
● flashing symmetrically with pulse start/instantaneous	No
● flashing symmetrically with pulse start	Yes
● flashing asymmetrically with interval start	No
● flashing asymmetrically with pulse start	No
switching function	
● star-delta circuit with delay time	No
● star-delta circuit	No
switching function with control signal	
● additive ON-delay	Yes
● passing break contact	Yes
● passing break contact/instantaneous	No
● OFF delay	Yes
● OFF delay/instantaneous	No
● pulse delayed	Yes
● pulse delayed/instantaneous	No
● pulse-shaping	Yes
● pulse-shaping/instantaneous	No
● additive ON-delay/instantaneous	No
● ON-delay/OFF-delay/instantaneous	No
● passing make contact	Yes
● passing make contact/instantaneous contact	No
switching function of interval relay with control signal	
● retrotriggerable with deactivated control signal/instantaneous contact	No
● retrotriggerable with switched-on control signal	Yes
● retrotriggerable with switched-on control signal/instantaneous contact	No
● retriggerable with deactivated control signal	Yes
design of the control terminal non-floating	Yes
Short-circuit protection	
design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gL/gG: 4 A
Auxiliary circuit	
number of NC contacts	

© Copyright Siemens

● delayed switching	0
● instantaneous contact	0
number of NO contacts	
● delayed switching	1
● instantaneous contact	0
number of CO contacts	
● delayed switching	0
● instantaneous contact	0
operational current of auxiliary contacts at AC-15	
● at 24 V	1 A
● at 250 V	1 A
operational current of auxiliary contacts at DC-12	
● at 24 V	1 A
● at 125 V	1 A
● at 250 V	1 A
operating frequency with 3RT2 contactor maximum	5 000 1/h
switching capacity current with inductive load	0.01 ... 1 A
Inputs/ Outputs	
product function	
● at the relay outputs switchover delayed/without delay	No
● non-volatile	No
residual current maximum	0.5 mA
Electromagnetic compatibility	
EMC emitted interference according to IEC 61812-1	ambience A (industrial sector)
EMC immunity according to IEC 61812-1	corresponds to degree of severity 3
conducted interference	
● due to burst according to IEC 61000-4-4	2 kV network connection / 1 kV control connection
● due to conductor-earth surge according to IEC 61000-4-5	2 kV
● due to conductor-conductor surge according to IEC 61000-4-5	1 kV
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge
Safety related data	
category according to EN 954-1	none
protection class IP on the front according to IEC 60529	IP20
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection for auxiliary and control circuit	spring-loaded terminals (push-in)
type of connectable conductor cross-sections	
● solid	0.5 ... 4 mm²
● finely stranded with core end processing	0.5 ... 2.5 mm²
● finely stranded without core end processing	0.5 ... 4 mm²
● for AWG cables solid	20 ... 12
● for AWG cables stranded	20 ... 12
connectable conductor cross-section	
● solid	0.5 ... 4 mm²
● finely stranded with core end processing	0.5 ... 2.5 mm²
● finely stranded without core end processing	0.5 ... 4 mm²
AWG number as coded connectable conductor cross section	
● solid	20 ... 12
● stranded	20 ... 12
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	100 mm
width	17.5 mm
depth	90 mm
required spacing	
● with side-by-side mounting	

Subject to change without notice
© Copyright Siemens

— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
● for grounded parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
● for live parts	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
● during operation	-25 ... +60 °C
● during storage	-40 ... +85 °C
● during transport	-40 ... +85 °C
relative humidity during operation	10 ... 95 %

Approvals Certificates

General Product Approval

Confirmation

EMV

Test Certificates

Type Test Certific-ates/Test Report

Marine / Shipping

Marine / Shipping

other


Confirmation


Further information

Siemens has decided to exit the Russian market (see here).
https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business
Siemens is working on the renewal of the current EAC certificates.
Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).
Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2505-2CW30
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2505-2CW30
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-2CW30
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2505-2CW30&lang=en

© Copyright Siemens

Characteristic: Derating
https://support.industry.siemens.com/cs/ww/en/ps/3RP2505-2CW30/manual

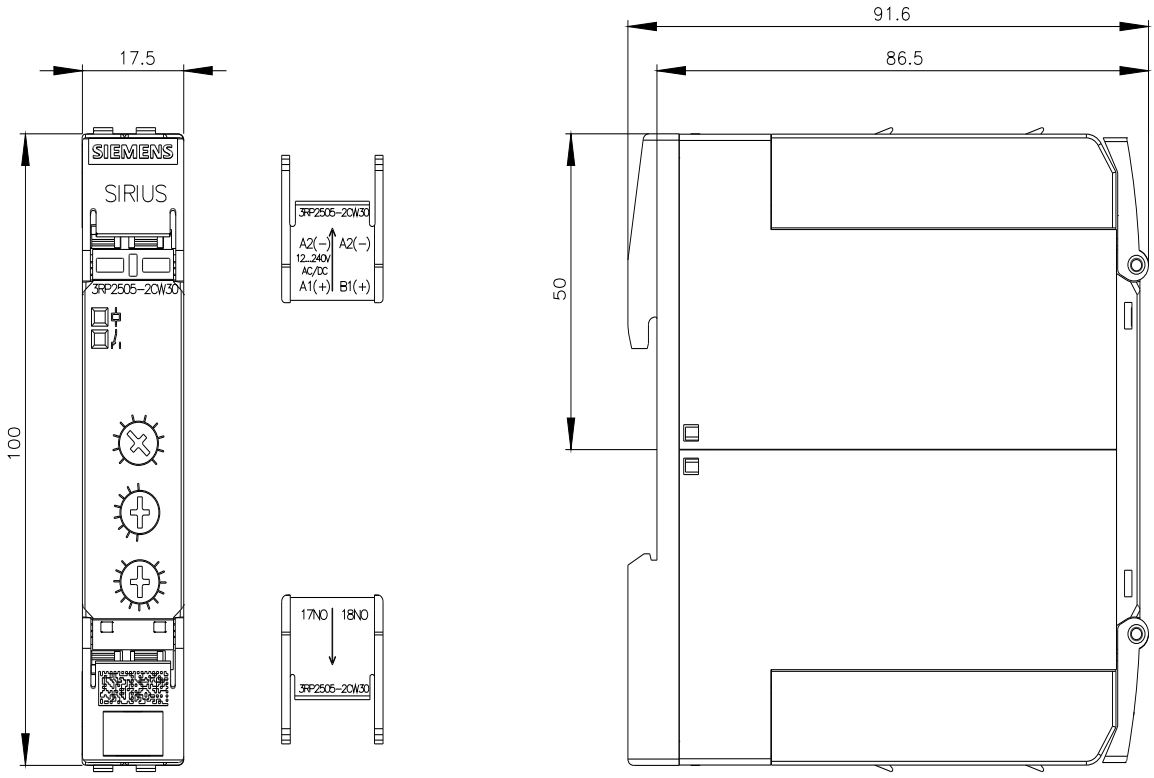

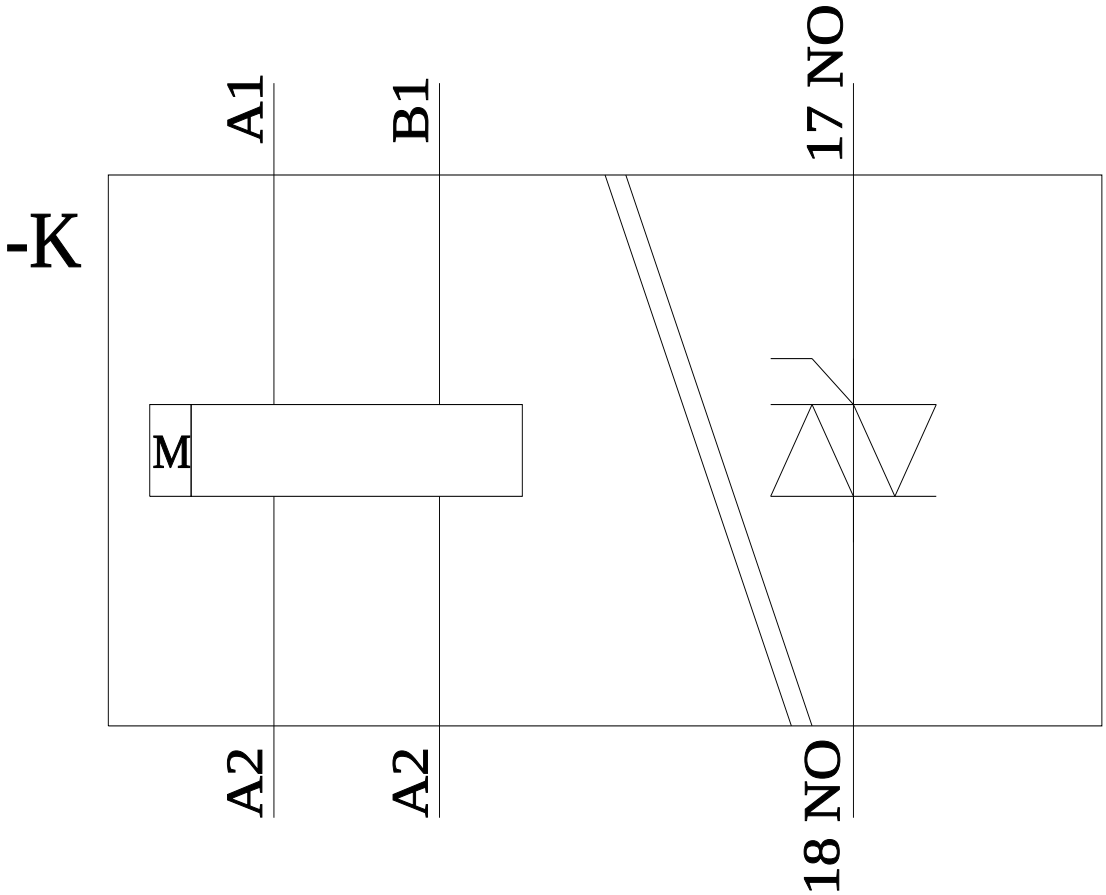

Subject to change without notice
© Copyright Siemens

last modified:	8/7/2023

Subject to change without notice
© Copyright Siemens