



Shield terminal, for direct shield attachment on conductive mounting plates, diameter 3-14 mm

terminal contact spacing	17 mm
Connections	
connectable cable cross-section	
• minimum	3 mm
• maximum	14 mm
type of electrical connection	screw-type terminals
Mechanical Design	
height	57.8 mm
fastening method	direct assembly
Approvals Certificates	
General Product Approval	other



[Confirmation](#)



[Confirmation](#)

[Miscellaneous](#)

Further information
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business
Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).
Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WH9130-0BA00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/8WH9130-0BA00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH9130-0BA00
CAX-Online-Generator http://www.siemens.com/cax
Tender specifications http://www.siemens.com/specifications

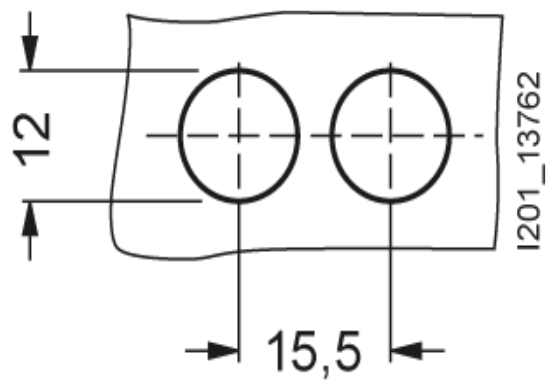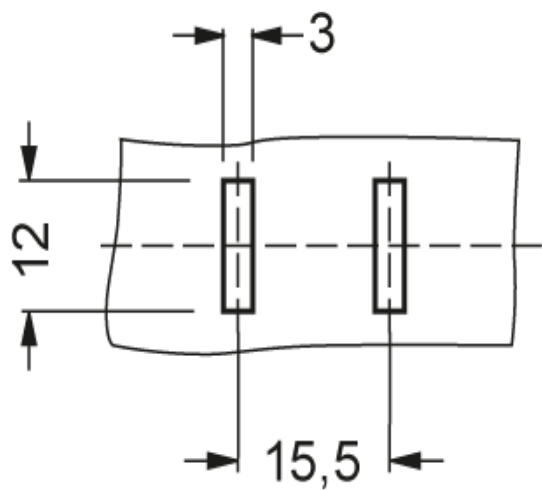

last modified:

12/19/2020 

