

Product End of Life Instructions


OKKEN 115/70-2 MCC Low Voltage Switchboard



Marketing Model

The End of Life Instruction (EOLI) covers the entire range of Okken low voltage switchboard starting from 630A to 3200A. The switchboards configuration can be different depending on the customer's needs. But some products inside are recommended to be treated separately. They are listed below.

End of Life Instructions

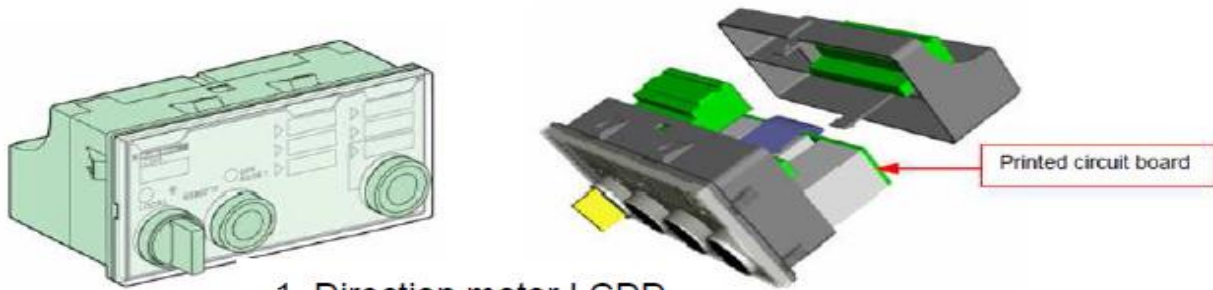

1. Direction motor LCDD

88400 & 88401




2. Neon light

87718




3. Intelligent motor protection relay

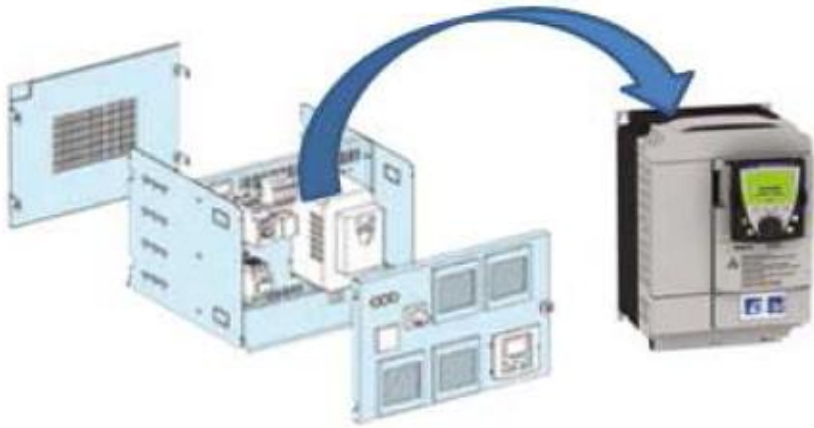


4. Drives
Soft starters &
Variable speed drives

5. INSULATED SUPPORT FOR BAR 40 X 5

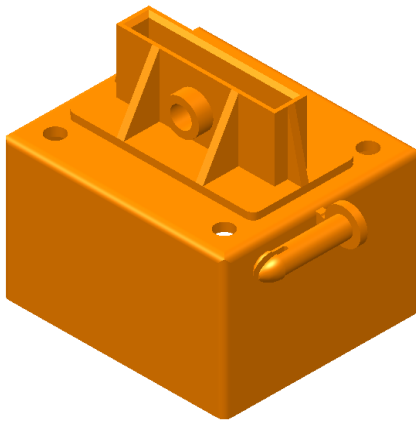


Used in CR: 87266

6. INSULATED SUPPORT FOR BAR 20 X 5

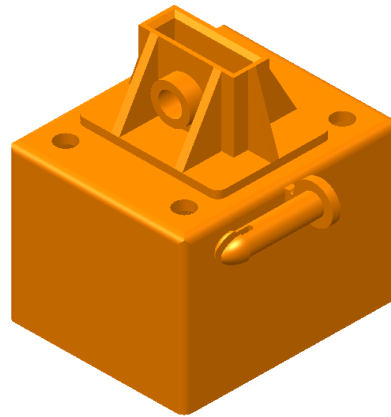


Used in the following CR's:
87372, 87469 & 87626.

7. ACTUATOR SEPARATOR NS630

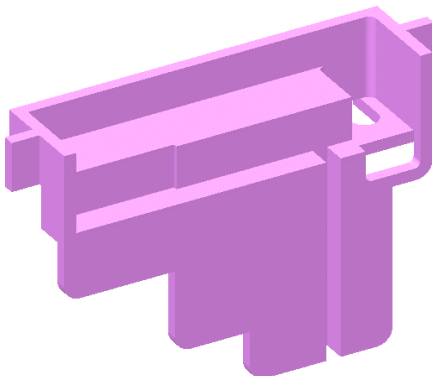


Used in CR: 87359

8. ACTUATOR SEPARATOR NS250

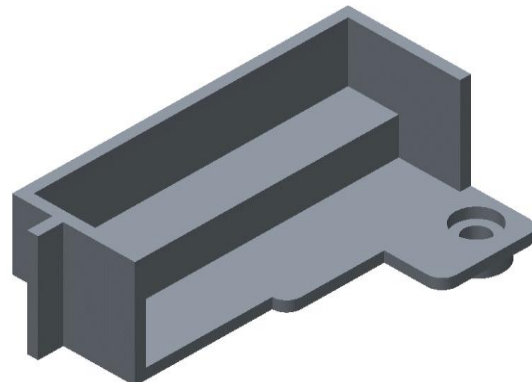


Used in CR: 87387

9. CHILL FOR 1 BLOCK UPSTREAM

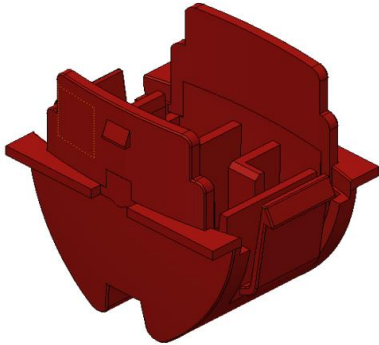


Used in the following CR's:
87365, 87468, 87625 & 87851

10. CHILL FOR 3 BLOCKS UPSTREAM

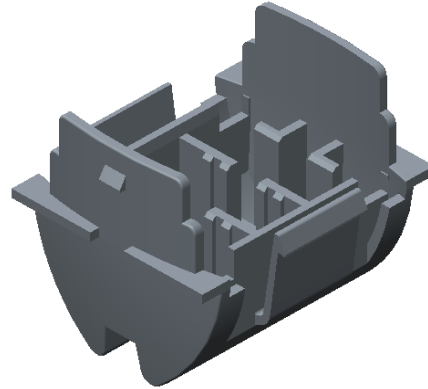


Used in CR: 87367

11. CHILL FOR 1 BLOCK DOWNSTREAM

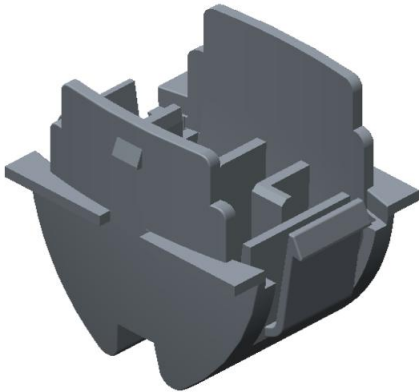


Used in CR: 87369

12. CHILL FOR 3 BLOCKS DOWNSTREAM

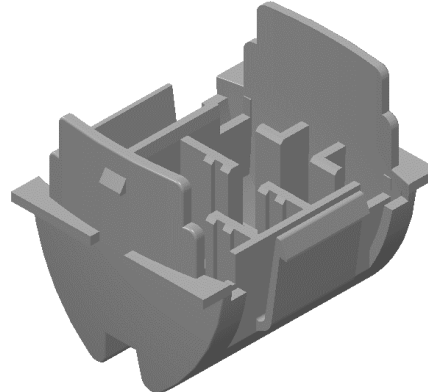


Used in CR: 87371

13. CLIP FOR 1 BOCK

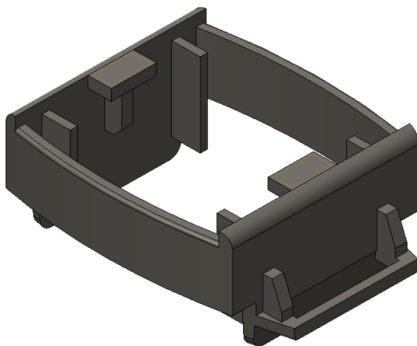


Used in the following CR's:
87365, 87369, 87468, 87625 & 87851

14. CLIP FOR 3 BOCK

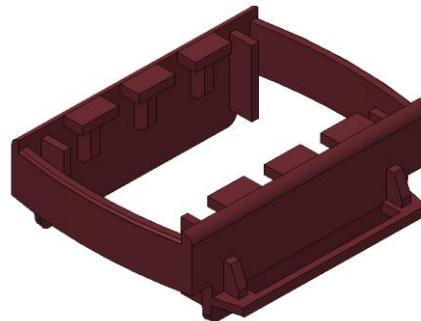


Used in the following CR's:
87367 & 87371

15. CONTROL BUTTON INDEX/LOCKING

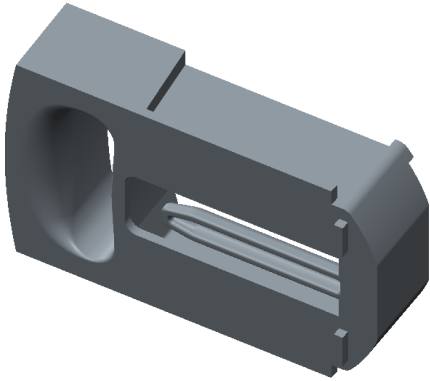


Used in CR - 87400

16. CONTROL BUTTON INDEX/LOCKING

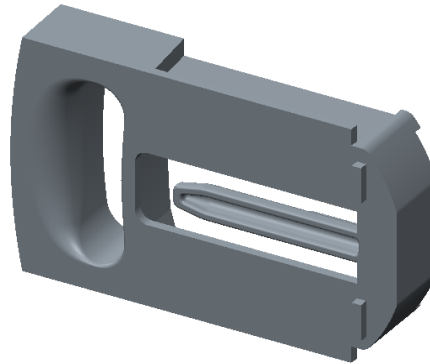


Used in the following CR's:
87469 & 87626

17. SLIDING GUIDE

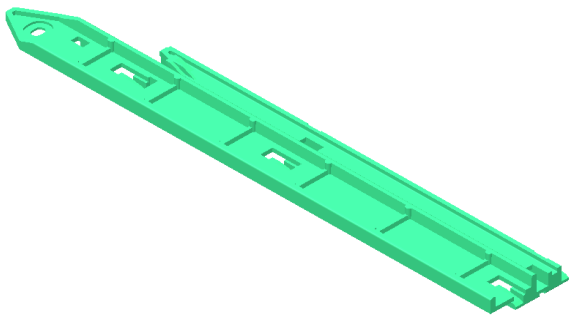


Used in CR - 87430

18. BOX CONNECTOR

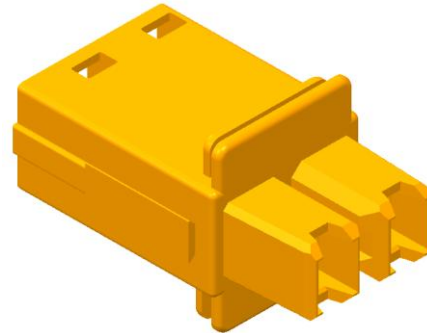


Used in the following CR's:
87468 & 87625

19. PAD SUPPORT CONNECTOR

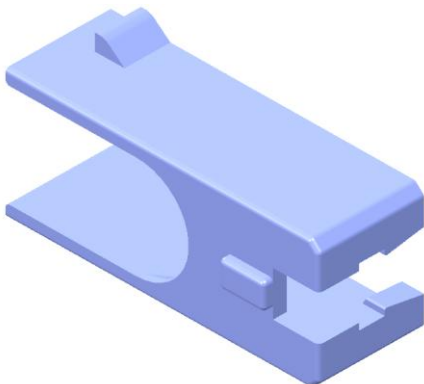


Used in the following CR's:
87468 & 87625


20. SUPPORT PRISES ARRIERES

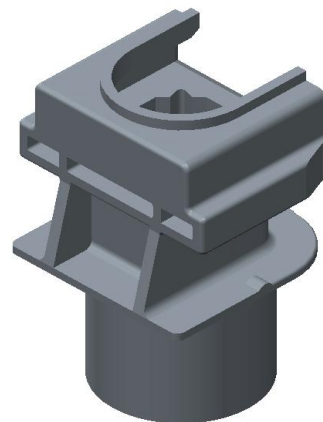

Used in CR: 87387

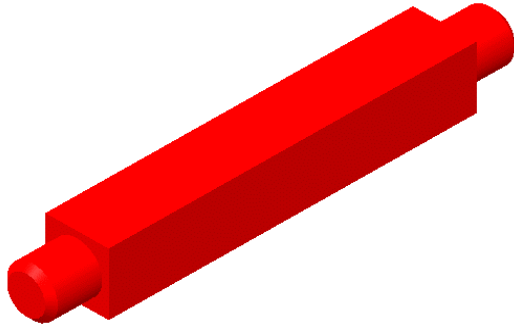21. POSITION SQUARE

**Used in the following CR's:
87630, 87788 & 87791**

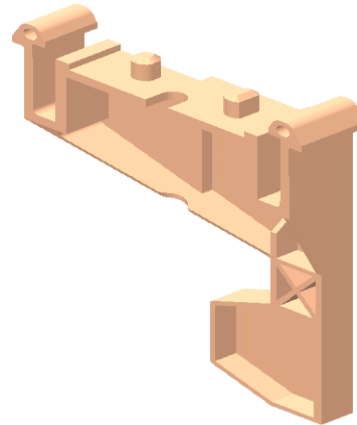22. NS630 ACTIONER

Used in CR: 87780

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Direction motor LCDD		Contains a PCB. CR changes for different configurations
To be depolluted	2	Neon light		Contains a PCB.
To be depolluted	3	Intelligent motor protection relays	250	Contains a PCB & LCD. CR changes for different configurations
To be depolluted	4	Soft starters & Variable speed drives		Contains a PCB & LCD. CR changes for different configurations
To be depolluted	5	INSULATED SUPPORT FOR BAR 40 X 5	195,41	Polybutylene Terephthalate (PBT) with Brominated Flame Retardant (FR -Antimony(III) oxide (Sb ₂ O ₃))
To be depolluted	6	INSULATED SUPPORT FOR BAR 20 X 5	345,17	
To be depolluted	7	ACTUATOR SEPARATOR NS630	4,96	
To be depolluted	8	ACTUATOR SEPARATOR NS250	4,89	
To be depolluted	9	CHILL FOR 1 BLOCK UPSTREAM	324,98	
To be depolluted	10	CHILL FOR 3 BLOCKS UPSTREAM	130,58	
To be depolluted	11	CHILL FOR 1 BLOCK DOWNSTREAM	92,91	
To be depolluted	12	CHILL FOR 3 BLOCK DOWNSTREAM	130,64	
To be depolluted	13	CLIP FOR 1 BOCK	131,01	
To be depolluted	14	CLIP FOR 3 BOCK	84,14	
To be depolluted	15	CONTROL BUTTON INDEX/LOCKING	13,39	
To be depolluted	16	CONTROL BUTTON INDEX/LOCKING	22,03	
To be depolluted	17	SLIDDING GUIDE	44	
To be depolluted	18	BOX CONNECTOR	92,25	
To be depolluted	19	PAD SUPPORT CONNECTOR	15,45	
To be depolluted	20	SUPPORT PRISES ARRIERES	25,86	
To be depolluted	21	POSITION SQUARE	1,43	
To be depolluted	22	NS630 ACTIONER	230,16	



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	Okken is an assembled enclosures with busbars. It is designed to integrate and allow the installation of electric devices such as Circuit breakers (MCCB & MCB), Switch disconnectors, Fuse, Busbars for connection as per the customer requirement for a maximum current value of up to 3200A.
Product reference	87020
Total representative product mass in Grams	1240000
Representative product dimensions	2350mm x 2200mm x 600mm
Accessories	Okken low voltage switchboard also contains other Schneider Electric products sold separately. In order to find their End of Life Instructions, please refer to Schneider Electric website.
Date of information release	02/2017



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	85%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

Published by Schneider Electric

ENVEOLI121212EN

© 2016 - Schneider Electric – All rights reserved

02/2017