
PERFORMANCE
iN LIGHTING

ART.: 8220391153330


WL220 OPAL



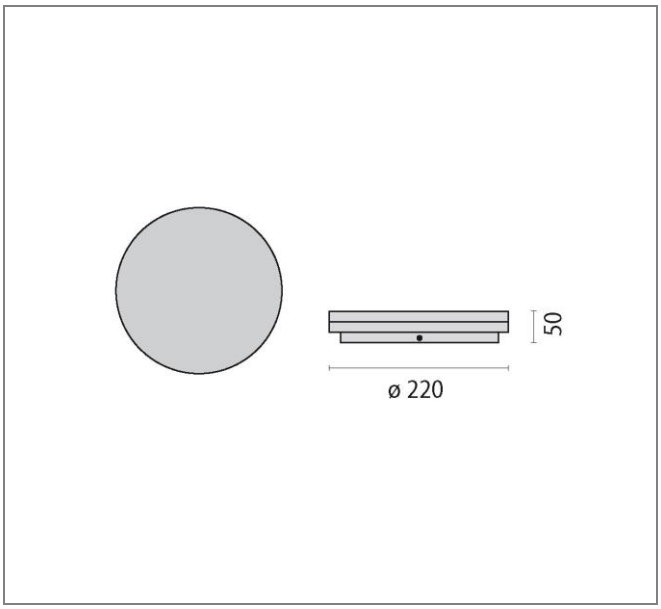

Art.: 8220391153330, WL ROUND, Opal-white pmma diffuser, 17W, 3000K, Driver static, Direct, No, Wall and ceiling mounted LED luminaire for indoors, comprising: technopolymer housing, Light orienting technopolymer optic for a homogenous light distribution over the entire area of the cover, Direct light distribution, Colour rendering index Ra > 80, Colour tolerance according to MacAdam ≤ 3 SDCM Complete with electric converter

Connected load	17 W
Luminous flux	1290 lm
Efficiency	76 lm/W
Colour temperature	3000K
Colour rendering (CRI)	80
IP class	20
Nominal voltage	220 – 240 V
Colour	0
UGR	20,1

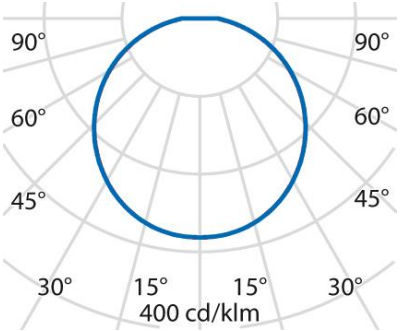

Performance in Lighting GmbH | Stapelner Str. 1 + 3 | 38644 Goslar | Germany | Tel. +49 (0) 5321 / 37 77-0 | Fax +49 (0) 53 21 / 37 77-99
info.de@pil.lighting | www.light-performer.com | www.performanceinlighting.com