


PHILIPS

LUXSPACE

DN570B/571B

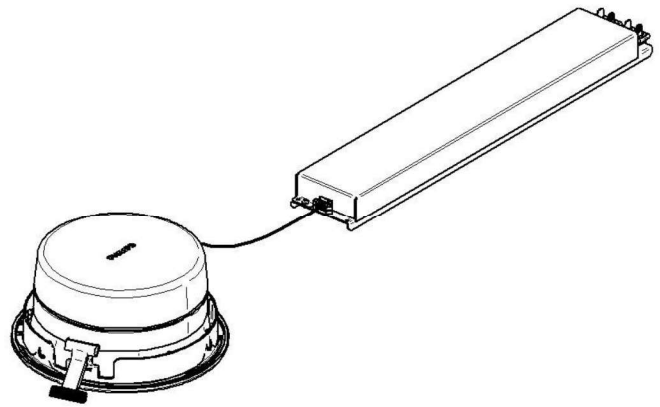

IP20

50Hz
60Hz230V
240VGLOW
WIRE
850 °C





DN570B/DN571B

LED40S




TWH


1.93


Product information

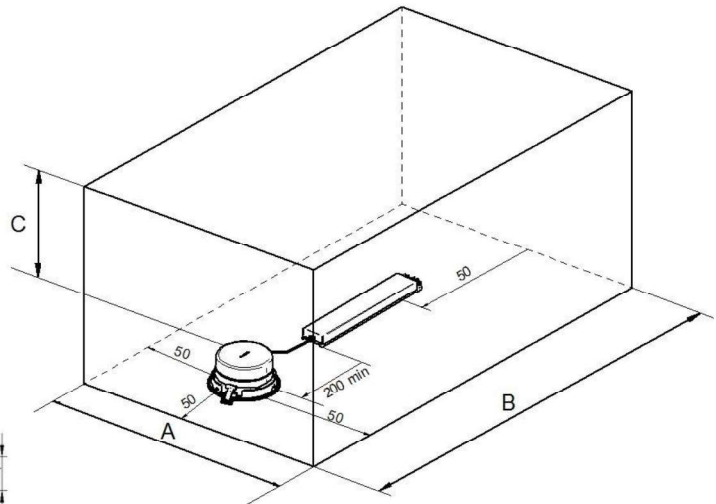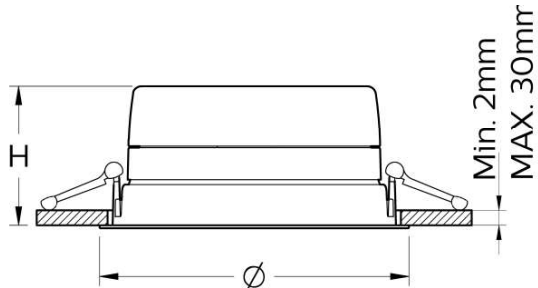


	H	 Ø mm	Ø
DN570B	96,5 mm	200 mm	214 mm
DN571B	119 mm	200 mm	214 mm



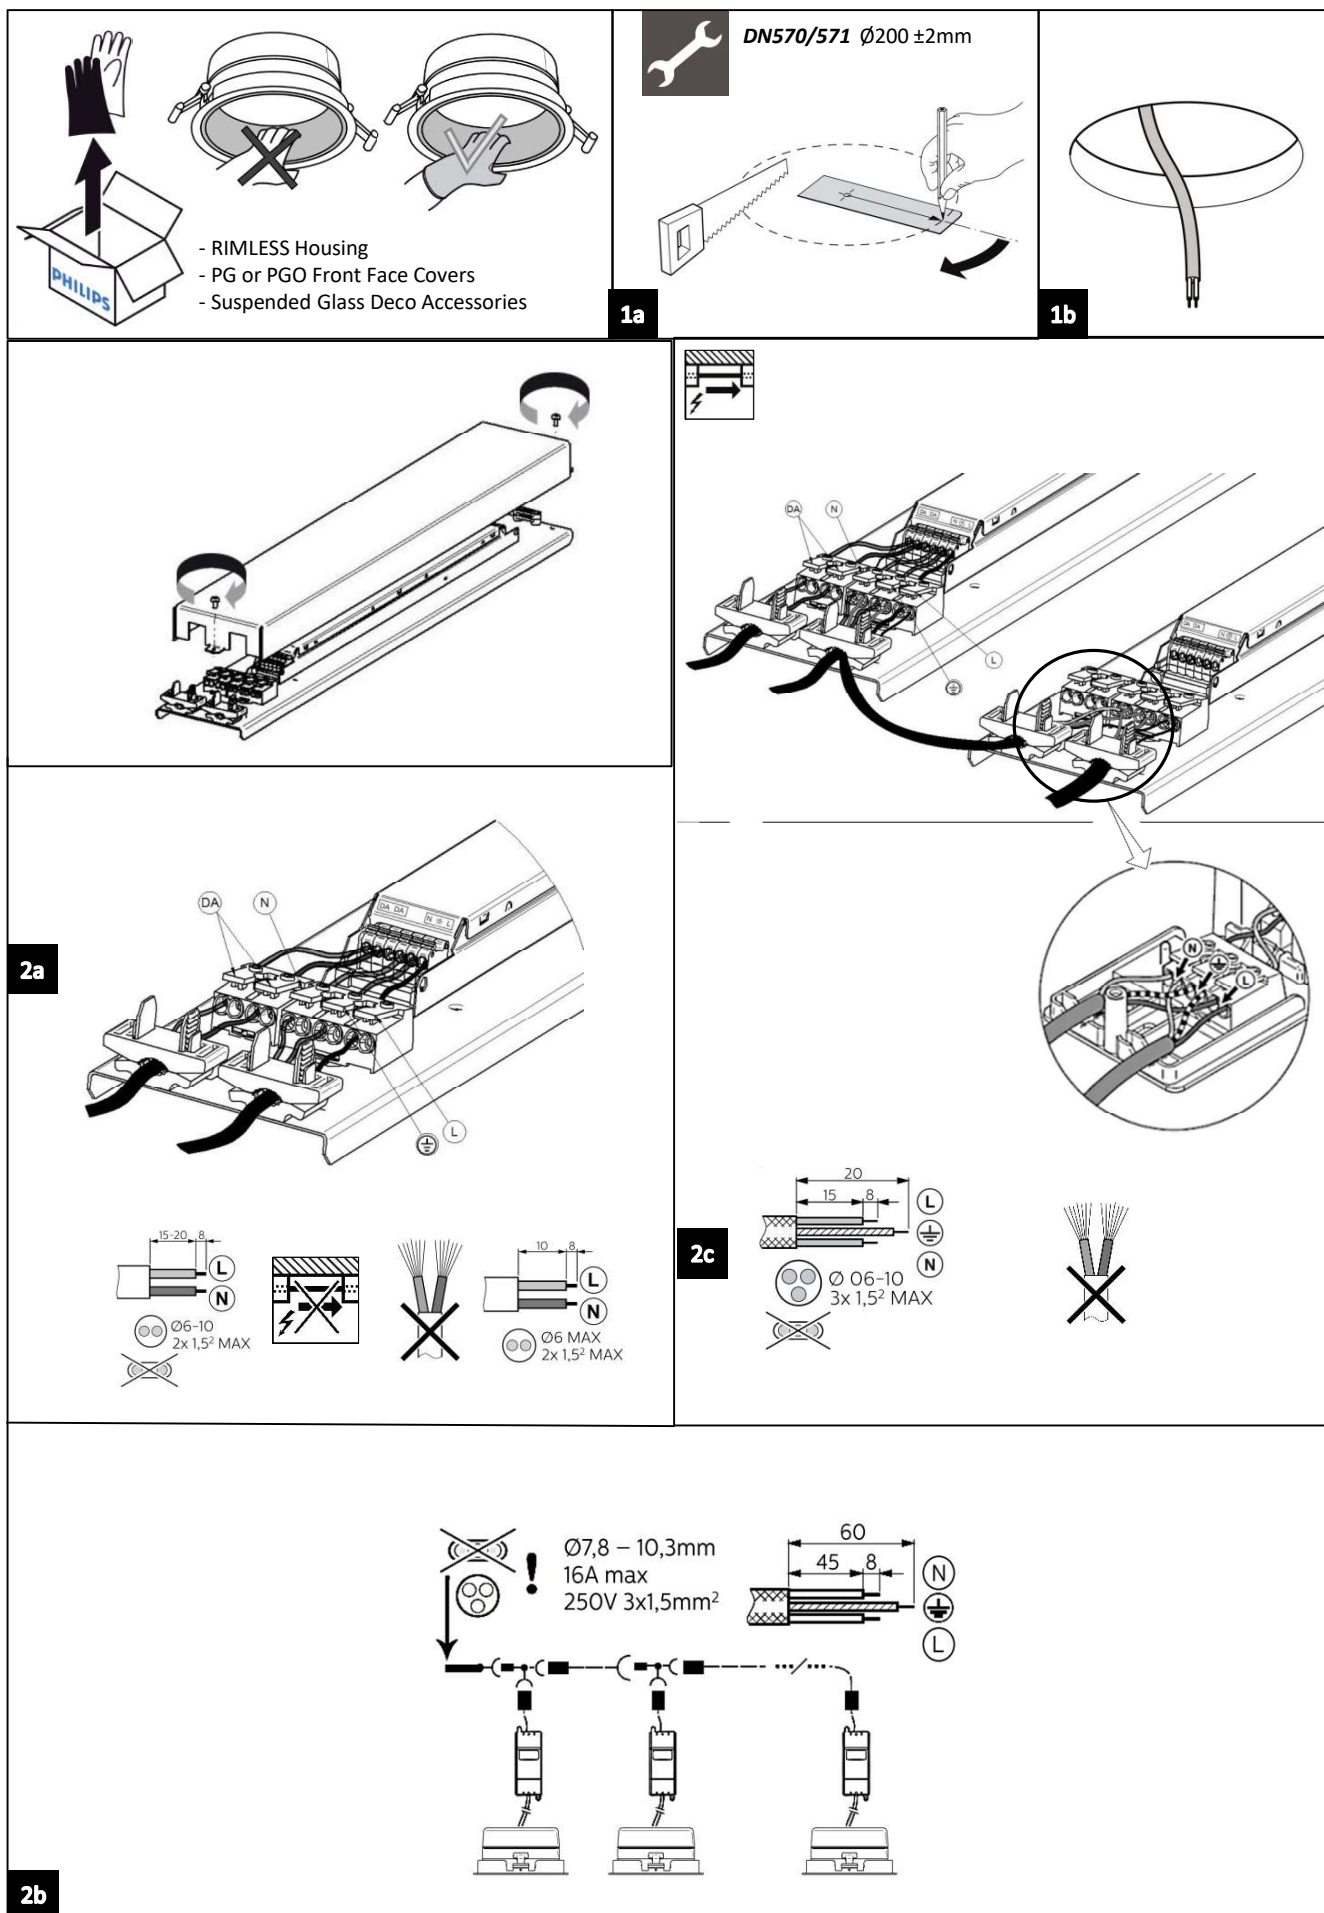

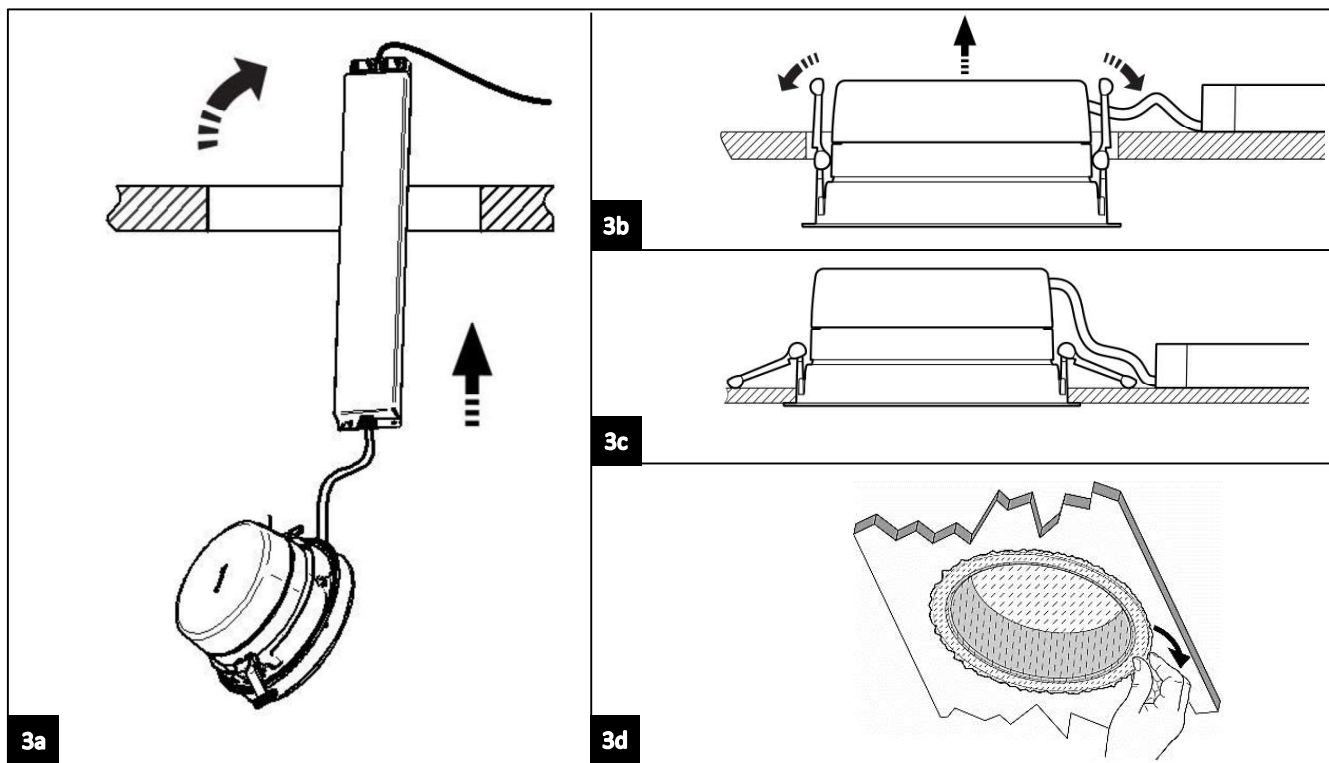


DALI dimming
range 1-100%

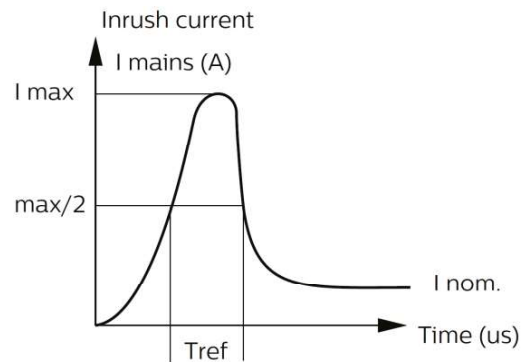


Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation $\varnothing$	15 mm ²	15 mm ²	25 mm ²	4 mm ²	15 mm ²	15 mm ²	25 mm ²	4 mm ²	I_{max}	time
LCA 100W 350-1050mA 2xDT8 lp PRE	10	13	16	21	6	8	10	13	39 A	286 μs


RIMLESS Version






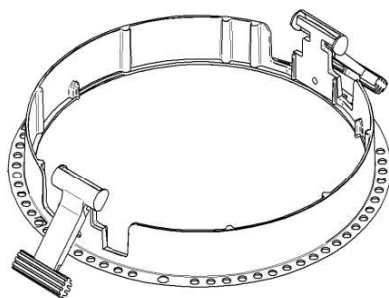


RIM Accessory

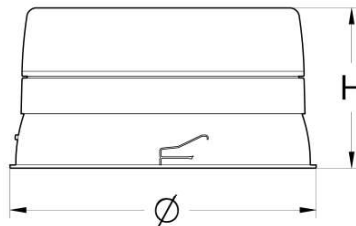

	H	$\varnothing$
DN 570 B	98,5 mm	189 mm
DN 57 B	121 mm	189 mm

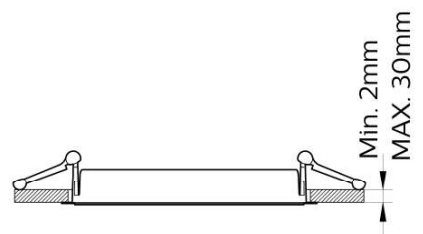

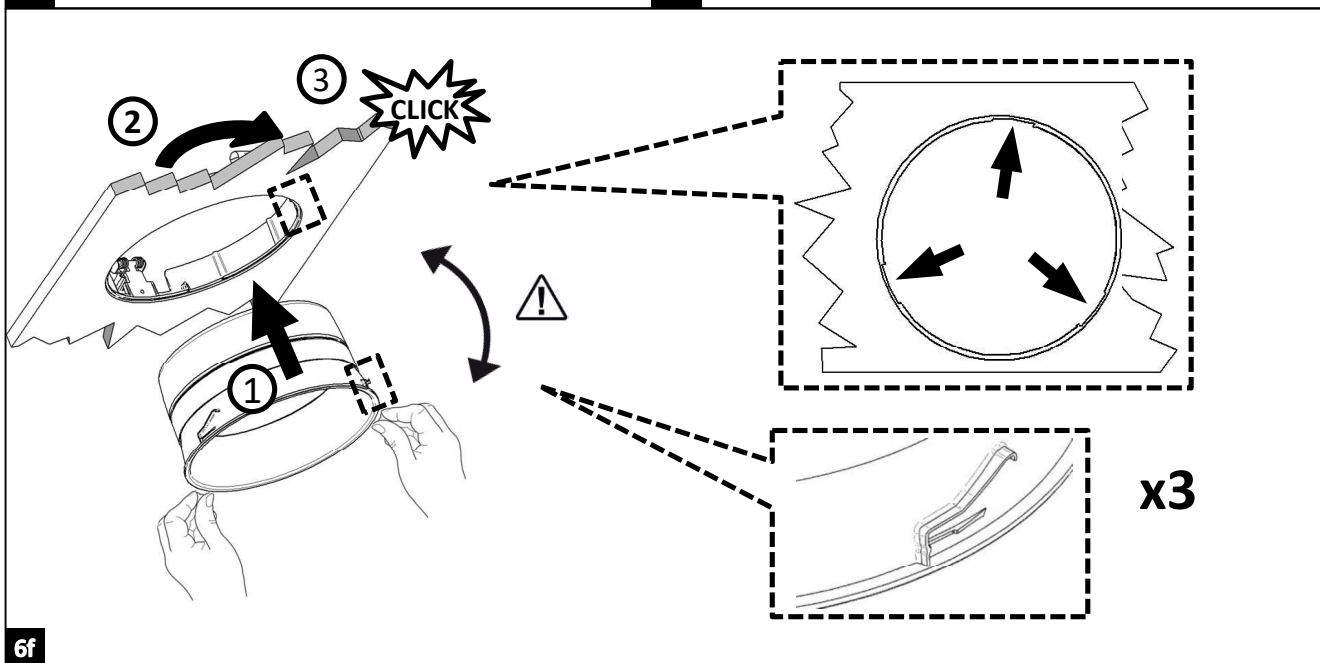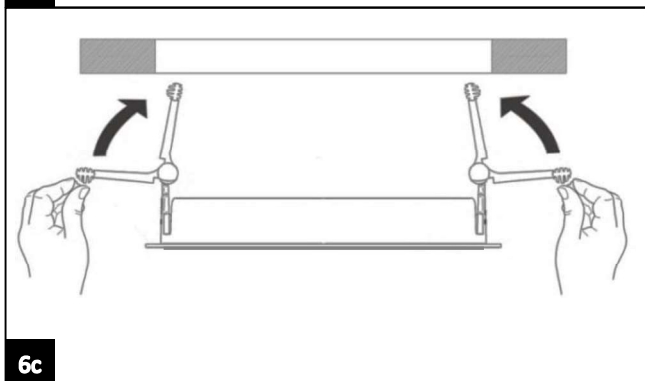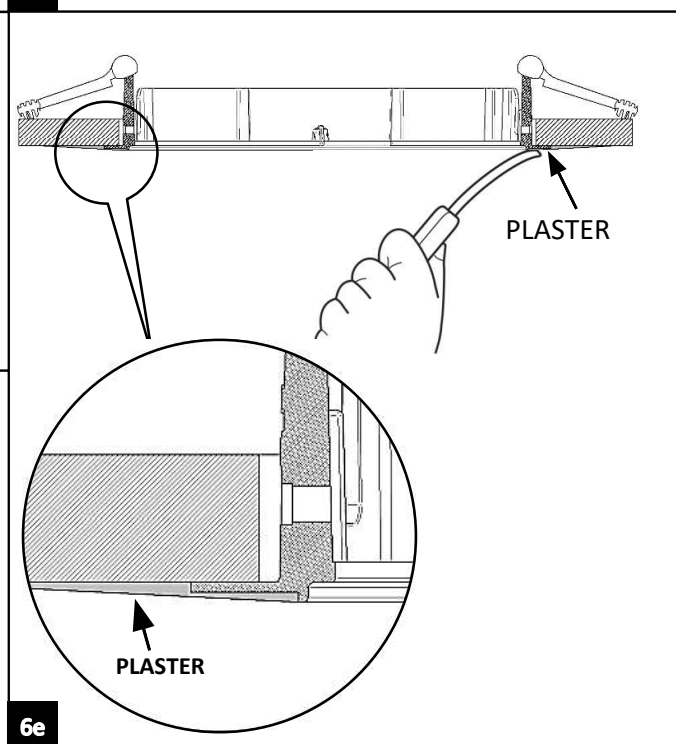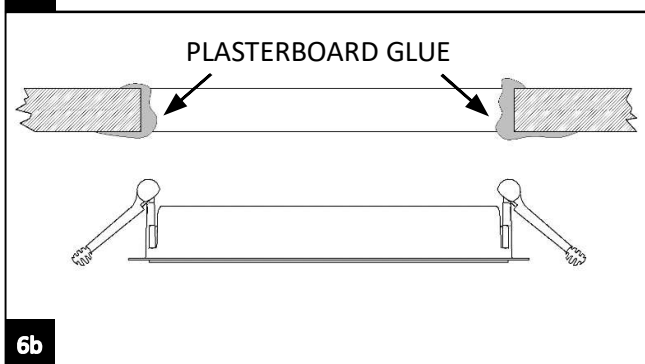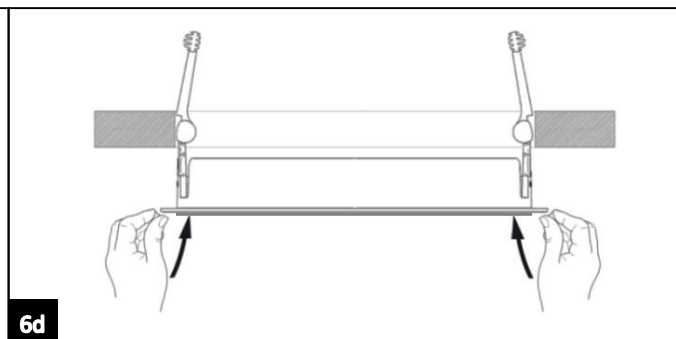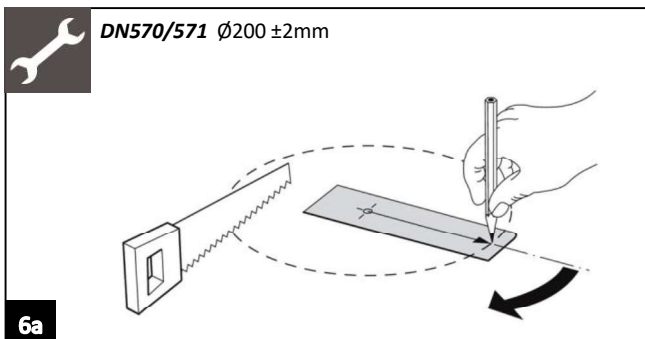

© 2018 Signify Holding.
 All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.
 The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.
 No liability will be accepted by the publisher for any consequence of its use.
 Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Signify Holding
 The Netherlands

