


PRODUCT DATASHEET

Type: NSP-TS
Art. Nr.: 40751



Short description

Stair heating in thin bed, length to measure, W 25cm

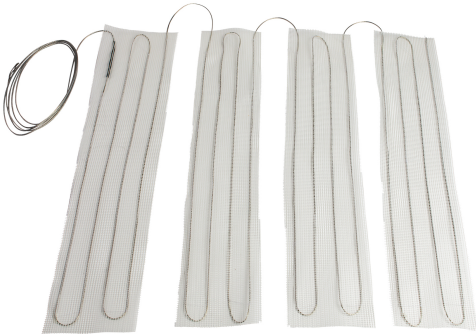

Product Description

The NSP-TS stair heater is ideal for (subsequent) installation on existing stairs - under tiles in an adhesive or mortar surface, under slabs, or a 2 cm thick, particularly non-slip and slip-resistant polyurethane covering. Advantageous for self-supporting stairs. Factory-made individual step mats and, if necessary, landings, assembled at the factory according to plan, consisting of glass fibre mesh and a robust special heating cable with permanently waterproof connection cable. TIP: We are happy to produce your connection cable to measure. Power: 250 to 300 W/m², nominal temperature: 150 °C, width: 25 cm, outer and inner sheath: Teflon, heat conductor thickness: 3.3 mm, protection rating: IP X7, CE marking, standard connection cable: 4 m, 2x1.0(1.5) mm² protective braiding, grid: 5x5 mm, voltage: choose from 230 or 400 V.

ETIM characteristics

Model	Heating cable	Connection voltage	230 40 Volt
With support mat	✓	Power	0
Fixation thermal conductor	Sewed	Heating conductor load	300 Watt per square metre
Self-adhesive	✗	Resistance	15 Watt per metre
Suitable for damp space	✓	Number of cold conductors	0 Ohm
Suitable as outdoor surface heating	✓	Length of cold conductors	1
Suitable as roof surface heating	✗	Surface	4000 Millimetre
With controller	✗	Length	1 Square metre
With room temperature controller	✗	Width	0 Millimetre
With floor temperature sensor	✗	Thickness	0 Millimetre
			3.3 Millimetre

Created on: 27/11/2023