

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60122687

Model :

NINPHAEA 3

Pump data

Pressure rating :
Min. fluid temperature :
Max. fluid temperature :
Max. Ambient temperature :

Requested data




Flow : 0 m³/h
Head : 0 m
Fluid : Water, pure
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :
Head :

Materials

Curve tolerance according to ISO 9906

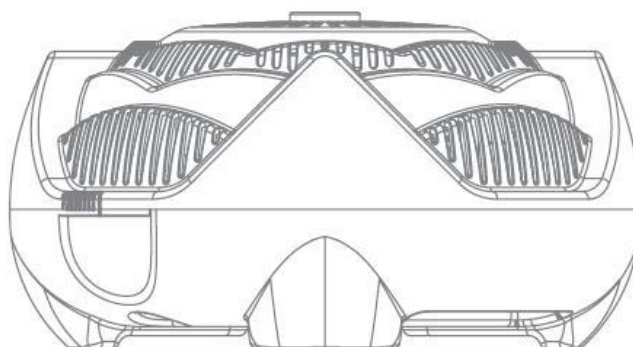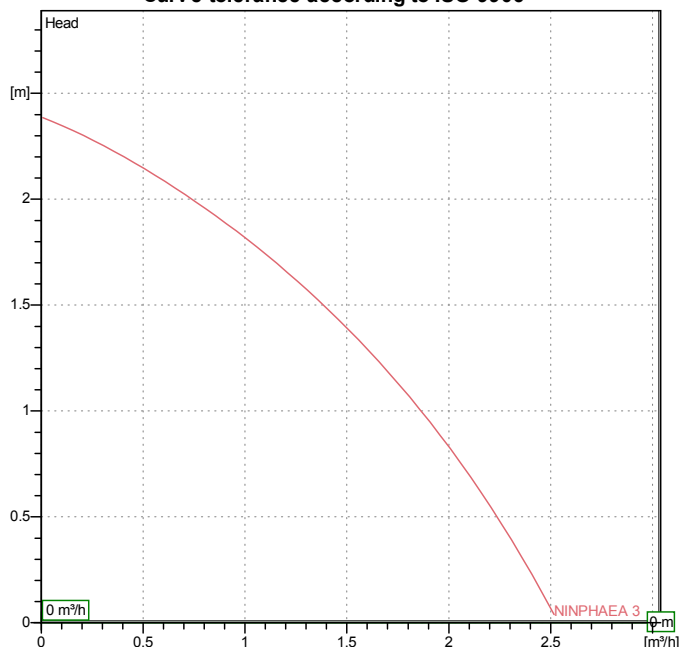

Motor data

Weight : 1.8 kg

Motor brand : DAB
Nominal power P2 : 0.015 kW
Rated voltage : 1~ 220-240 V
Nominal current : 0 A
Number of poles : 2
Rated speed : 2800 rpm
Degree of protection : --

50 Hz

Dimensions in mm

d	245				
h	130				
l	245				

Pump connection

Suction side : /
Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NINPHAEA 3

Curve tolerance according to ISO 9906

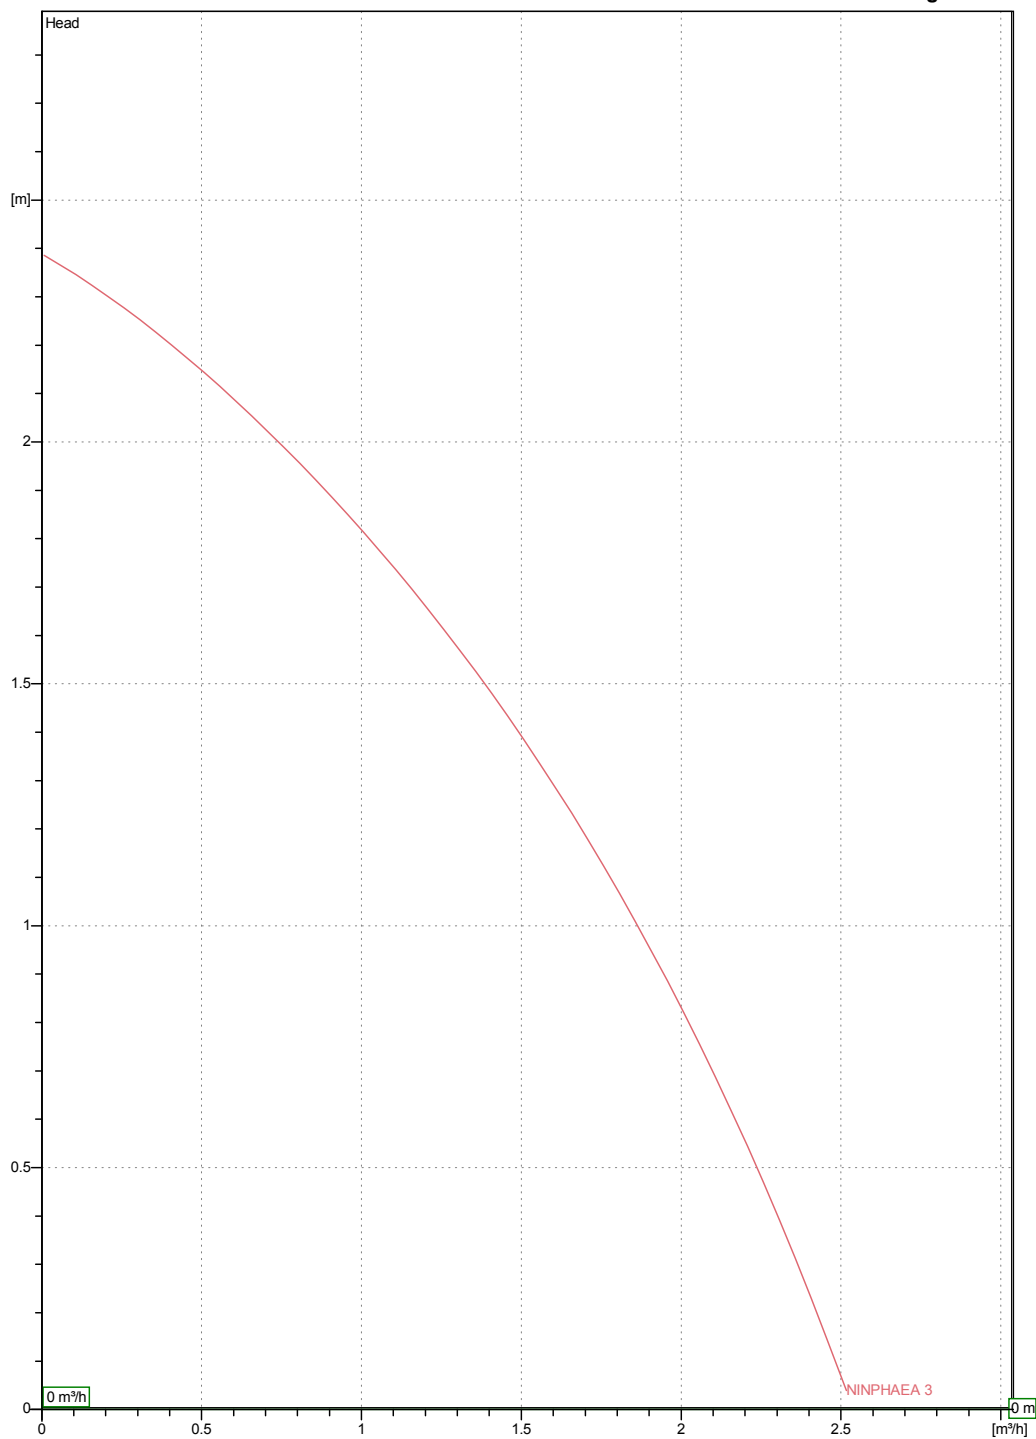

Hydraulic data (duty point)



Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NINPHAEA 3

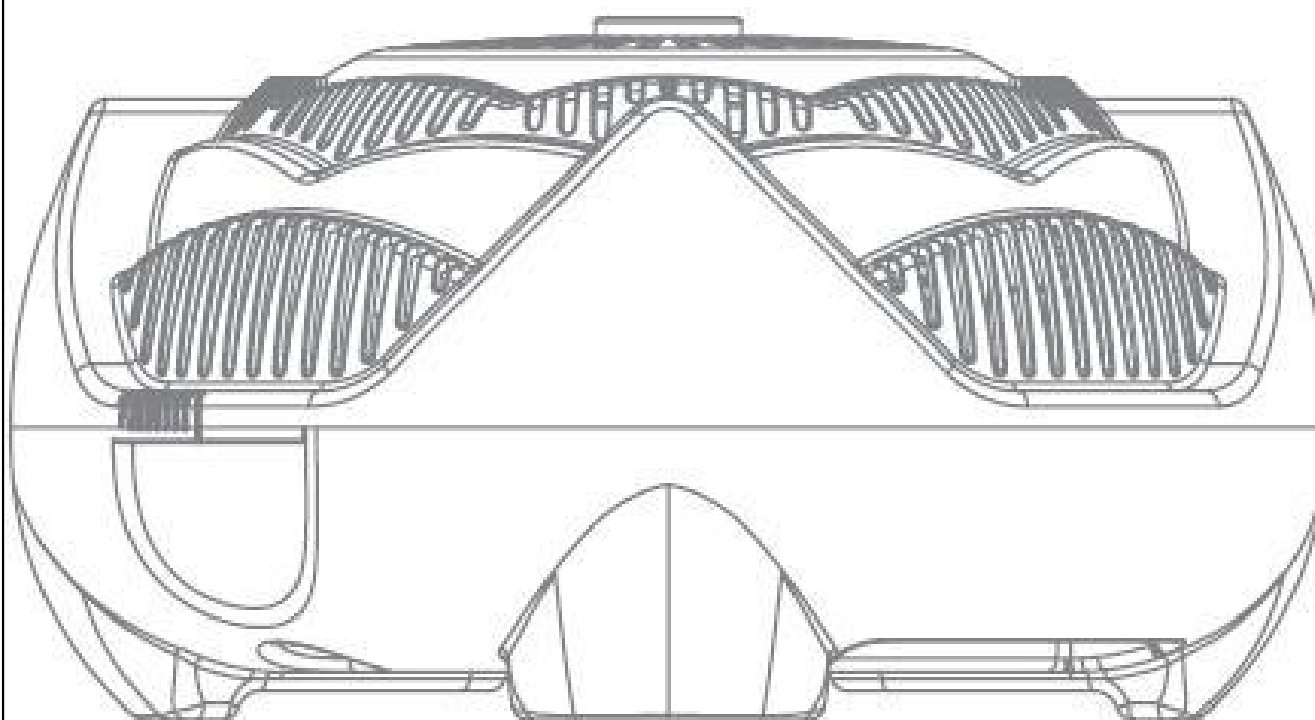

Dimensions in mm

Pump connection

1 d 245
2 h 130
3 l 245

Suction

Discharge

Project

Project ID

Created by

Created on

24/03/2016