

**Receiver**
**From**

Society  
Reference  
Address  
Phone  
Fax  
E-mail

**Item n° :**

60122686

**Model :**

NINPHAEA 2

**Pump data**

Pressure rating :

Min. fluid temperature :

Max. fluid temperature :

Max. Ambient temperature :

**Requested data**

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³




Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

**Hydraulic data (duty point)**

Flow :

Head :

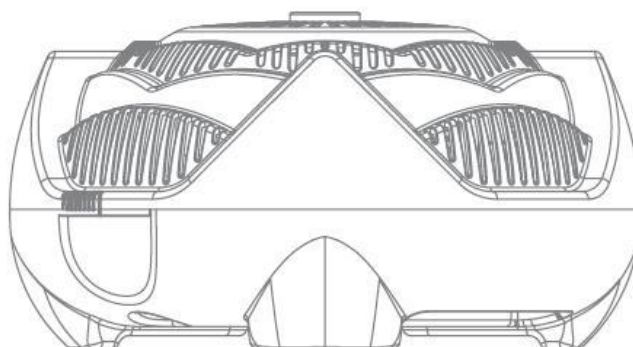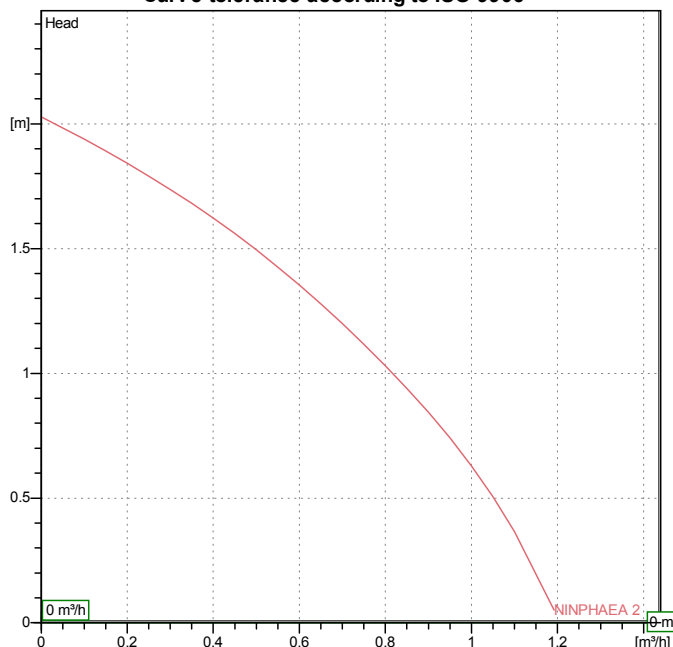**Materials**
**Curve tolerance according to ISO 9906**

**Motor data**
**Weight :** 1.5 kg

Motor brand : DAB

Nominal power P2 : 0.01 kW

Rated voltage : 1~ 220-240 V

50 Hz

Nominal current : 0 A

Number of poles : 2

Rated speed : 2800 rpm

Degree of protection : --

**Dimensions in mm**

|   |     |  |  |  |  |
|---|-----|--|--|--|--|
| d | 220 |  |  |  |  |
| h | 120 |  |  |  |  |
| l | 220 |  |  |  |  |

**Pump connection**

Suction side : /

Discharge side : /


Receiver

From

Society  
Reference  
Address  
Phone  
Fax  
E-mail

## NINPHAEA 2

Curve tolerance according to ISO 9906

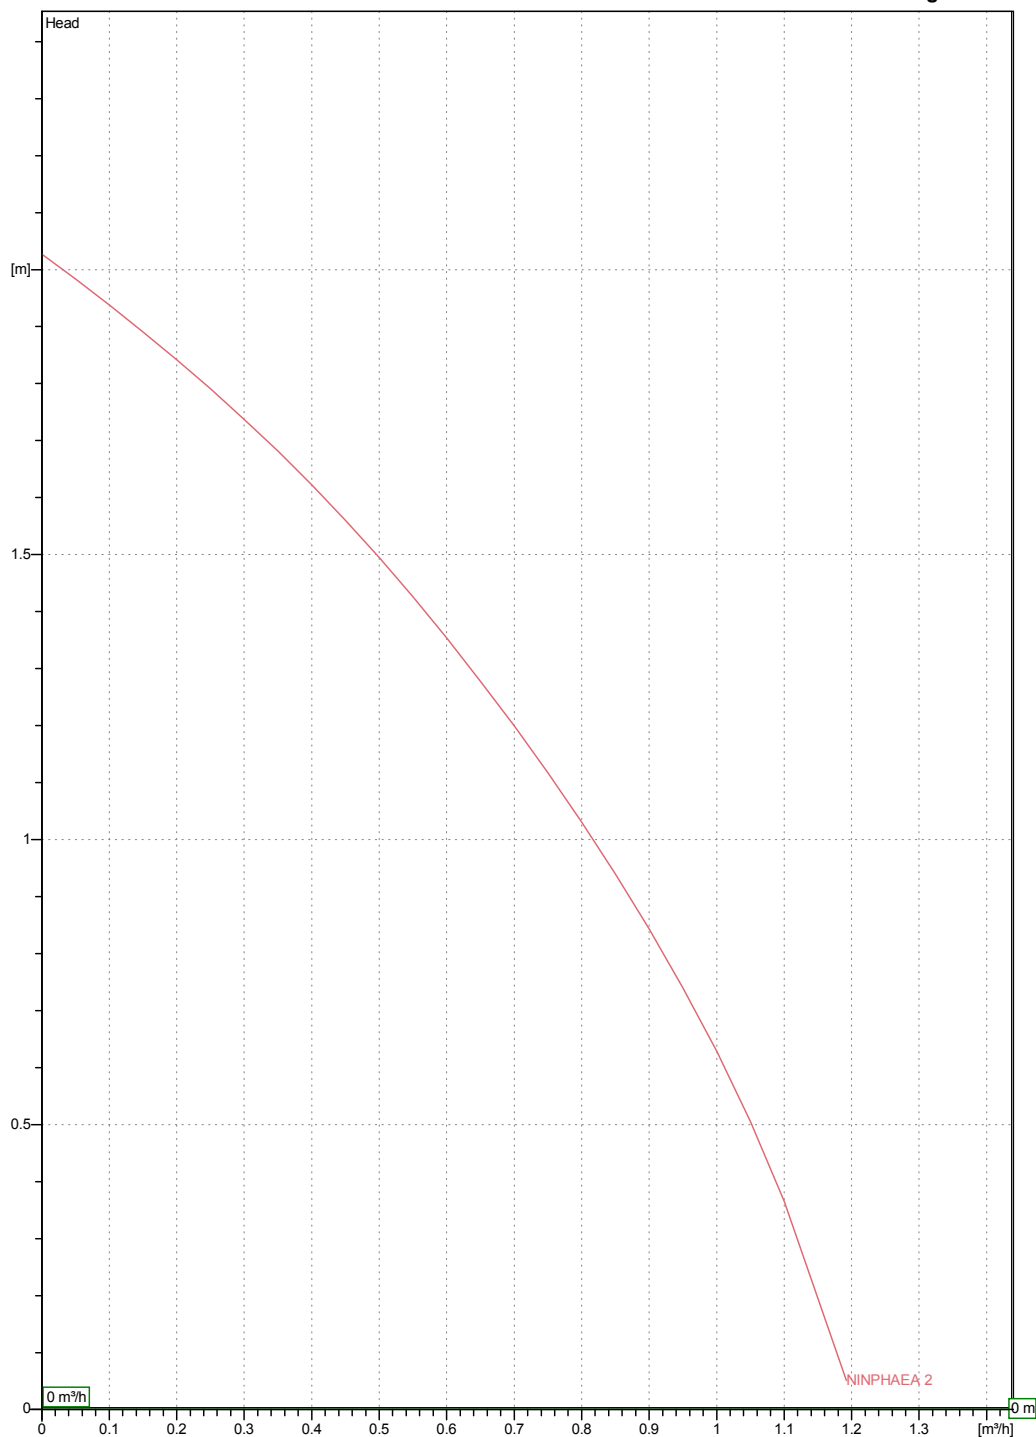

Hydraulic data (duty point)



|                |                  |                  |                                 |                           |
|----------------|------------------|------------------|---------------------------------|---------------------------|
| Suction side : | Discharge side : | Flow :<br>0 m³/h | Head :<br>0 m                   | Rated speed :<br>2800 rpm |
| Project        | Project ID       | Created by       | Created on<br><b>24/03/2016</b> |                           |

Receiver

From

Society  
Reference  
Address  
Phone  
Fax  
E-mail

**NINPHAEA 2**

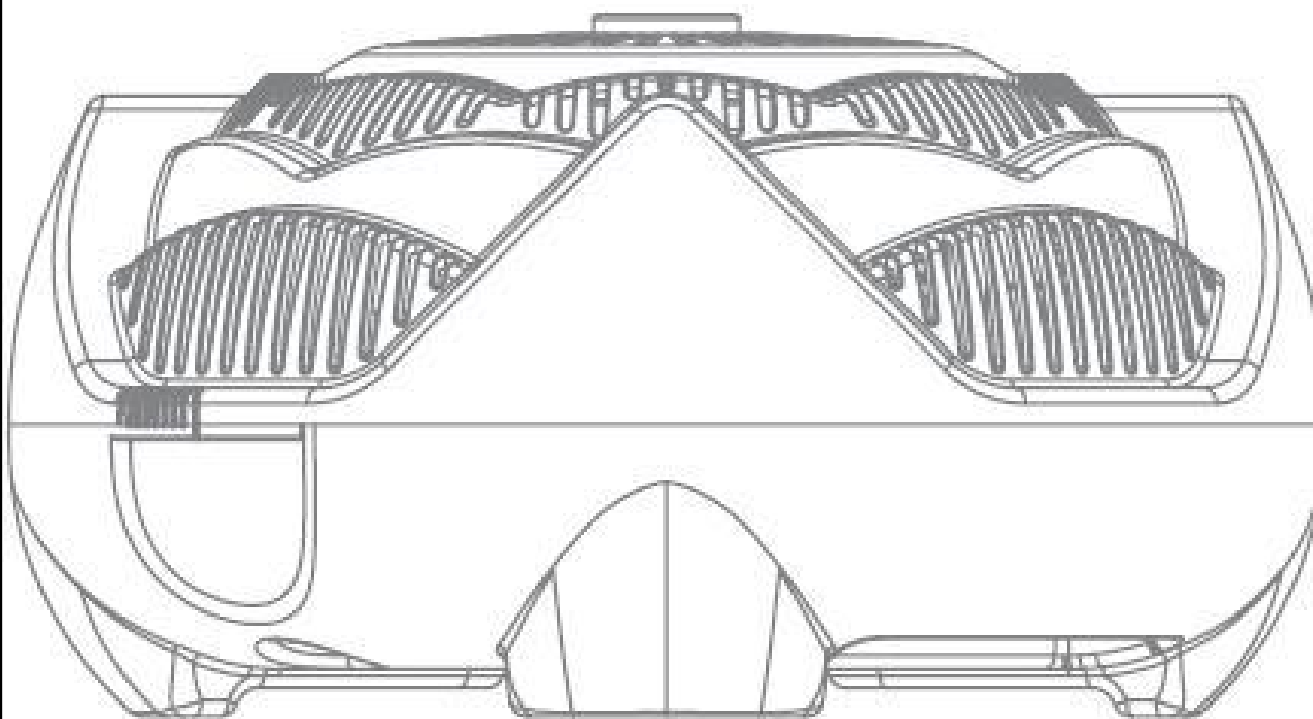

**Dimensions in mm**

**Pump connection**

1 d 220  
2 h 120  
3 l 220

Suction

Discharge

Project

Project ID

Created by

Created on

**24/03/2016**