

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60122689

Model :

NINPHAEA 5

Pump data

Pressure rating :

Min. fluid temperature :

Max. fluid temperature :

Max. Ambient temperature :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³




Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

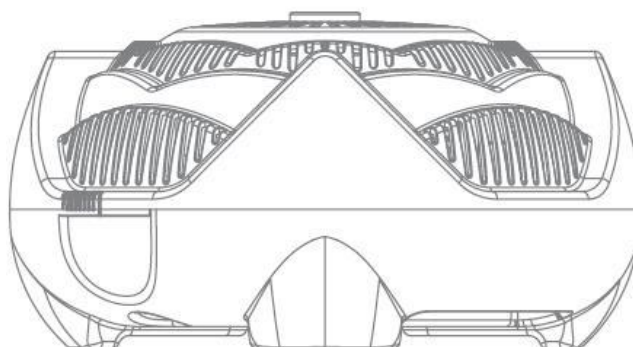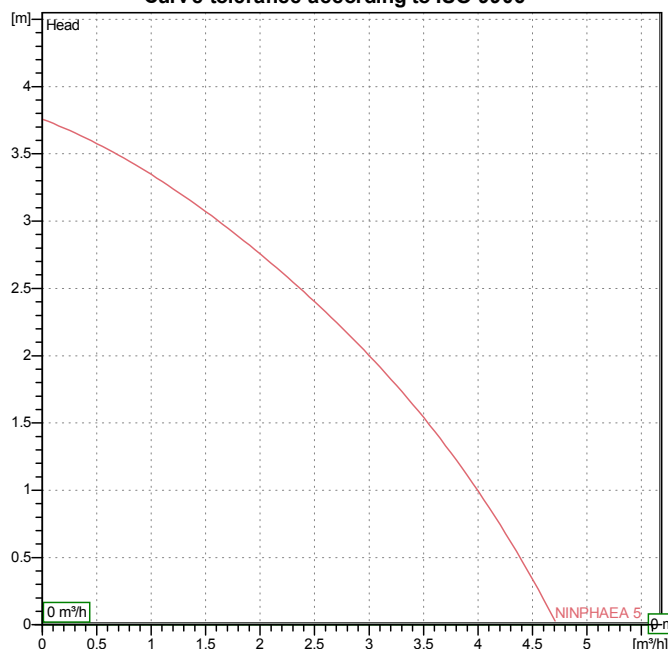Materials
Curve tolerance according to ISO 9906

Motor data
Weight : 2.7 kg

Motor brand : DAB

Nominal power P2 : 0.07 kW

Rated voltage : 1~ 220-240 V

50 Hz

Nominal current : 0 A

Number of poles : 2

Rated speed : 2800 rpm

Degree of protection : --

Dimensions in mm

d	290				
h	150				
l	290				

Pump connection

Suction side : /

Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NINPHAEA 5

Curve tolerance according to ISO 9906

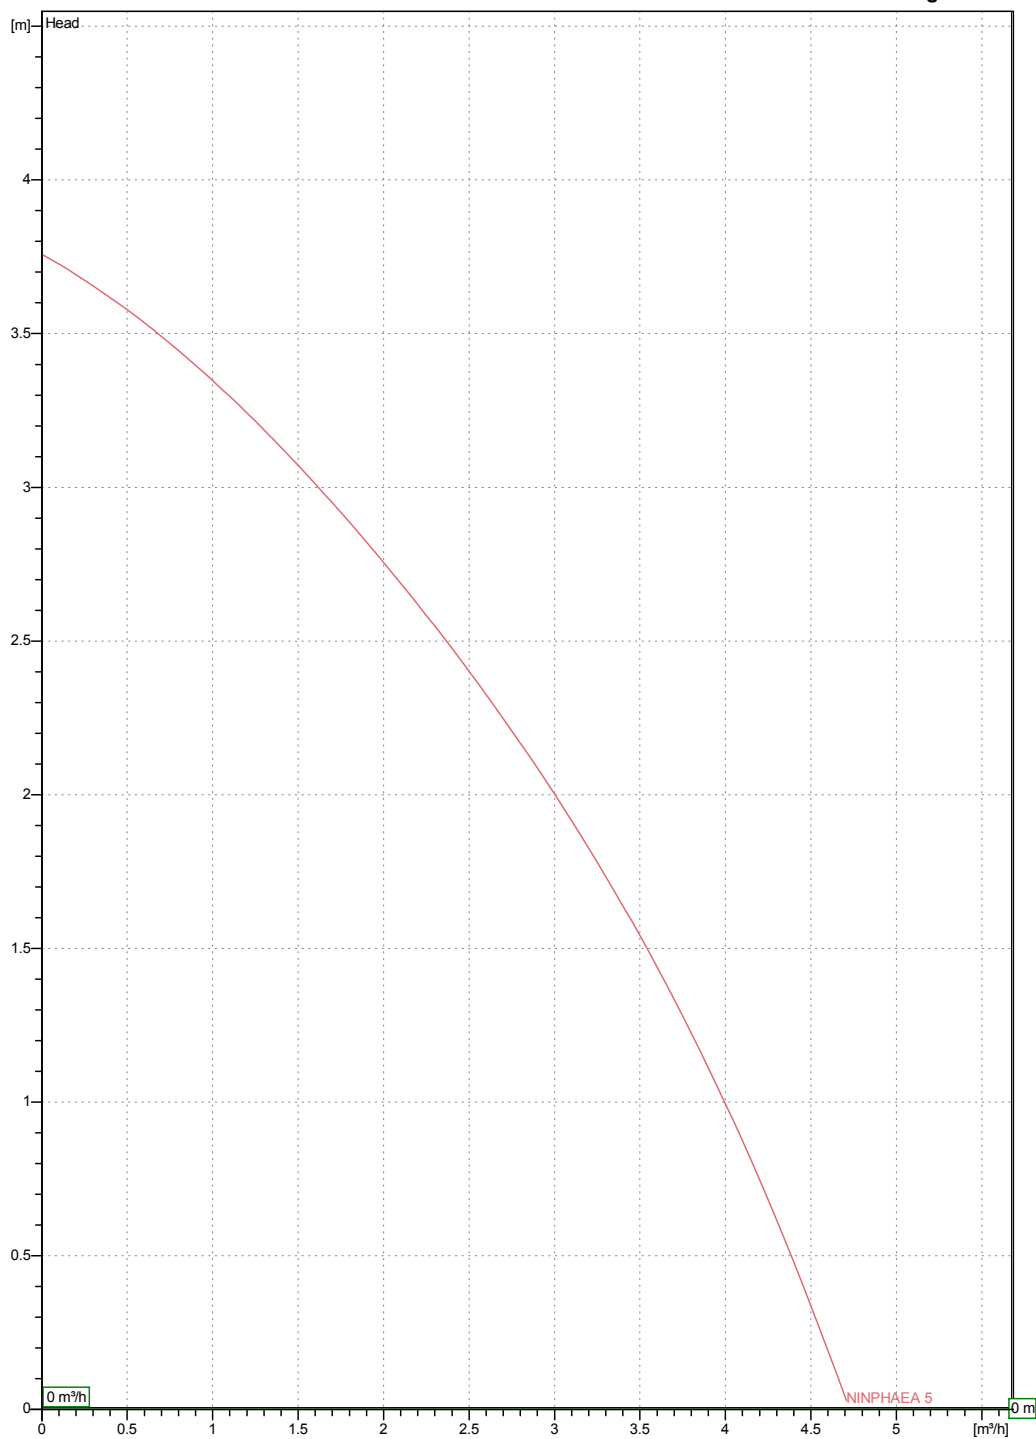

Hydraulic data (duty point)



Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NINPHAEA 5

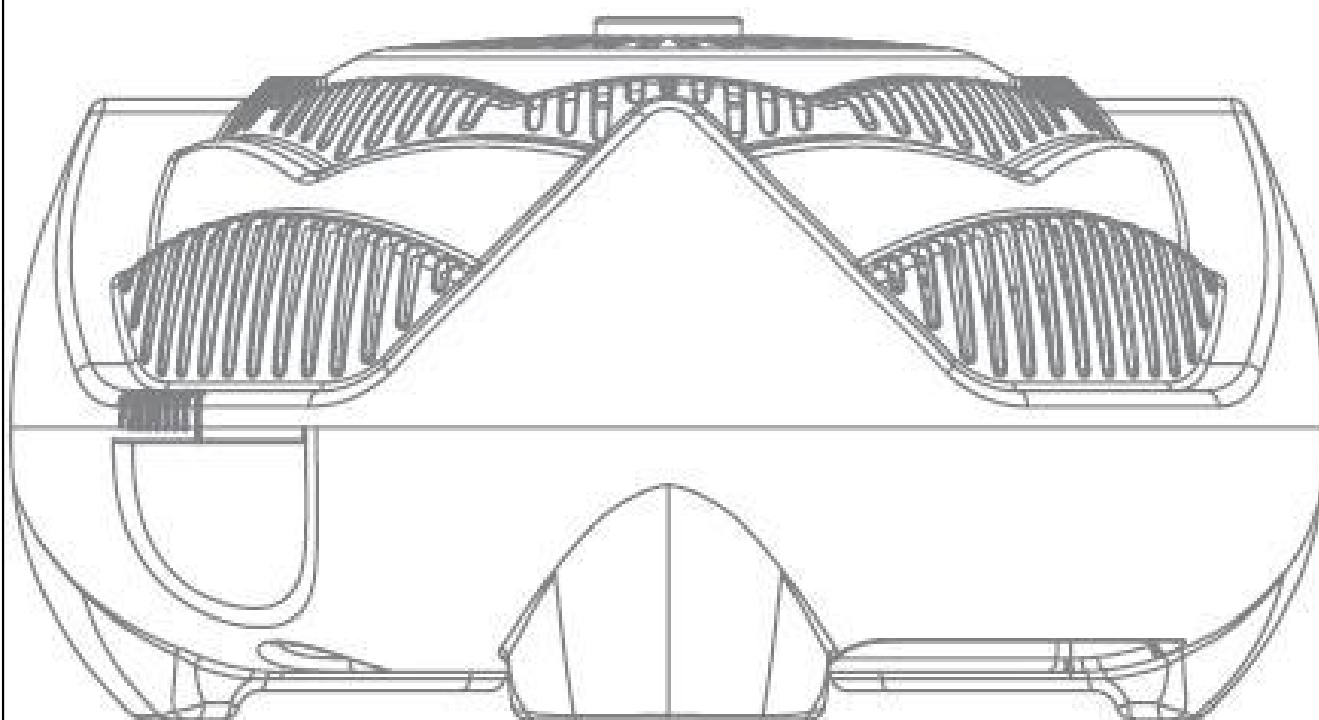

Dimensions in mm							Pump connection	
1	d	290					Suction	
2	h	150						
3	l	290						
							Discharge	
Project			Project ID			Created by		Created on 24/03/2016