

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60122625

Model :

DIVERTRON X 1000 M

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
Diffuser	Technopolymer
OR ring	NBR
Suction filter	Stainless Steel AISI 304
Motor shaft	AISI 416
Motor casing	Aluminium

Motor data
Weight : 11 kg

Motor brand : DAB

Nominal power P2 : 0.65 kW

Rated voltage : 1~ 220-240 V



50 Hz

Nominal current : 3.8 A

Number of poles : 2

Rated speed : 2800 rpm

Degree of protection : IP X8

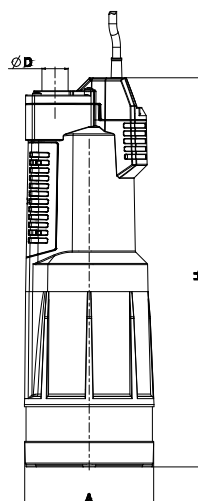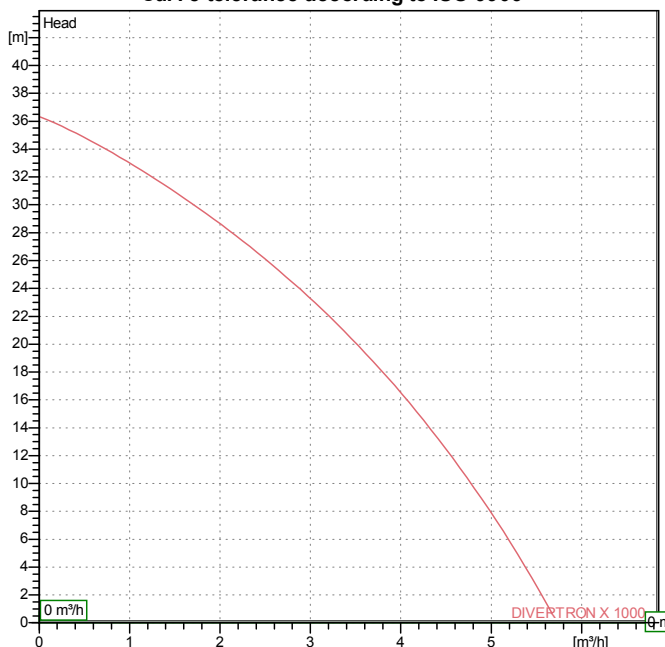Curve tolerance according to ISO 9906

Dimensions in mm

A	150				
D	30				
H	450				

Pump connection

Suction side : /

Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON X 1000 M

Curve tolerance according to ISO 9906

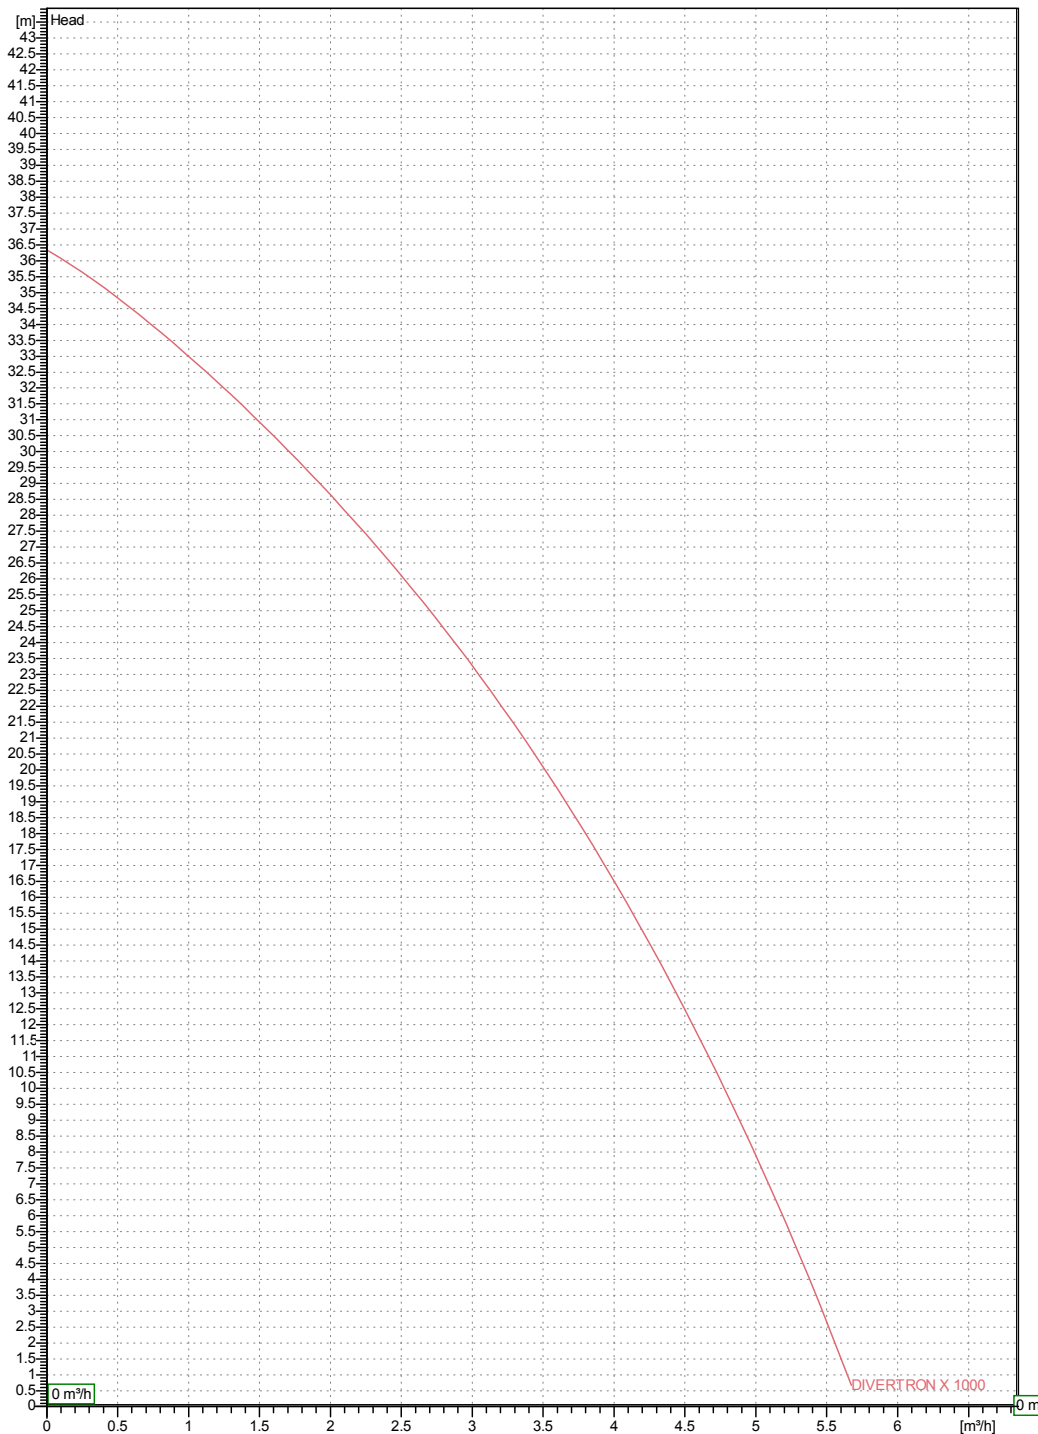

Hydraulic data (duty point)


Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON X 1000 M

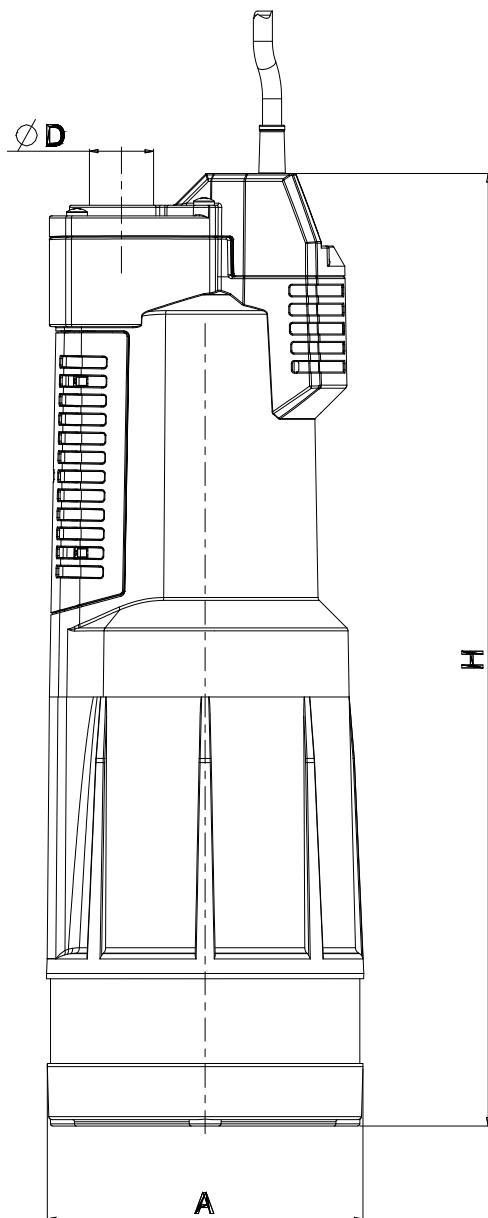

Dimensions in mm

Pump connection

1	A	150
2	D	30
3	H	450

Suction

Discharge

Project

Project ID

Created by

Created on

24/03/2016