comer industries driveshafts

End fittings		Max. torque
Tractor	Cod: –	–
Implement	Cod: –	–

Notes:

Anti-clockwise rotation

Warning !

Sections of driveline marked ⚠ are not shielded and must be shielded by an interactive guarding system.

COMER spa declines responsibility if proper guards are not provided or maintained.

Features

Series:	–
Type:	60
Code:	146.364.014
Description:	Torque limiters RF6
Customer's code:	–
Colour:	Yellow

Last drawing

Index: – Date: –

Application

–

Driveline data

X	–
Y	–
E	–
I	–
P	–


Overlap

	Steel tubes	Guard
Max.	–	–
Min.	–	–

Greasing point

1)	–
2)	–

The dimensioning is cross to cross

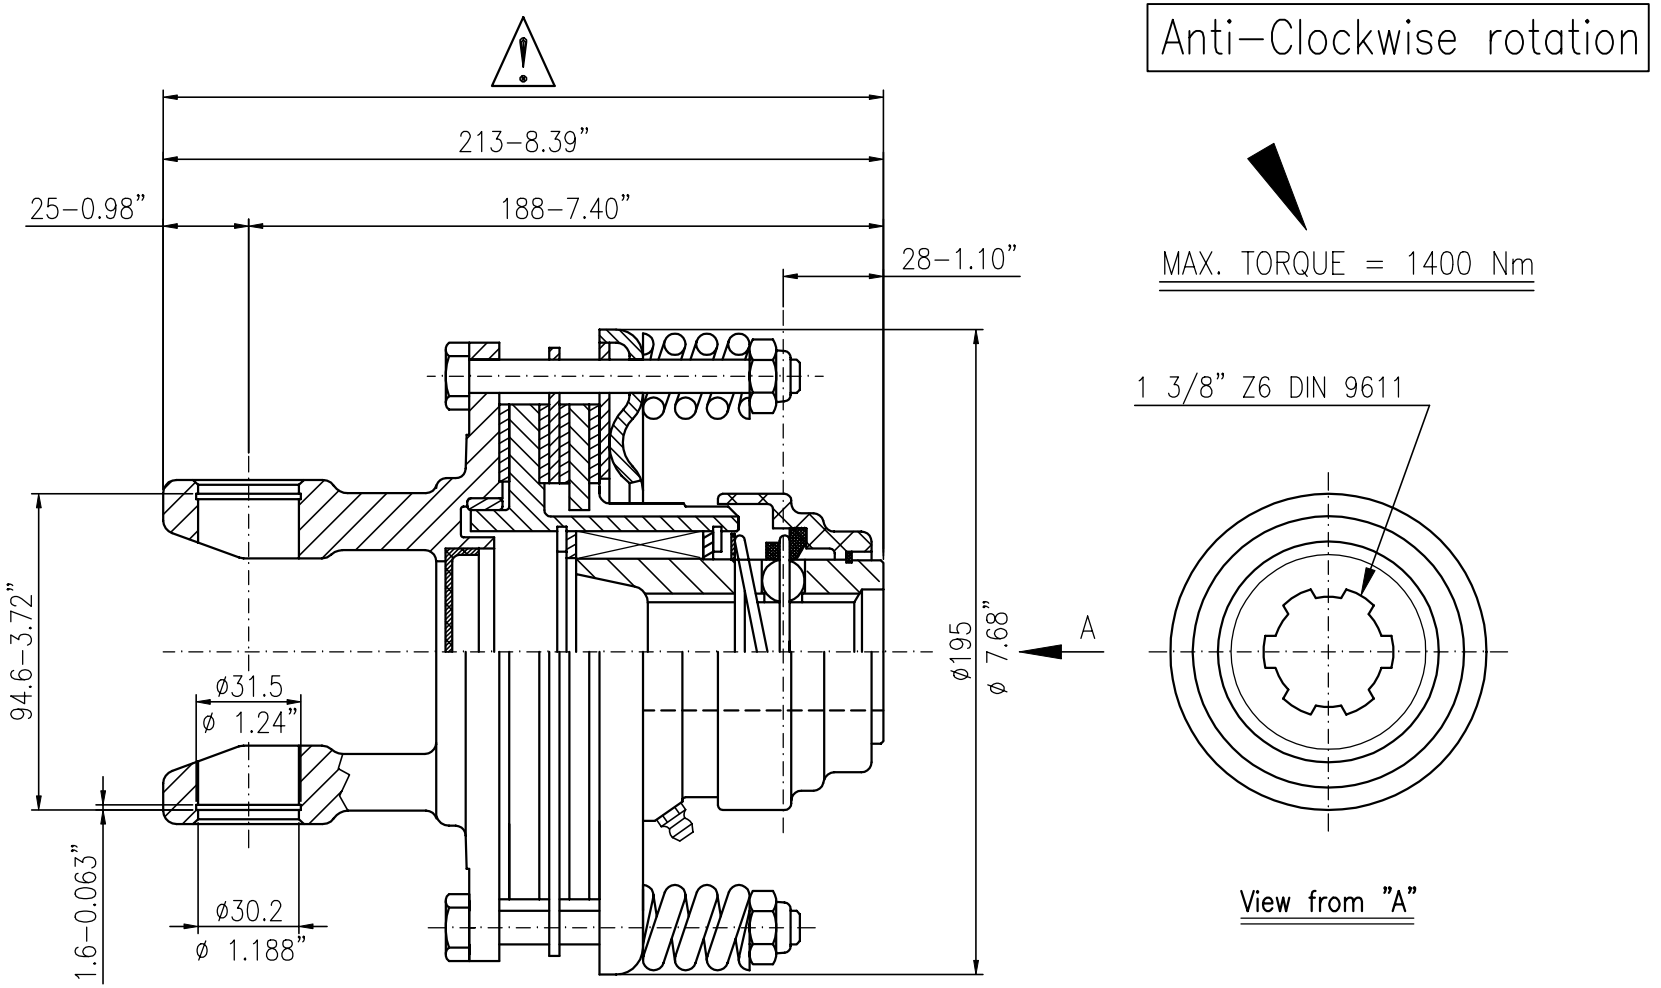

Cross and tubes

– – – –

Data 540 r.p.m.				Data 1000 r.p.m.				1100 min.$^{-1}$ r.p.m. max.
KW	CV	Nm.	in.lb.	KW	CV	Nm.	in.lb.	
47	64	830	7350	74	100	710	6259	

Continuous operation data and conditions,working angle 5°, average life 1000 hours

Data for only critical velocity			
540 r.p.m.		1000 r.p.m.	
Max.	–	Max.	–
L max.	–	L max.	–
Checked:		Signed by:	F.L.

Customer: ITEC

Date: 11–04–08