


OPERATION

1. Select location to mount LED CONTROLLER.
2. Use double-sided tape (or similar) and mount on clean surface.
3. Route RED and BLACK wires to vehicle power source.
4. Select desired Flash Pattern using YELLOW wire.

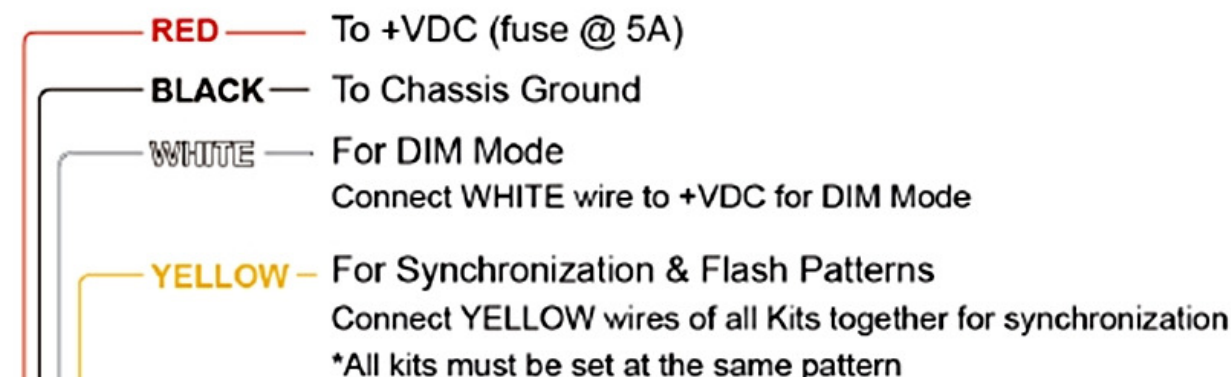

For Flash Modes:

1. Apply +VDC to **RED** and **YELLOW** wires simultaneously to enter Flash mode. (lightheds will
2. Remove **YELLOW** wire from +VDC and momentarily apply to +VDC to change Modes:
 - Mode 1 = Head1 alternate Head2
 - Mode 2 = Head1&2 flash simultaneously

Momentarily apply +VDC to **YELLOW** wire:

- once for next pattern
- quickly three times for reset

NOTE: Make sure to cover all unused bare wires.

to lighthouse or
extension cable

