


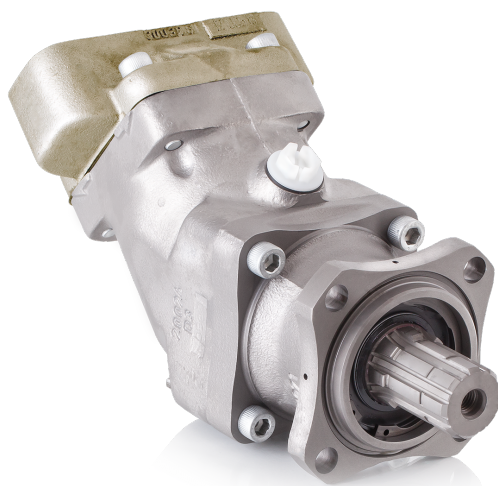

SCM 012-130 DIN is a series of axial piston motors particularly suitable for mobile hydraulics. SCM 012-130 DIN is of the bent-axis type with spherical pistons.

The design gives a compact motor with few moving parts, high starting torque and high operational reliability. It covers the entire displacement range 12-130 cm³/rev. with max. pressure 400 bar.

It's high level of reliability is due to the choice of materials, hardening methods, surface structures and the quality assured manufacturing process.

Other advantages:

- Smooth operation over the entire speed range
- High efficiency
- Suitable for applications with high angular accelerations due to its high rotary stiffness

Motor SCM 012-130 DIN		012	017	025	034	040	047	056	064	084	108	130
Displacement	cm ³ /rev	12.6	17.0	25.4	34.2	41.2	47.1	56.7	63.5	83.6	108.0	130.0
Working pressure												
max intermittent	bar	400	400	400	400	400	400	400	400	400	400	330
max continuous		350	350	350	350	350	350	350	350	350	350	280
Revolutions												
max intermittent	rpm	3000	3000	3000	3000	2500	2500	2500	2500	2000	2000	2000
max continuous		2400	2400	2400	2400	2000	2000	2000	2000	1600	1600	1600
min continuous		300	300	300	300	300	300	300	300	300	300	300
Power												
max intermittent	kW	18	24	36	49	57	65	78	88	93	120	124
max continuous		14	19	29	39	46	52	62	70	74	96	99
Starting torque theoretical value	Nm/bar	0.20	0.27	0.40	0.54	0.66	0.75	0.89	1.0	1.33	1.71	2.06
Moment of inertia (x 10 ⁻³)	kg m ²	0.9	0.9	1.1	1.1	2.6	2.6	2.6	2.6	7.4	7.4	7.4
Max intermittent housing pressure	bar	5	5	5	5	5	5	5	5	5	5	5
Weight	kg	8.4	8.4	8.6	8.6	13.0	13.0	13.0	13.0	18.2	18.2	18.2

Intermittent operation refers to a max of 6 seconds per minute, representing e.g. peaks in rotational speed during unloading and acceleration.

Versions, main data

Example

SC	M	-	012	W	-	N	-	DL4	-	L35	-	S3	G	-	1	00
Line	1		2	3		4		5		6		7	8		9	10

Line	
SC	Sunfab Compact, bent-axis design

1. Type	
M	Motor

2. Displacement	
012 017 025 034 040 047 056 064 084 108 130	

3. Direction of rotation	
W	Independent

4. Sealing	
N	Nitrile

5. Mounting flange	
ISO 7653-D	
DL4	ø 80

6. Shaft	
DIN 5462 / ISO 14	
L35	8x32x34.9

X = Standard, preferred
O = Contact Sunfab

7. Connection cover		012	017	025	034	040	047	056	064	084	108	130
S1	40° Mount flange vertical *	-	-	-	-	-	-	-	-	X	X	X
S2	40° Mount flange horizontal *	-	-	-	-	X	X	X	X	-	-	-
S3	40° threaded connection *	X	X	X	X	-	-	-	-	-	-	-
V1	90° Mount flange vertical *	-	-	-	-	-	-	-	-	X	X	X
V2	90° Mount flange horizontal *	-	-	X	X	X	X	X	X	X	X	X
R1	Side connections, flanged *	-	-	X	X	X	X	X	X	X	X	X
K3	Combicover 90° side conn. thread .	X	X	X	X	-	-	-	-	-	-	-

* According to SAE J518 code 62

8. Connections		012	017	025	034	040	047	056	064	084	108	130
G	ISO G*	X	X	X	X	-	-	-	-	-	-	-
M	Metric **	-	-	X	X	X	X	X	X	X	X	X
U	UN***	-	-	X	X	X	X	X	X	X	X	X


* Only threaded connections
** Only flanged connections
*** Only available for S covers

9. Additional	
1	External drainage


10. Speed sensor		012	017	025	034	040	047	056	064	084	108	130
00	No speed sensor	X	X	X	X	X	X	X	X	X	X	X
P1	Prepared for speed sensor	X	X	X	X	X	X	X	X	X	X	X
S1	Fitted speed sensor type PNP*	X	X	X	X	X	X	X	X	X	X	X
S2	Fitted speed sensor type NPN*	X	X	X	X	X	X	X	X	X	X	X

* See separate brochure "Speed sensor hall" for more information.


Dimensions SCM 012-034

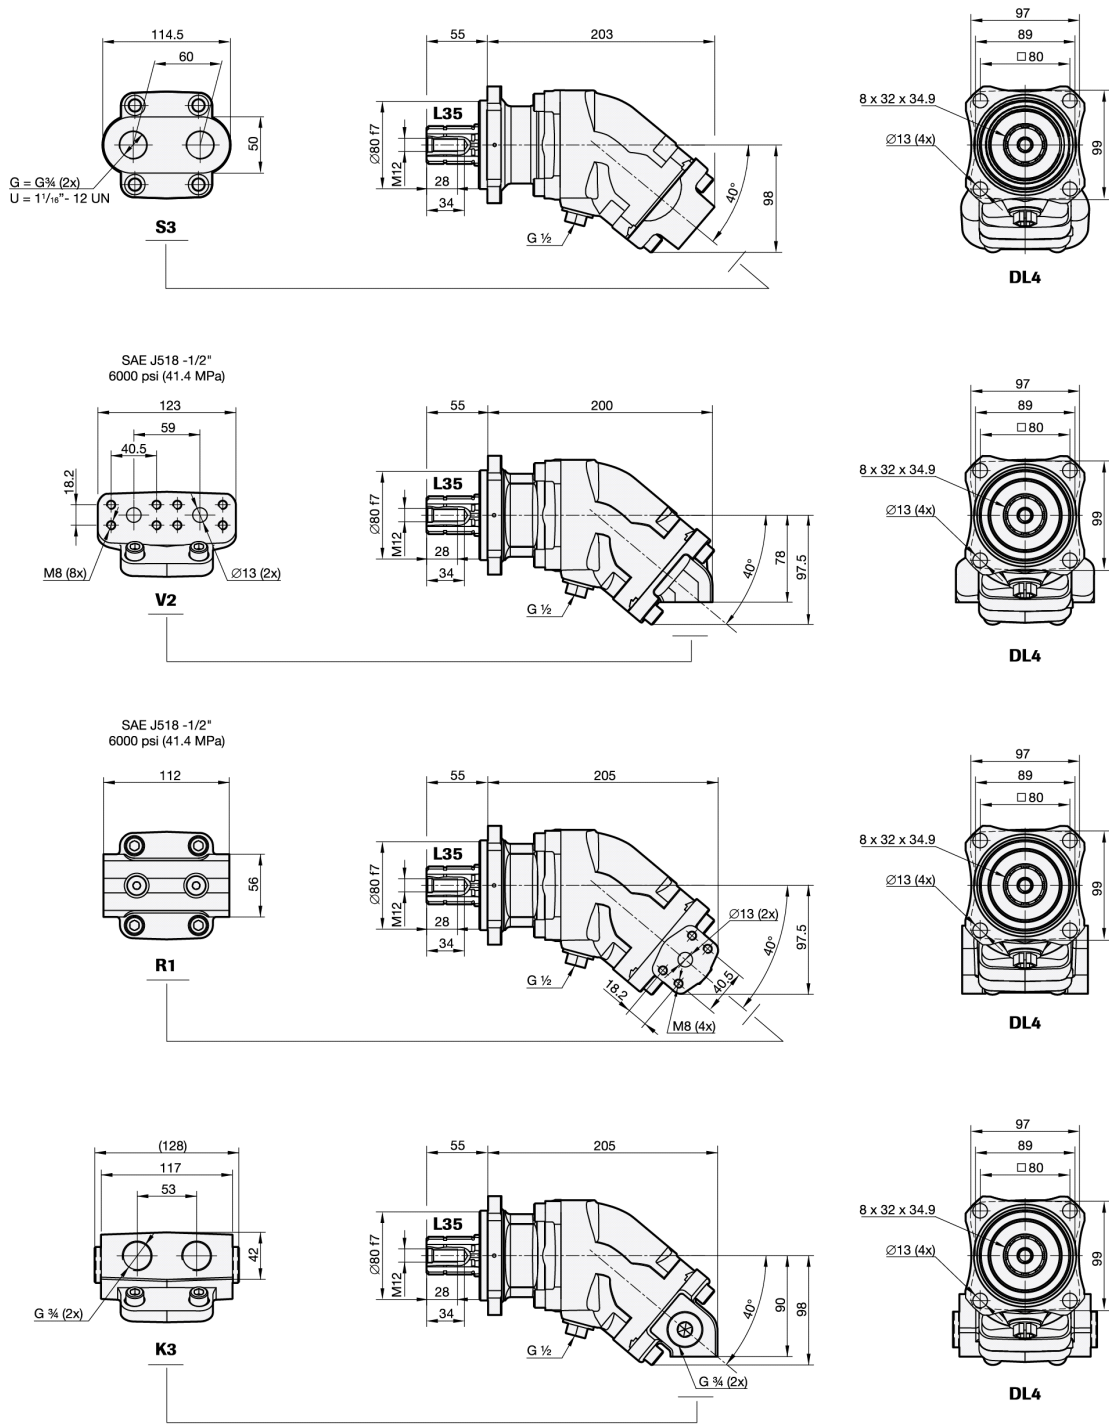

SCM 040-064

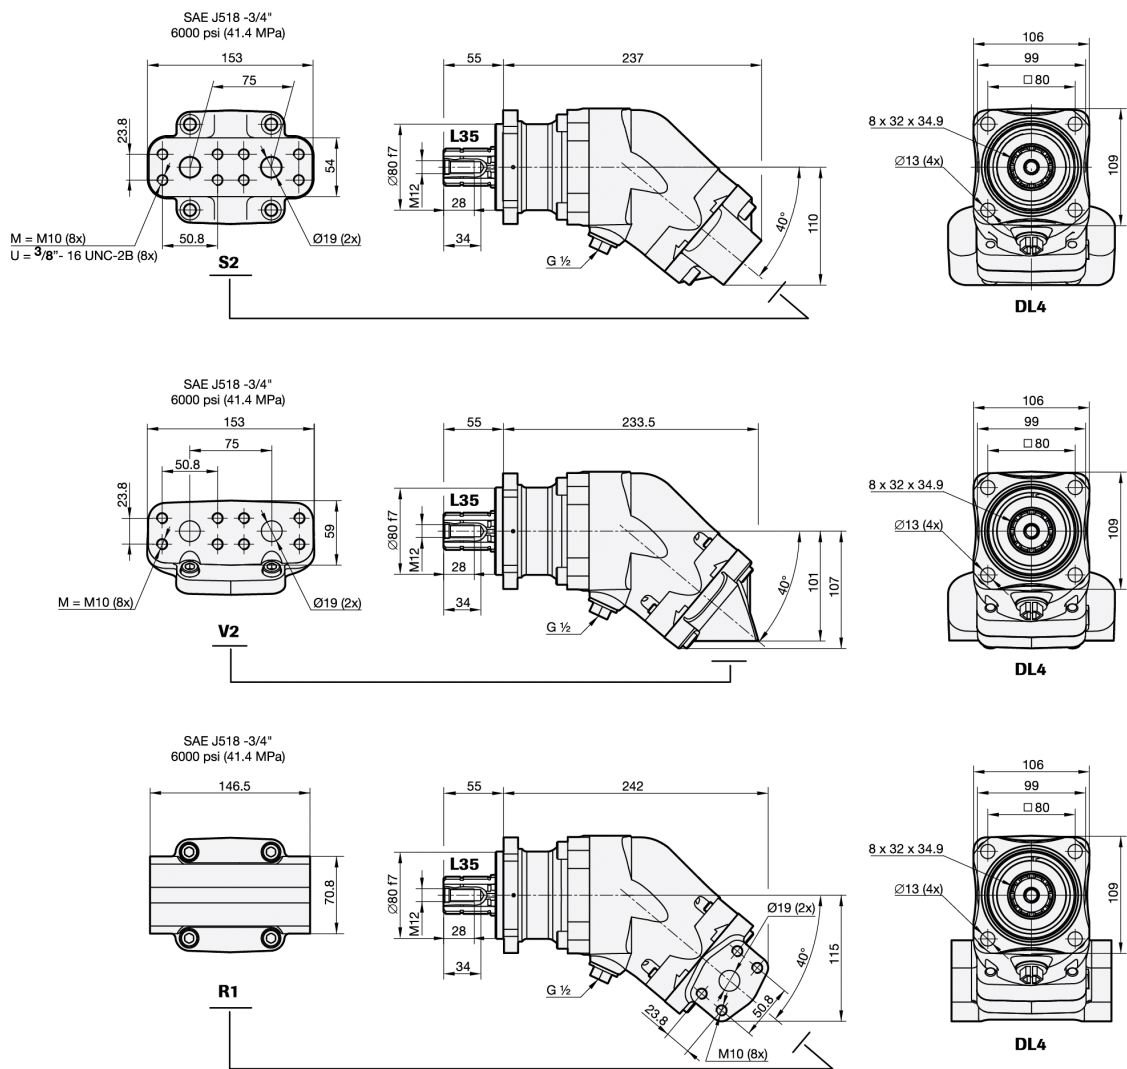



SCM 084-130

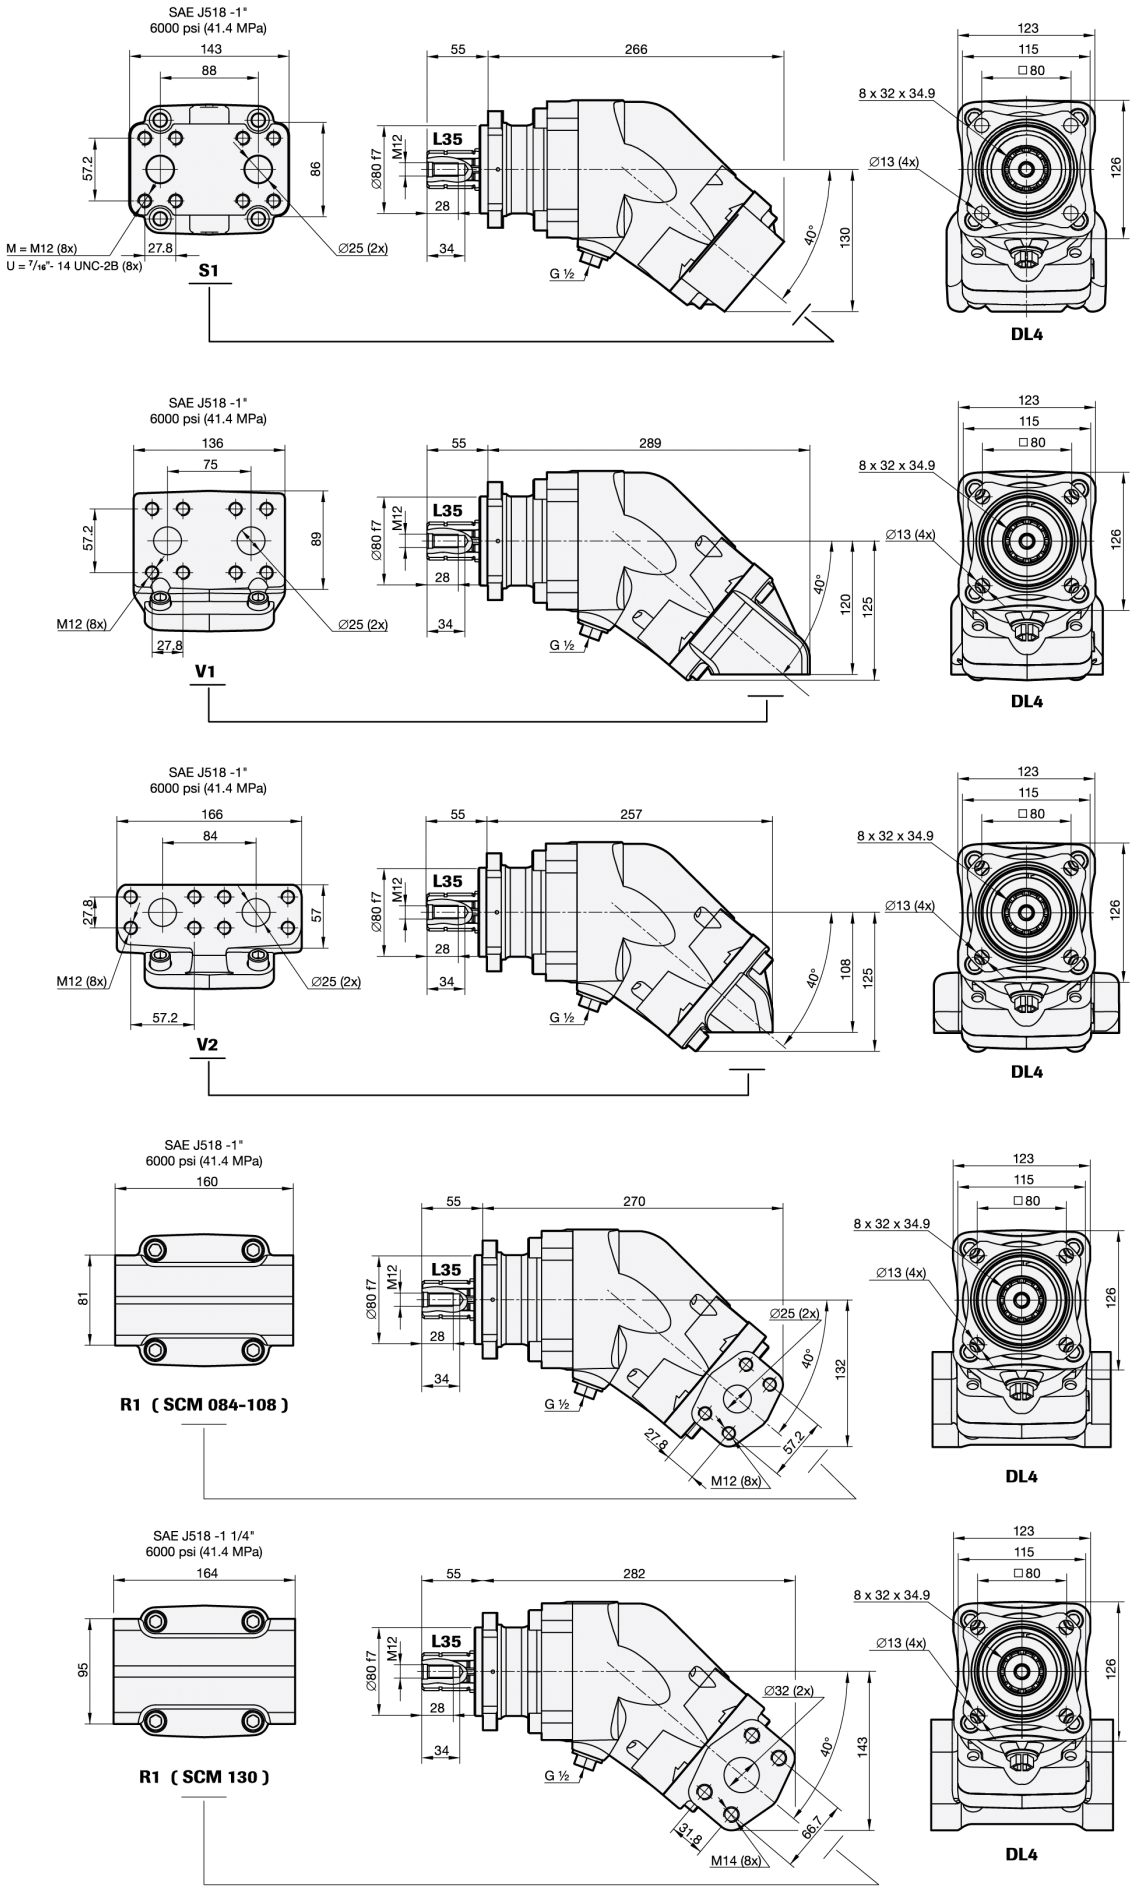

General instructions

Shaft loads

The service life of the motor largely depends on the service life of the bearings. These are affected by the operating conditions such as speed, pressure, oil viscosity and degree of purification.

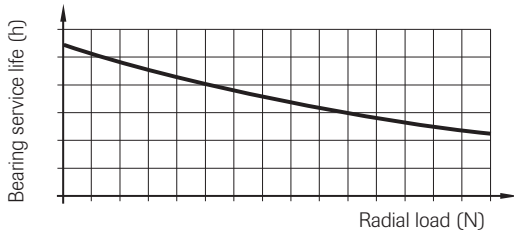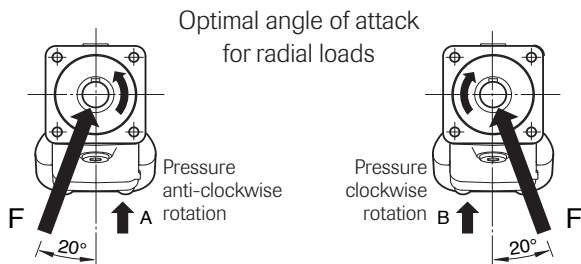


External loading of the shaft, its size, direction and location also affect the service life of the bearings.

If a calculation of bearing service life is required for special applications, contact Sunfab Hydraulics.

Installation

The motor housing is filled with oil to at least 50% of the volume before start up. The drainage hose is connected to the drainage outlet positioned highest on the motor. The other end is connected below the oil level in the oil tank.

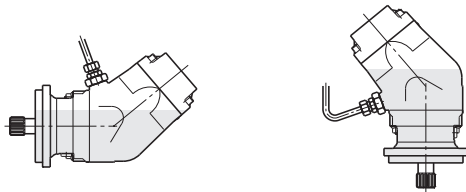

Hydraulic fluids

High performance oil meeting the specifications of ISO type HM, DIN 51524-2HLP or better must be used. Min. viscosity 10 cSt is required to guarantee lubrication. Ideal viscosity is 20 - 40 cSt.

Pipe dimensions

The recommended flow velocity in the pressure line is max 7 m/sec.

Filtering

Cleanliness ISO norm 4406, code 16/13 is recommended.

Useful formulaes

Required flow rate $Q = \frac{D \times n}{1000 \times \eta_v}$ litres/min.

Speed $n = \frac{Q \times 1000 \times \eta_v}{D}$ RPM

Torque $M = \frac{D \times \Delta p \times \eta_{hm}}{6.3}$ Nm

Power $P = \frac{Q \times \Delta p \times \eta_t}{60}$ kW

D = displacement, cm³/rev

n = revolutions, rev/min

P = power, kW

Q = flow, litre/min

η_v = volumetric efficiency

η_{hm} = hydromechanical efficiency

η_t = total efficiency = $\eta_v \times \eta_{hm}$

M = torque, Nm

Δp = pressure difference between inlet and outlet on the hydraulic motor, MPa



WARNING

When the motor is in use:

1. Do not touch the pressure pipe
2. Beware of rotating parts
3. The motor and pipes can reach high temperatures

*Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.
© Copyright 2015 Sunfab Hydraulics AB. All Rights Reserved.*