DOTCO

45-8195

15L14 & 15S14 Series
.3 hp Ergo Right Angle, Geared Drills

15L14 87 - 38 OH* Typical Model / Typisches Modell

L= Lever Throttle
S=Lock- Off Lever Throttle

Speed Code - *(select one)*

87 = 1,500 RPM
88 = 2,400 RPM
89 = 3,600 RPM
90 = 800 RPM
91 = 500 RPM

(*) **Overhose Option**- extra cost.
OH Specifies overhose components on rear exhaust models only.

Termination Code - *(select one)*

31 = #10 -32 Internal Threaded Spindle
32 = #1/4"- 28 Internal Threaded Spindle
34 = #5/16"-24 Internal Threaded Spindle
35 = #3/8"-24 Internal Threaded Spindle
36 = 300 Series Collet Chuck (1/4" standard
37 = 0-5/32" Cap. Drill Chuck
38 = 0-1/4" Cap. Drill Chuck
40 = 3/8"-24 External Threaded Spindle (no chuck)
45 = Universal Series Collet Chuck (1/4" standard)
51 = 1/16"-3/8" Cap. Drill Chuck (No. 31BA)


For additional product information visit our website at http://www.coopertools.com

CooperTools
P.O. BOX 1410
Lexington, South Carolina 29071-1410

DOTCO®


Models 15-14 Angle Drills

Housings and Motor Assemblies

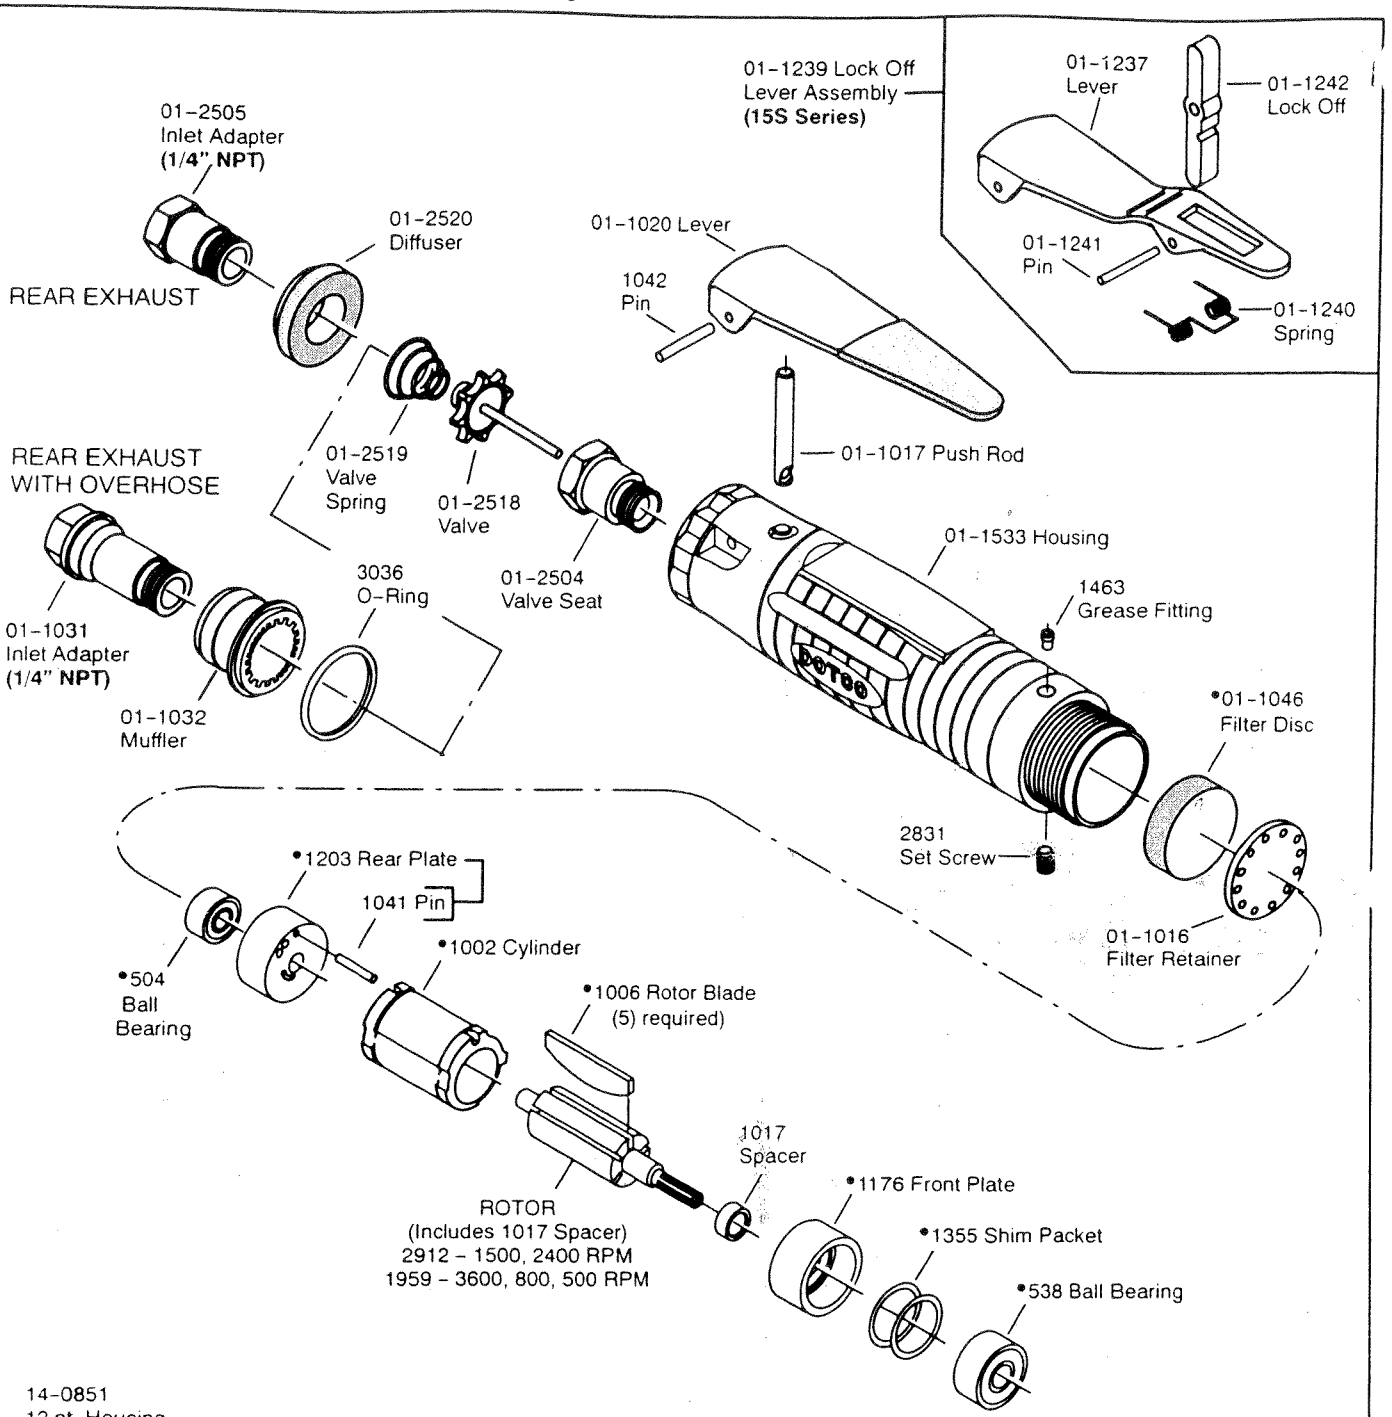

NOT SHOWN:
45-0980 Gear Lube
45-1982 Grease Gun

(•) Indicates recommended spare part. Order one (1) or one set for every 6-10 tools. Small, easily lost or low cost parts should also be ordered on the basis of 3-4 per 10 tools.

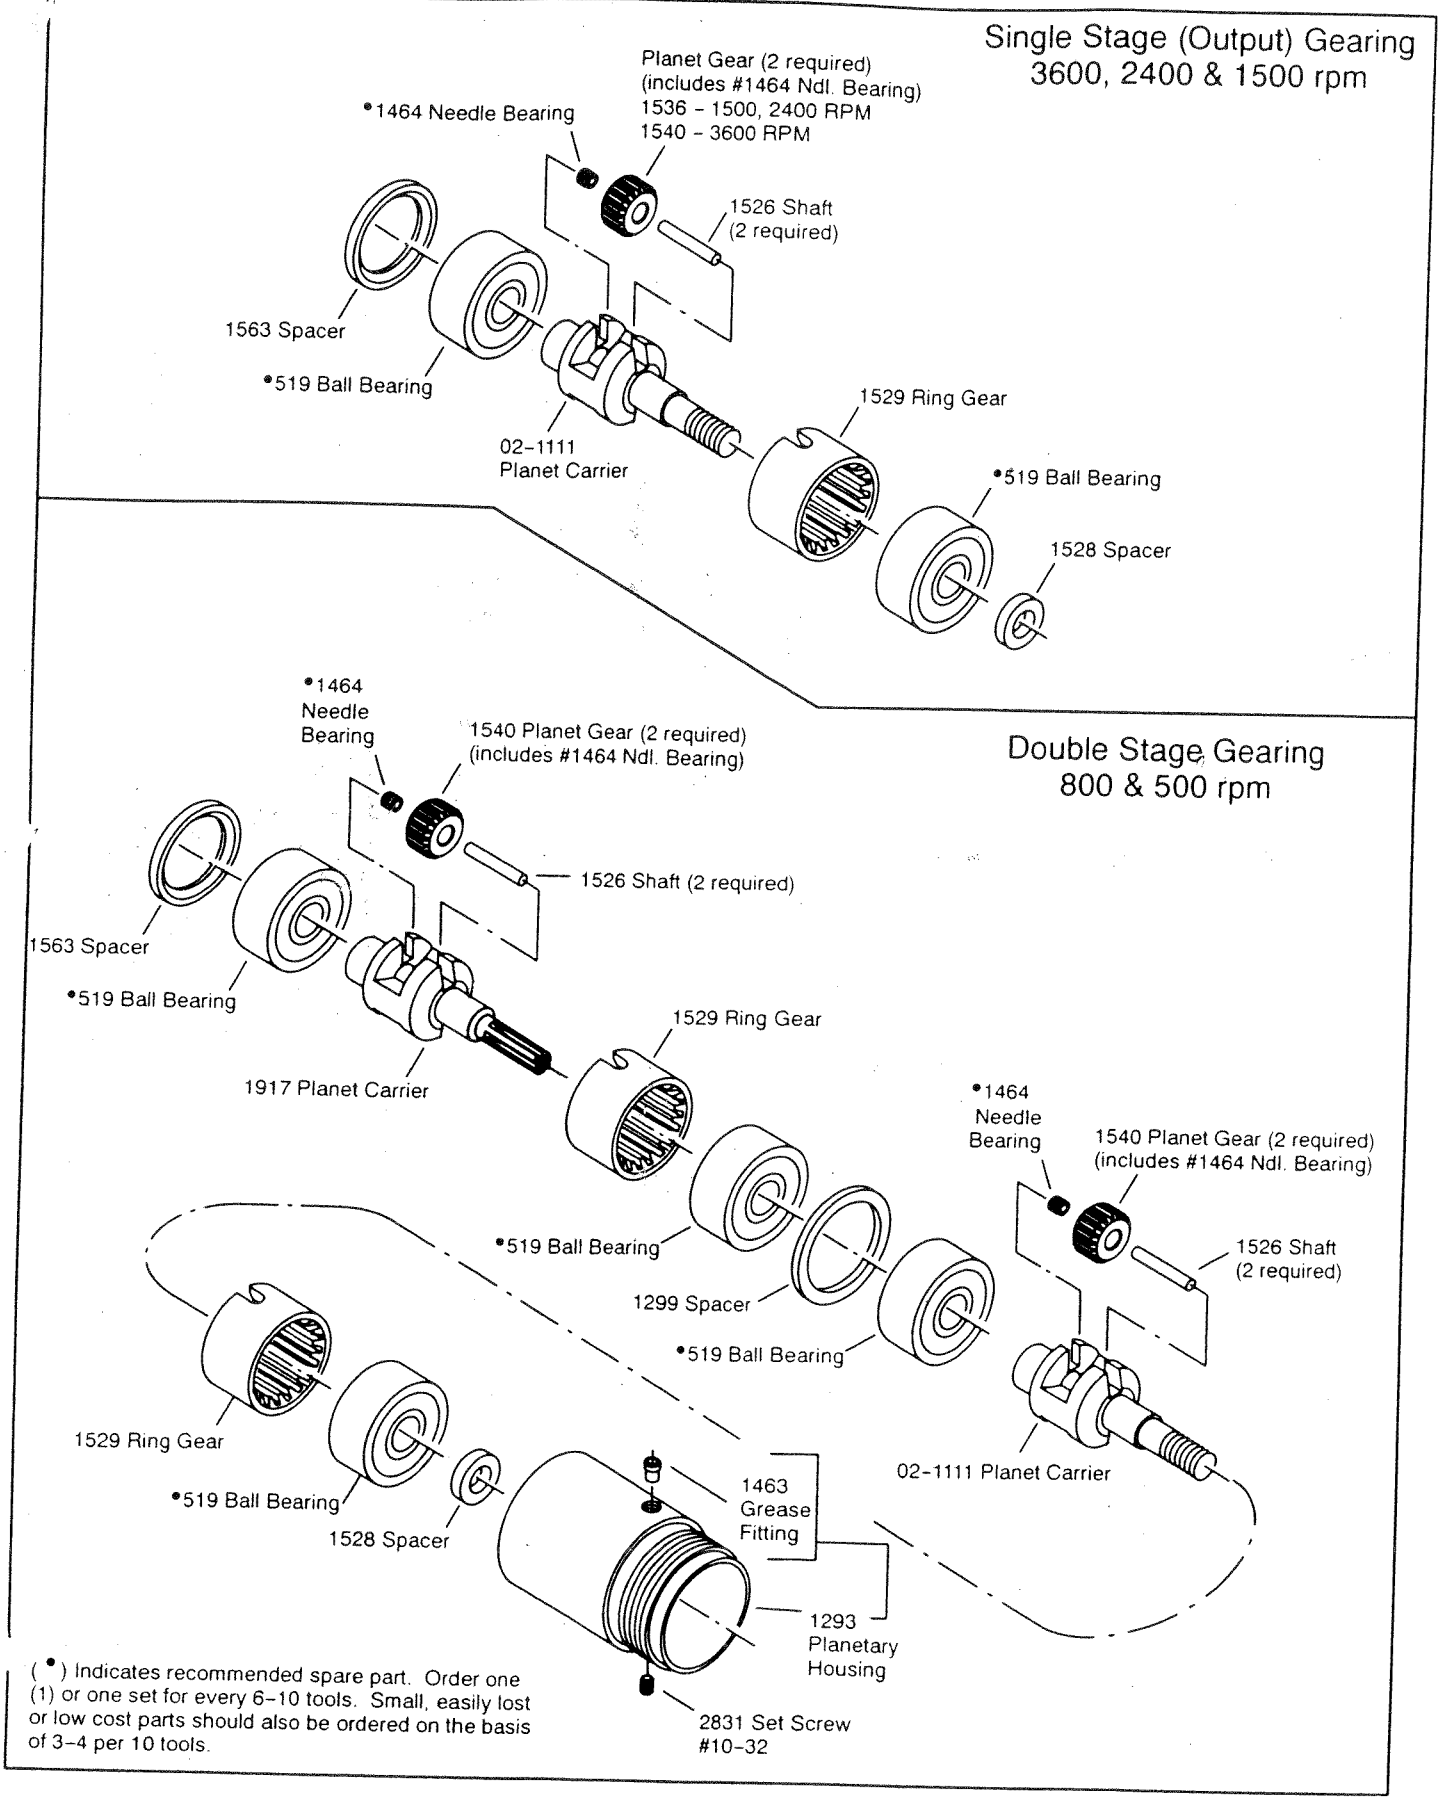

(•) Indicates recommended spare part. Order one (1) or one set for every 6–10 tools. Small, easily lost or low cost parts should also be ordered on the basis of 3–4 per 10 tools.

DOTCO®

Models 15-14 Angle Drills

Angle Head Assembly

