


Bocaro

611990.004 | Bollards

Bollards
4051859158165
LED
L 156, B 156, H 800





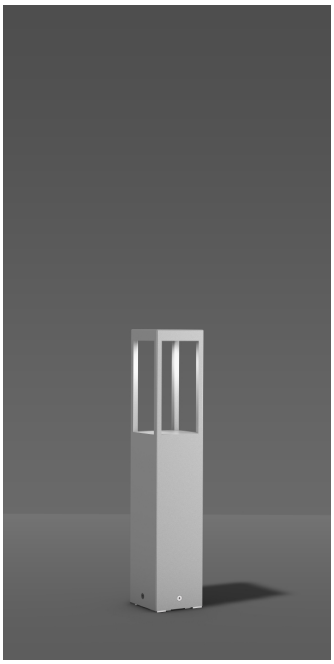

Decorative bollard with square cross section. Housing made of corrosion-resistant aluminium for outdoor use, powder coated. With recessed stainless steel fixing bracket. Clear glass LED protection cover. Connection box on base, max. 2 x 3 x 2.5 mm^2 for loop through.

Colour

Colour	silver metallic

Dimensions

Length L	156 mm
Width B	156 mm
Height H	800 mm
Weight	6,54 kg

Lamp

Lamp	LED
Colour temperature	3000K
Colour rendering index (CRI)	83
Colour consistency (McAdam)	3
Lifetime	50000 h (L80/B10)

Lighting technology

Beam Angle	115°
Photobiological safety according to EN 62471	Risk group 1

Electrical

Control gear	AC Strom, dim.Ph.an-/abschnitt
Voltage	220 - 240 V / 50 Hz
Luminaires on B10A fuse	40
Luminaires on B16A fuse	60
Luminaires on C10A fuse	65
Luminaires on C16A fuse	102
Colour temperature 1	3.000 K
System power 1	20 W
Rated luminous flux 1	1.600 lm
Glare evaluation UGR (4H 8H) 1	28,4
Luminaire efficacy 1	80 lm/W

Approbations

Type of Protection	IP 66
Protection Class	I
Glow Wire Test	960°C - 30 seconds
Impact Protection	IK06 (1 Joule)
Safety marks	F-mark
Other Marks	WEEE mark
Energy efficiency class LED	A+
Energy class of included lamp	A+

Accessories

982155.010	Accessory for ground installation L 156, B 156, H 401 Aluminium root with anti-sink protection and fixing set