

Instar Pro LED

INSTAR PRO LED ADJ WH WW

3079381



Range features

- Beautifully designed LED Accent downlight perfect for 50W Halogen retrofits with a unique and modern lens aesthetic.
- Optimal solution in size and luminous efficiency for hospitality accent and display lighting applications.
- The Instar Pro LED is offered including a dimmable driver



PRODUCT OVERVIEW

Ordering number	3079381
Average life (Rated) (h)	35000
EAN code	8711971793816
Housing	Aluminium
CRI (Ra)	>80
LOR (%)	100
Beam angle(°)	40°
Colour temperature (K)	3000
Luminous flux (lm)	810
Efficacy (Rated) (lm/w)	58
Voltage (V)	240V
Colour	RAL9016
Included lamp	Integrated LED
IP rating	20
IK rating	02

Instar Pro LED

INSTAR PRO LED ADJ WH WW

3079381

DATA TABLE

General data

Ordering number	3079381
Average life (Rated) (h)	35000
EAN code	8711971793816
E-number SE	7475300
E-number FI	4271048
Range features	Beautifully designed LED Accent down light perfect for 50W Halogen retrofits with a unique and modern lens aesthetic. . Optimal solution in size and luminous efficiency for hospitality accent and display lighting applications. . The Instar Pro LED is offered including a dimmable driver
Product name	INSTAR PRO LED ADJ WH WW
Control gear availability	External
Control gear type	ELECTRONIC
General application	Indoor Lighting, Hospitality and Accent lighting, Reception rooms, lobbies, corridors, bathrooms, changing rooms
Housing	Aluminium
Sales pack quantity	1

Optical data

CRI (Ra)	>80
LOR (%)	100
Beam angle(°)	40°
Colour temperature (K)	3000
Luminous flux (lm)	810
Distribution type	Direct
Optical system	Bright Aluminium Reflector

Electrical data

Efficacy (Rated) (lm/w)	58
Total power consumption (W)	12
Voltage (V)	240V
Drive current (mA)	250
Electrical protection	CLASS II
Total number of lamps	1

Instar Pro LED

INSTAR PRO LED ADJ WH WW

3079381

Physical data


Colour	RAL9016
Lamp included	Yes
Included lamp	Integrated LED
Height (mm)	60mm
Width (mm)	90mm
Length (mm)	90mm
IP rating	20
IK rating	02
Vertical tilt (°)	25°
Cutout diameter (mm)	75mm x 75mm
Recessed depth (mm)	60mm
Diffuser finish	Clear
Diffuser material	Glass

Instar Pro LED

INSTAR PRO LED ADJ WH WW

3079381

PHOTOMETRY

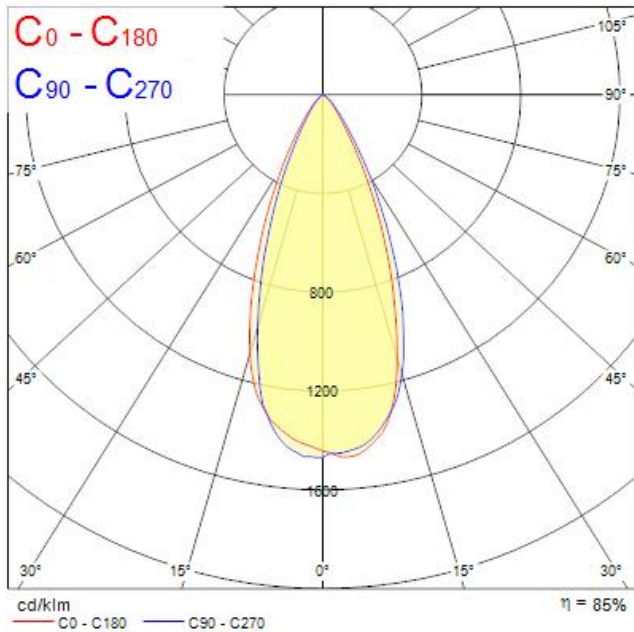

TECHNICAL DRAWINGS

