SIEMENS

Data sheet 3TH4293-0AB0



Figure similar

Contactor relay, 44E, DIN EN 50011, 4 NO + 4 NC, screw terminal AC operation 24 V AC 50 Hz/29 V AC 60 Hz

product designation	Auxiliary contactor
product type designation	3TH4
size of contactor	0
reference code according to IEC 81346-2	K
Substance Prohibitance (Date)	12/31/2099
ambient temperature during operation	-25 ... +55 °C
type of voltage of the control supply voltage	AC
control supply voltage at AC	
● at 50 Hz rated value	24 V
● at 60 Hz rated value	29 V
control supply voltage frequency	
● 1 rated value	50 Hz
● 2 rated value	60 Hz
number of NC contacts for auxiliary contacts	3
● delayed switching	0
● lagging switching	1
● make-before-break switching	1
number of NO contacts for auxiliary contacts	3
● delayed switching	0
● leading contact	1
● make-before-break switching	1
number of CO contacts for auxiliary contacts	0
identification number and letter for switching elements	44 E, 1U
operational current at AC-15	
● at 230 V rated value	10 A
● at 400 V rated value	6 A
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022
height	78 mm
width	45 mm
depth	102 mm
type of electrical connection for auxiliary and control circuit	screw-type terminals
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x Ie
IEC 61508	
T1 value	
● for proof test interval or service life according to IEC 61508	20 a
Electrical Safety	
protection class IP on the front according to IEC 60529	IP00; IP20 with screws tightened, even for contacts not in use

Subject to change without notice
© Copyright Siemens

Approvals Certificates

General Product Approval

CSA | CCC | UK CA | EG-Konf. | UL | EAC


Functional Saftey	Test Certificates				Marine / Shipping
Type Examination Certificate	Type Test Certificates/Test Report	Miscellaneous	Special Test Certificate	Miscellaneous	DNV

other	Railway	Environment
Confirmation	Special Test Certificate	Environmental Confirmations

Further information

Information on the packaging
https://support.industry.siemens.com/cs/ww/en/view/109813875
Information- and Downloadcenter (Catalogs, Brochures,…)
https://www.siemens.com/ic10
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TH4293-0AB0
Cax online generator
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH4293-0AB0
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/en/ps/3TH4293-0AB0
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4293-0AB0&lang=en
Characteristic: Tripping characteristics, I²t, Let-through current
https://support.industry.siemens.com/cs/ww/en/ps/3TH4293-0AB0/char
Further characteristics (e.g. electrical endurance, switching frequency)
http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TH4293-0AB0&objecttype=14&gridview=view1

Subject to change without notice
© Copyright Siemens

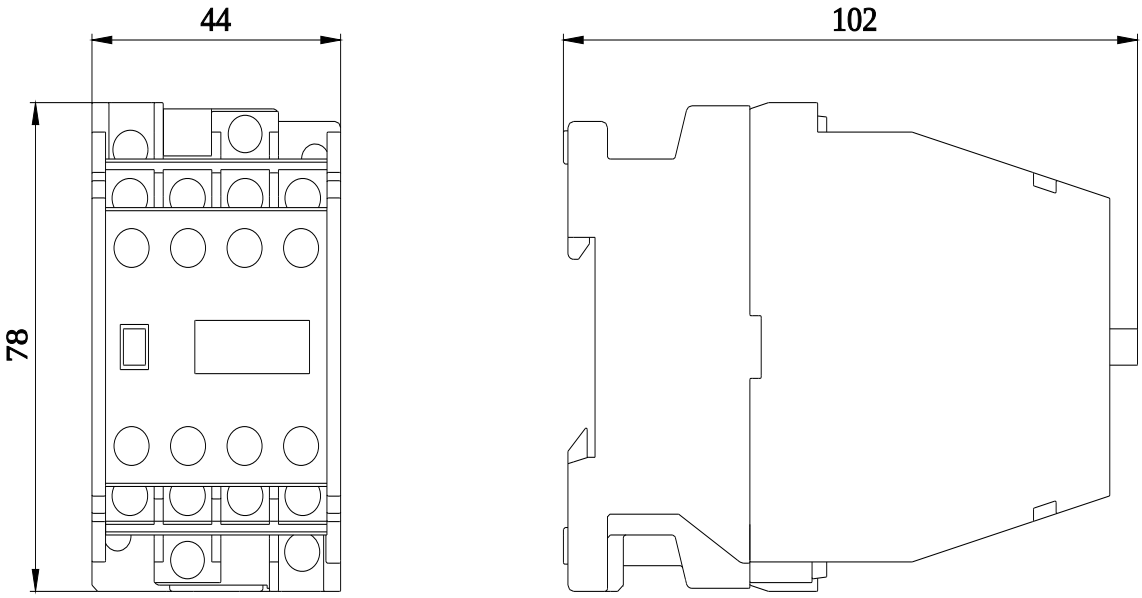

last modified: 12/20/2023

Subject to change without notice
© Copyright Siemens