ETHERMA°
EFFICIENT. ELECTRIC. HEATING.

PRODUCT DATASHEET

Type: 1624-D5-230
Art. Nr.: 36027

0 912005 417715

Short description

Heating mat for thin bed 24V, 1.2m², 50x230cm, 185W

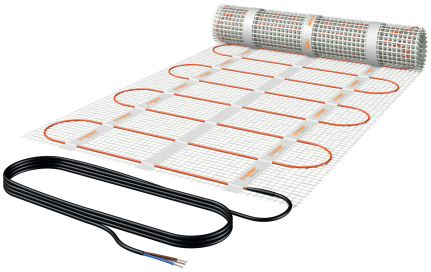

Product Description

The mesh heating mat D is a factory-made heating mat for temperature control of floors, heating of rooms or cold insulation on walls in the protected area - with a nominal voltage of 24 V. Due to the 2.7 mm thin structure, the mesh heating mat enables low floor height construction. The heating mat is self-adhesive and the dipole design guarantees easy installation in the tile adhesive bed - with a virtually magnetic field-free operation. Special processing guarantees 100% reliable, easy installation and high stability of the heating mat. Upon request, we are also happy to custom manufacture mesh heating mat D with custom size, voltage, power and shape. Dipole heating conductor, nominal temperature: 90 °C, heating conductor thickness: 2.7 mm, protection rating: IP X7, grid: 12x12 mm, self-adhesive, CE marking, certification mark: VDE, standard connection cable: 4 m, 2x1.0 (1.5) mm². RoHS and REACH compliant.

ETIM characteristics

Model	Other	**Connection voltage**	24|24 Volt
With support mat	✔	**Connected load**	185|185 Watt
Fixation thermal conductor	Glued	**Power**	160 Watt per square metre
Self-adhesive	✔	**Heating conductor load**	13 Watt per metre
Suitable for damp space	✔	**Resistance**	3.1 Ohm
Suitable as outdoor surface heating	✖	**Number of cold conductors**	1
Suitable as roof surface heating	✖	**Length of cold conductors**	400 Millimetre
With controller	✖	**Surface**	1.2 Square metre
With room temperature controller	✖	**Length**	2300 Millimetre
With floor temperature sensor	✖	**Width**	500 Millimetre
		Thickness	2.7 Millimetre

Created on: 27/11/2023

ETHERMA Elektrowärme GmbH
Landesstrasse 16
A-5302 Henndorf am Wallersee
Tel.: +43 6214 / 76 77
Mail: office@etherma.com
Web: www.etherma.com

ETHERMA Deutschland GmbH
Bahnhofstraße 40
D-48599 Gronau
Tel.: +49 2562 / 81 97 00
Mail: office.de@etherma.com
Web: www.etherma.com