


L52 Series LED Module

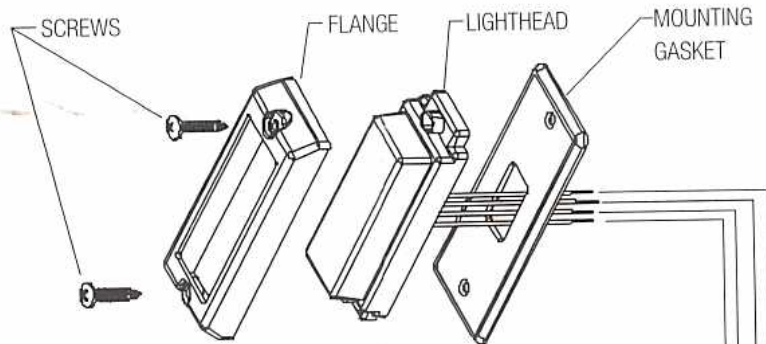

To +VDC (fuse @ 2A) ----- **RED**

To Chassis Ground ----- **BLACK**

For Simultaneous or Alternating Flash ----- **BLUE**

Group 1 Heads: (Wiring- BLUE connected to BLACK) will with touch

Group 2 Heads: (Wiring- BLUE not connected to BLACK) will with touch

Group 1 Heads will alternate with Group 2 Heads

For Synchronization & Flash Patterns ----- **YELLOW**

Connect YELLOW wires of all heads together for synchronization

FLASH PATTERN

PA1 ; A1 - FIVE FLASH P1	PA7 ; A7 - SINGLE FLASH P1
PA2 ; A2 - FIVE FLASH P2	PA8 ; A8 - SINGLE FLASH P2
PA3 ; A3 - QUAD FLASH P1	PA9 ; A9 - TRIPLE FLASH P1
PA4 ; A4 - QUAD FLASH P2	PA10 ; A10 - TRIPLE FLASH P2
PA5 ; A5 - DOUBLE FLASH P1	PA11 ; A11 - STEADY BURN
PA6 ; A6 - DOUBLE FLASH P2	PA12 ; TURN OFF

To select Flash Pattern, apply BLUE to BLACK wire :

- less than 1 second for next pattern
- 1 to 3 seconds for Steady Burn
- more than 1 second for previous pattern
- more than 5 seconds for turn off